




BeCu Fingerstock & Gasket Catalogue(A9)

BeCu Strips; BeCu Spring; SMD Spring; EMI Gasket

(Passed IATF16949:2016 quality management system and ISO9001:2015 dual certification enterprise)

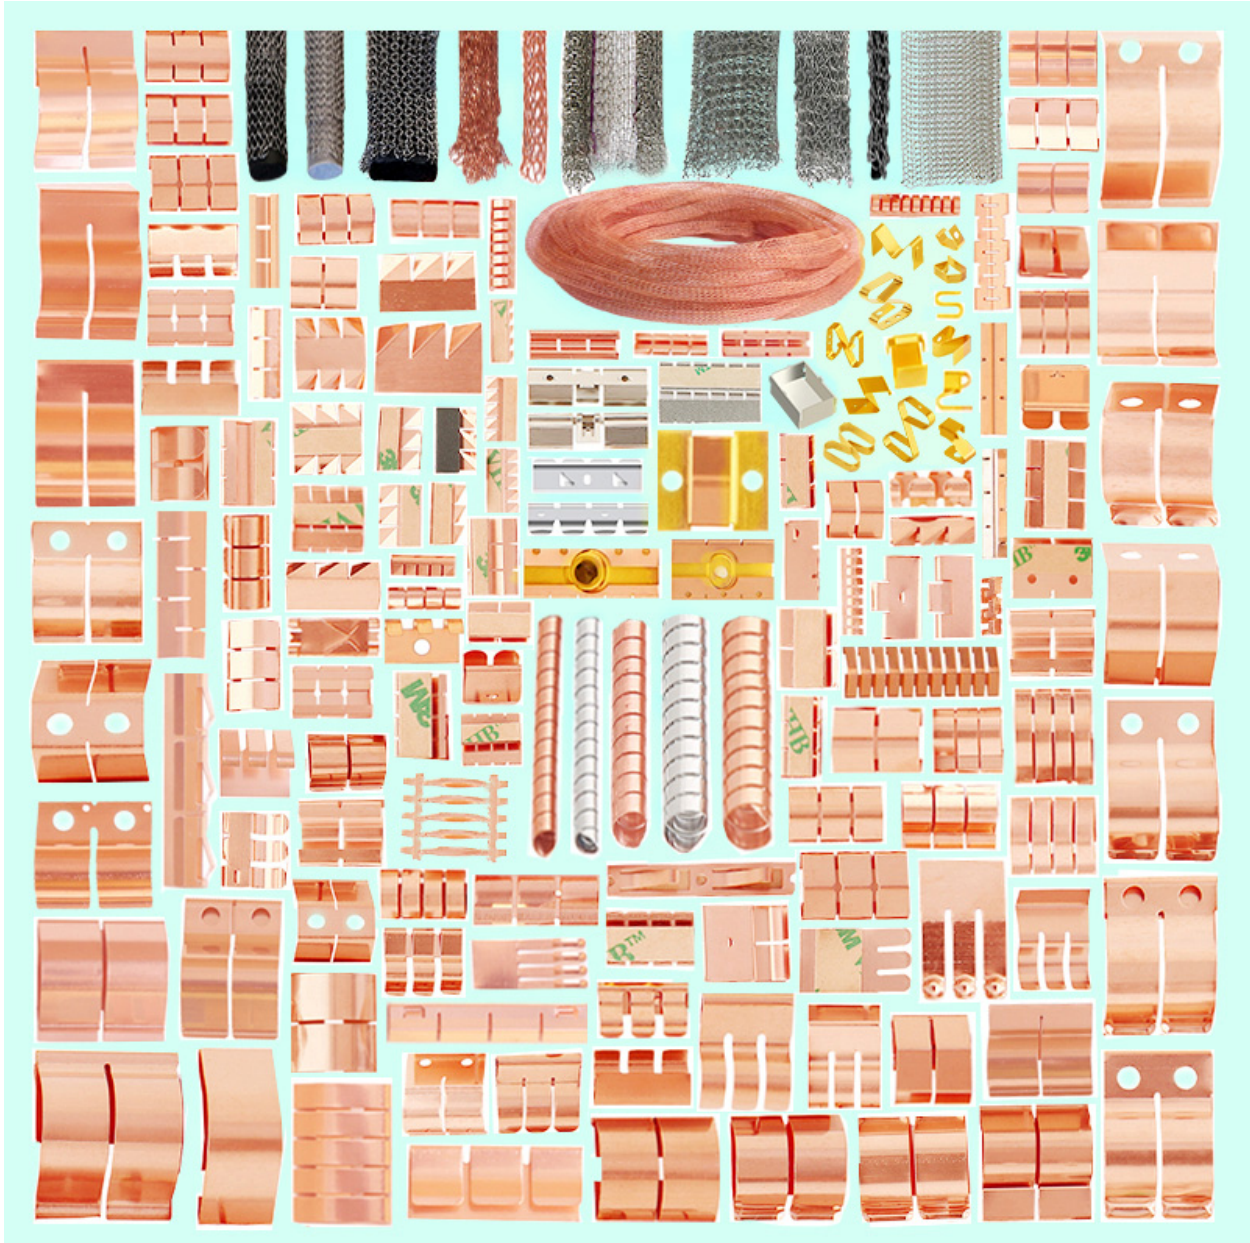

Over 18 Years Factory Technology accumulation & Over 300 Items can be shared

- Superior Resilience Performance: Non-deformation After Compressed 10,000 Times.
- High Shielding Performance. Electromagnetic Plane Wave:80-120dB.Plane Wave(2GHz):75-120dB.
- Over 300 Items Standard Off -The Shelf Strips. Free Samples High Quality & Best Prices.
- Fast Delivery .Support OEM & ODM. Total Value Of factory Equipments Over \$3 million.
- ISO9001 Quality Certificate Factory. Factory Outlet With Best Price Advantages.
- All Products(including Plating)Can Fulfil SGS.ROHS.REACH etc ,Environmental Requirements.

■ Don't hesitate to contact me if have any questions. **E-mail: sales@emis-tech.com**

Manufactured by: ShenZhen EMIS Electronics Materials Co., Ltd.

Updated Date:July 1st, 2025 (the latest catalog. Visit: www.emis-tech.com)

Excellent Performance Of Beryllium Copper Gasket Made In EMIS:

- Superior Resilience Performance : Non-deformation After Compressed 10,000 Times.
- Electrical Shielding Effectiveness 80-100dB ; H-field(200 MHZ) 60-70dB.
- Plane Wave(2 GHZ) 75-120dB ; Shielding Effectiveness: >110dB for a 100 MHz Plane.
- Fast Delivery & Reliable Quality. Excellent Conductivity & Dimensional Stability.
- Wide Temperature Variation And Non-magnetic. Varieties Of Mounting Options&Sizes And Configurations
- Low Compression Force. Maximum Spring Properties. Highest Strength Copper Alloy With High Cycle Time.
- Conforms To Large Gap Variations. Excellent for Bi-directional Applications. ROHS Compliant.
- Widely Used For Communications, Computer .Cabinet, Medical Devices. New Energy Equipments.


Don't hesitate to contact me if have any questions. E-mail: sales@emis-tech.com

Lastest Product Catalog


SMD Spring with Gold plated




Shielded Room Becu Shielding Strips I

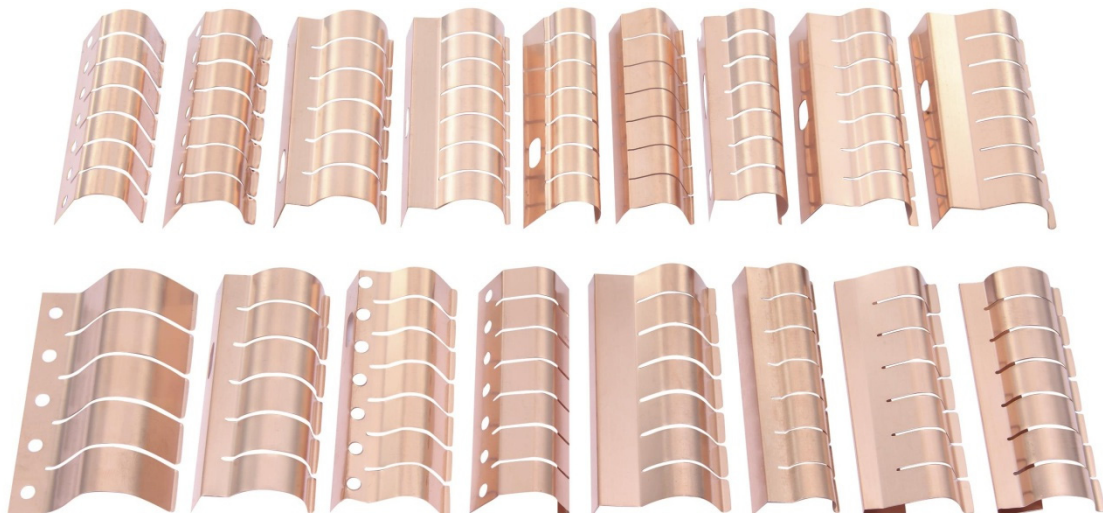


Shielded Room Becu Shielding Strips II

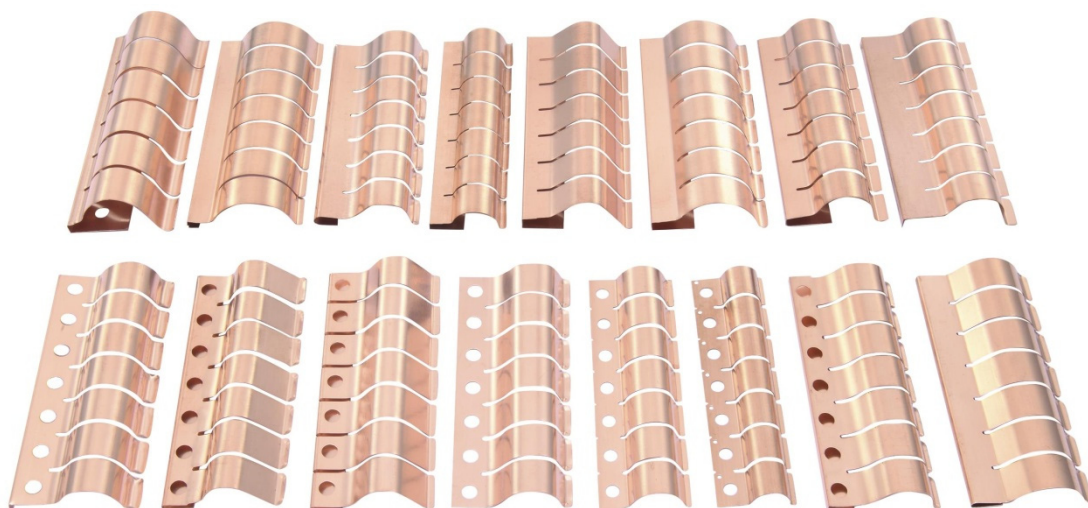


Single Slot Series Becu Strips

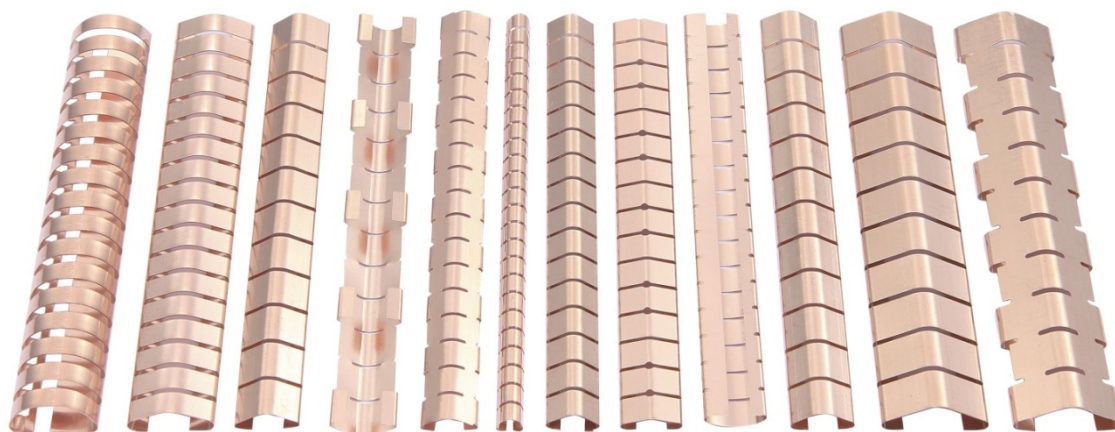


Various Slots Series Becu Strips

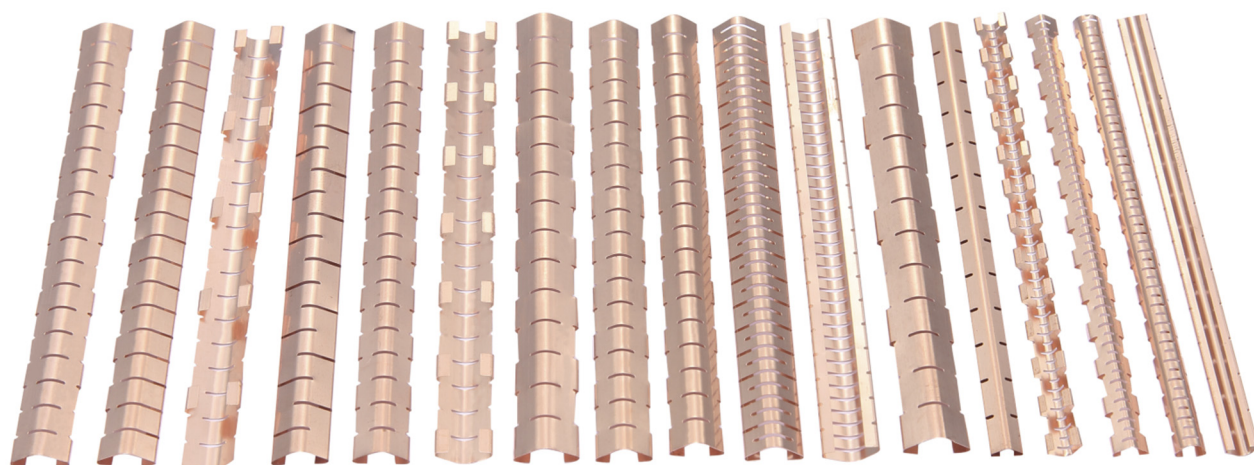


Twisted Series Becu Strips

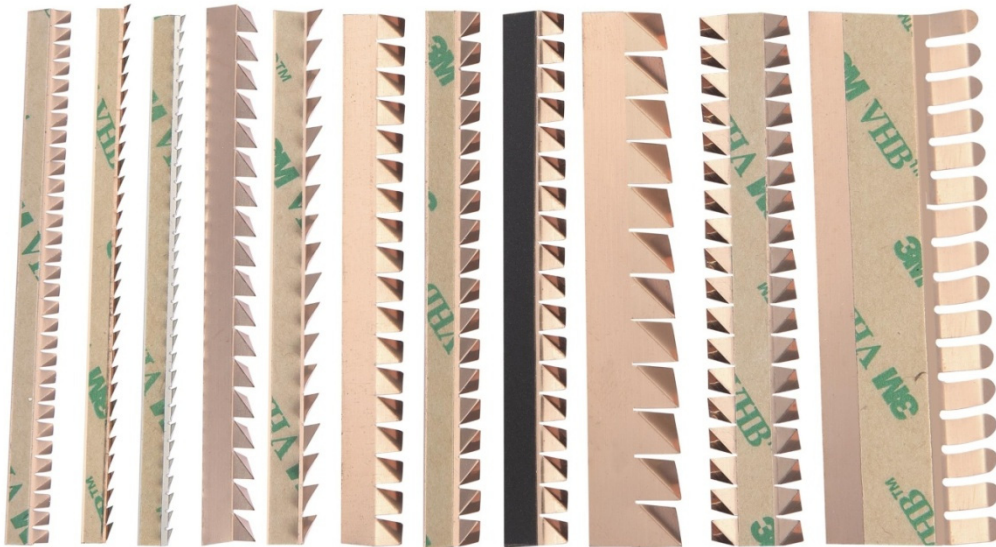


No Snag & Foldover Becu Strips

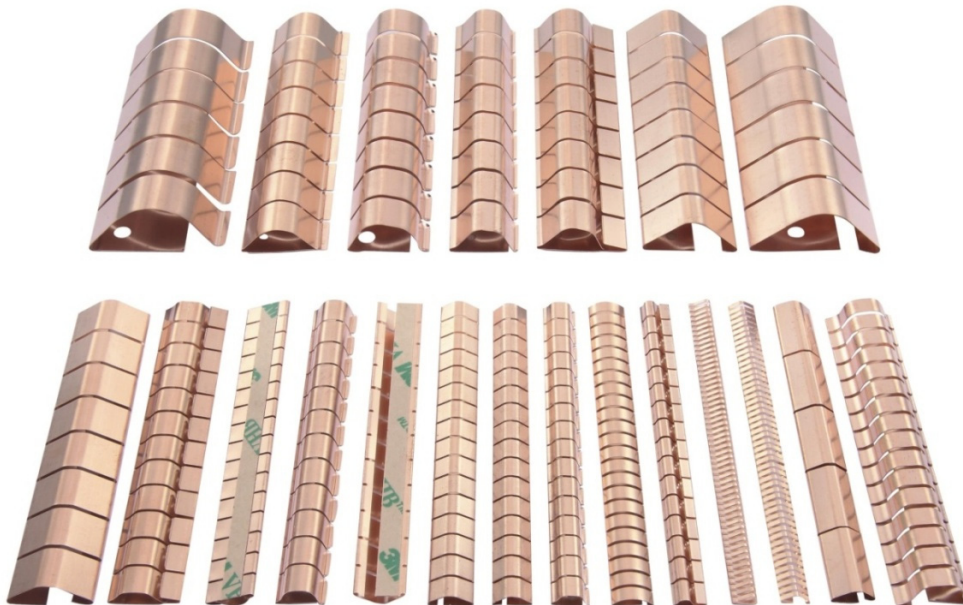


Clip-On Becu&SUS EMI Strips

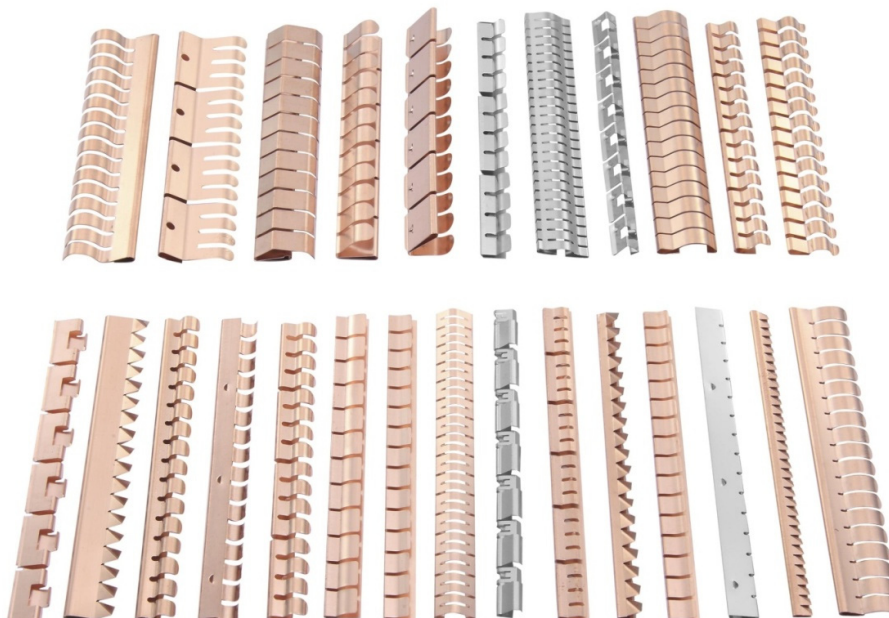


Contact Series BeCu Strips

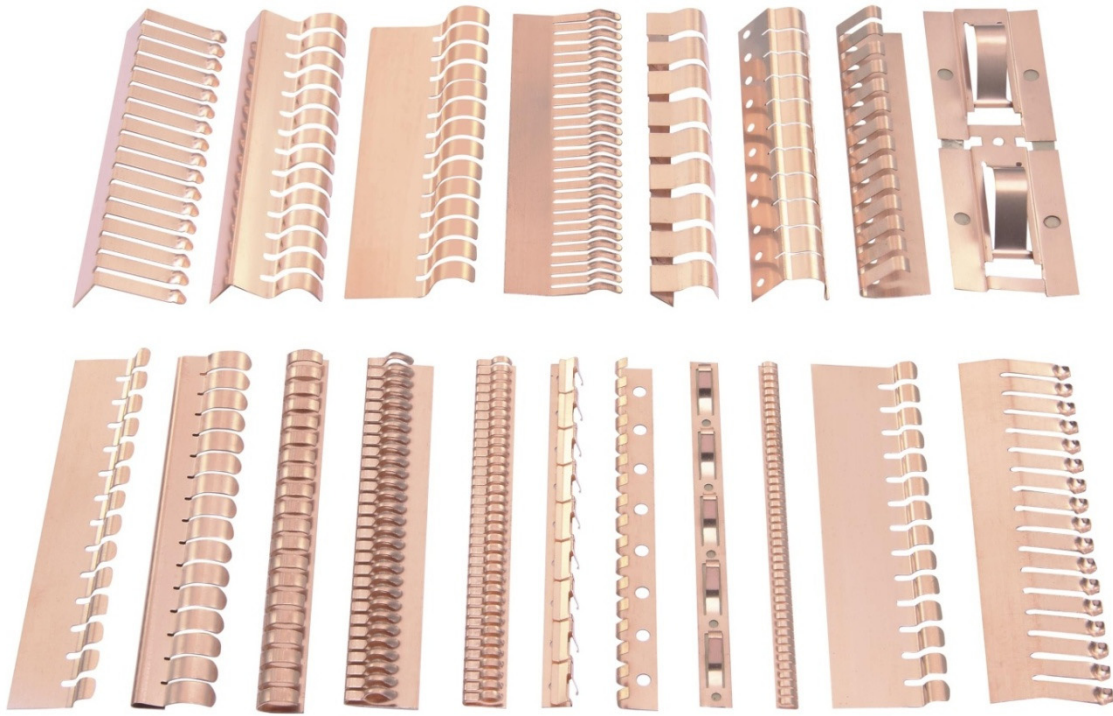


Low Profile & ESD Grounding BeCu Strips

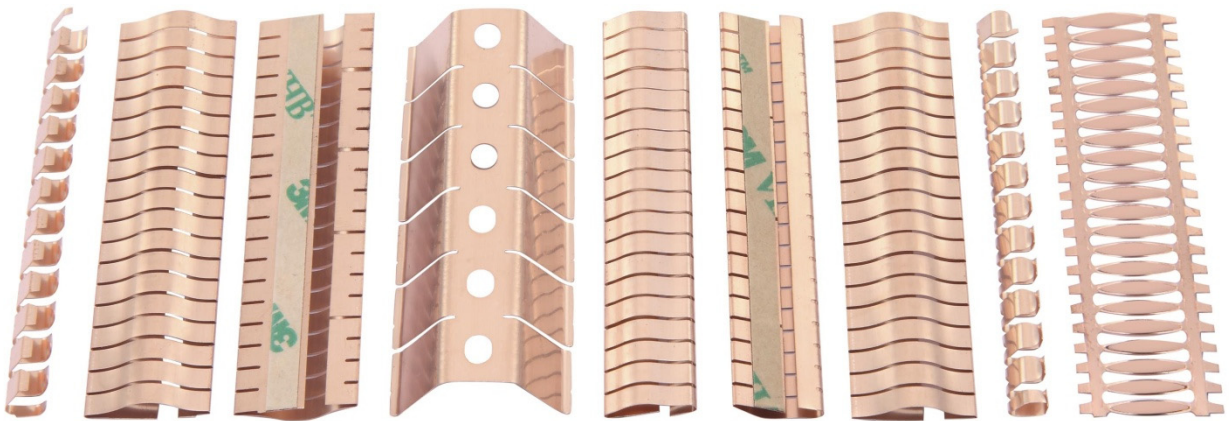

Solid top symmetrical slotted BeCu Strips

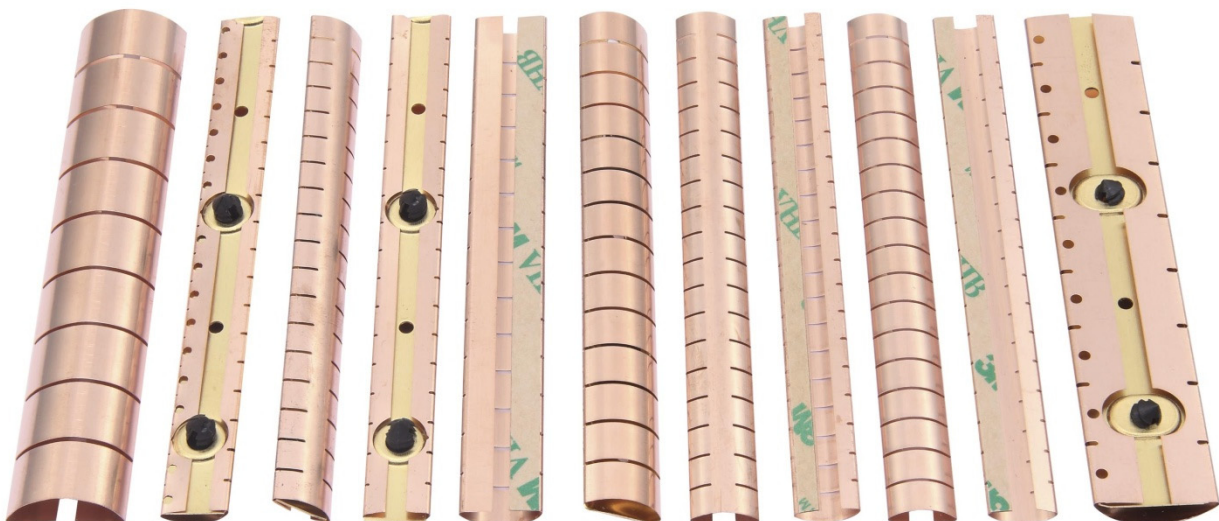

Beryllium Copper Spring & Stamping Parts

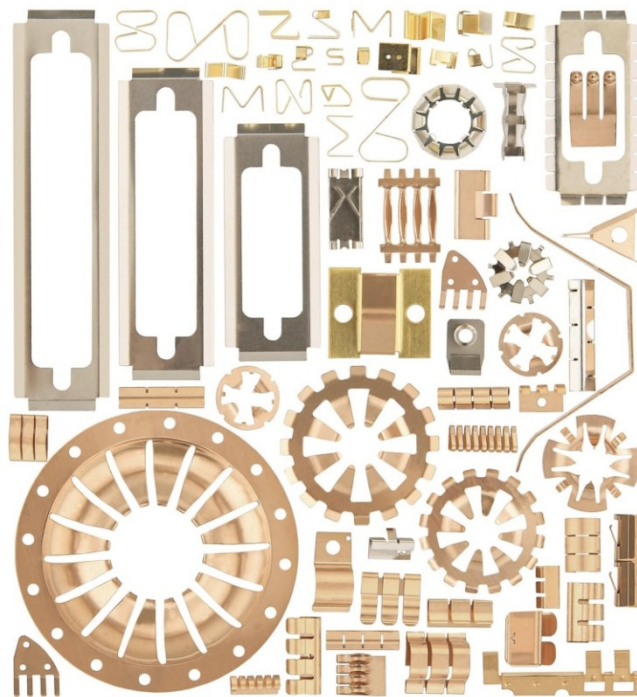

Note: A9: released date: June 1st, 2024; A8: released date: Jan 1st, 2023; Added as below:


CATALOG

1.Product General Summary-----	P1---P6
2.SMD Spring(No.1---No.14)-----	P7---P8
3.Shielded room BeCu Spring(No.15---No.55)-----	P9---P21
4.Single slot mount series(No.56---No.67)-----	P22---P24
5.Dual slots mount series(No.68---No.80)-----	P25---P28
6.Twist series gasket(No.81---No.91)-----	P29---P31
7.No snag gasket(No.92---No.115)-----	P32---P38
8.Clip-on gasket series(No.116---No.141)-----	P39---P45
9.Contact Finger stock series(No.142---No.162)-----	P46---P51
10.Low profile & ESD ground series(No.163---No.168)-----	P51---P52
11.Solid top symmetrical slotted shielding(No.169---No.173) -----	P53---P54
12.Dome shape model gasket(No.174---No.178) -----	P54---P55
13.Assembled gasket+BeCu EMI spring(No.179---No.185)-----	P55---P57
Factory profile & Production Process-----	P58---P66

Product Structure and Dimensions as below: (all items have stock or tooling)


One. SMD Spring (No.1--- No.14, Total 14 Items)

1. SMD-6565





Spec: 0.1mm*6.5*6.5*2mm

3. SMD-9075




Spec: 0.1mm*9*7.5*2.5mm

5. SMD-0203




Spec: 0.1mm*3.2*3*2mm

7. SMD-4545




Spec: 0.1mm*4.5*4.5*2mm

9. SMD-1325




Spec: 0.1mm*13*2.5*4.8mm

2. SMD-9016




Spec: 0.15mm*9*16*2.5mm

4. SMD-7371





Spec: 0.1mm*7.3*7.1*2.5mm

6. SMD-0535




Spec: 0.1mm*5*3.5*4mm

8. SMD-0505





Spec: 0.1mm*6*5*5mm

10. SMD-7048





Spec: 0.1mm*7*4.8*2.5mm

11. SMD-2625




Spec: 0.1mm*2.6*2.5*1.5mm

13. SMD-3852




Spec: 0.1mm*6*5.2*3.8mm

12. SMD-0425



Spec: 0.15mm*5.6*4*2.5mm



14. SMD-5245



Spec: 0.1mm*5.2*4.5*2.5mm

Two. Shielding room Enclosure Series (No.15 --- No.55; Total 41 Items)



15. MB-1535-01

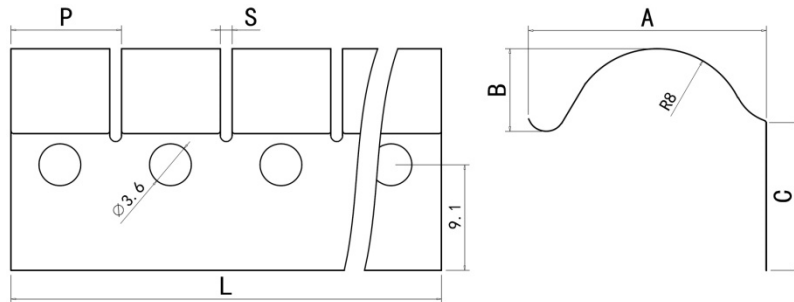

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1535-01	0.127	19.8	6.6	13	9.52	1.01	304 mm	32	Bright Finish (Length 406mm shipped)
MB-1535-01	0.127	19.8	6.6	13	9.52	1.01	608 mm	64	
MB-1535C-01	0.127	19.8	6.6	13	9.52	1.01	7.62 M	800	
MB-2535-01	0.1	19.8	6.6	13	9.52	1.01	608 mm	64	

Notes: ①MB-1535-0N Nickel Plated; MB-1535-0S Tin Plated; Can Plate Gold. Silver & Zinc etc; ②Can cut into X nodes, X=1.2...; ③Can use 0.1mm made;


16. MB-1640-01

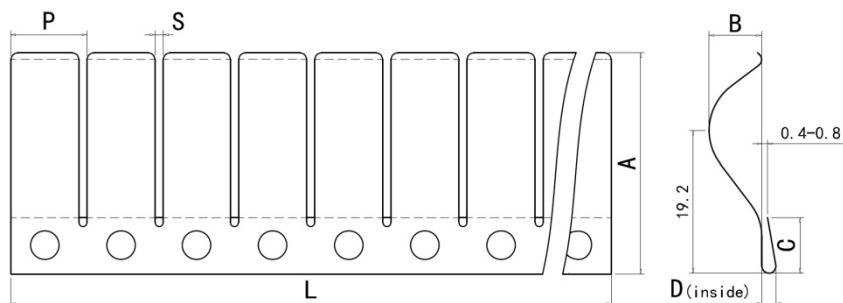

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1640-01	0.127	27	6.8	7.1	1.8	9.52	1.01	408 mm	43	Bright Finish (D Lance or T lance)
MB-2640-01	0.1	27	6.8	7.1	1.8	9.52	1.01	408 mm	43	

Notes: ①MB-1640-0N Nickel Plated; MB-1640-0S Tin Plated; Can Plate Gold. Silver & Zinc etc; ②Size D range 1.5-3.0mm, New P/N: MB-1640D-01; ③Can use 0.1mm made;


17. MB-1640U-01

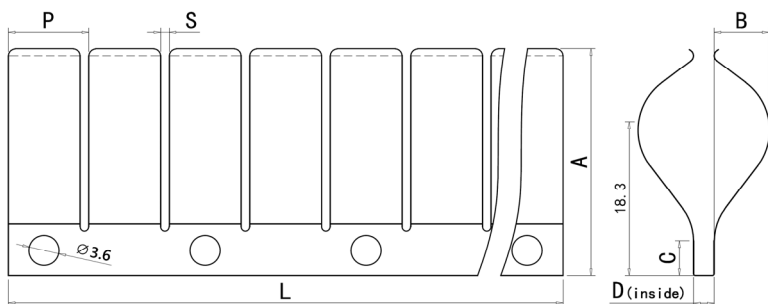

产品料号	T(mm)	A	B	C	D	P	S	L最长	节数	外观
MB-1640U-01	0.127	27	6.4	7.5	2.00	9.56	1.0	400 mm	42	本色

注: ①MB-1640U-0N光亮镀镍; MB-1640U-0S光亮镀锡; 表面也可镀金、银、锌等; ② D可做到1.5-3.0mm之间, 对应料号: MB-1640UD-01; ③也可用0.1mm厚度生产;



18. MB-1682-01

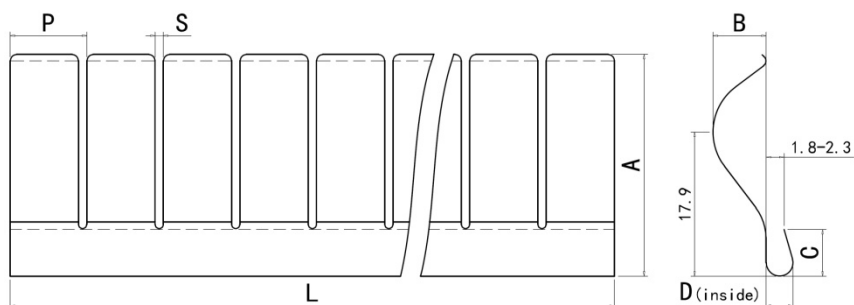

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1682-01	0.127	27.5	6.6	5.8	3.1	9.52	1.01	408 mm	43	Bright Finish (D Lance or T lance)
MB-2682-01	0.1	27.5	6.6	5.8	3.1	9.52	1.01	408 mm	43	

Notes: ①MB-1682-0N Nickel Plated; MB-1682-0S Tin Plated; Can Plate Gold, Silver & Zinc etc; ②Size D range 1.5-3.0mm, New P/N: MB-1682D-01; ③Can use 0.1mm made;



19. MB-1368-01

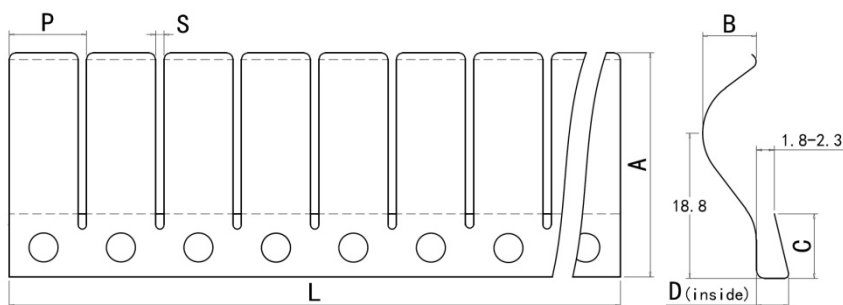


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1368-01	0.127	27	6.6	6.4	3.0	9.52	1.01	408 mm	43	Bright Finish (D Lance or T lance)
MB-2368-01	0.1	27	6.6	6.4	3.0	9.52	1.01	408 mm	43	

Notes: ①MB-1368-0N Nickel Plated; MB-1368-0S Tin Plated; Can Plate Gold, Silver & Zinc etc; ②Size D range 1.5-3.0mm, New P/N: MB-1368D-01; ③Can use 0.1mm made;

20. MB-LD40-01

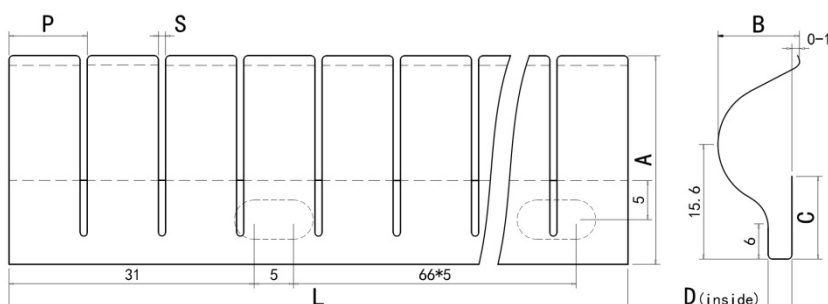


The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

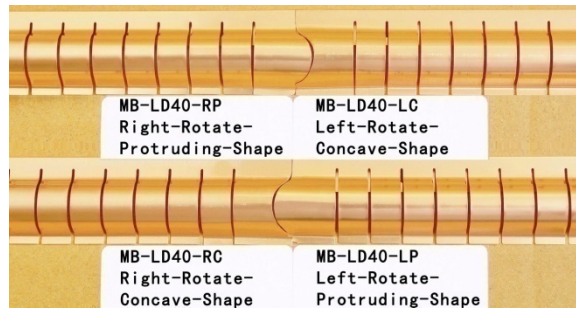


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-LD40-01	0.15	26	10	10.7	3.0	9.95	1.0	407 mm	41	Bright Finish
MB-2LD40-01	0.127	26	10	10.7	3.0	9.95	1.0	407 mm	41	Bright Finish

Notes:①MB-LD40-0N Nickel Plated;MB-LD40-0S Tin Plated; Plate Gold, Silver &Zinc etc; ②Size D range 1.5-3.0mm, New P/N:MB-LD40D-01;③Can use 0.127mm made;

21. MB-LD35-01

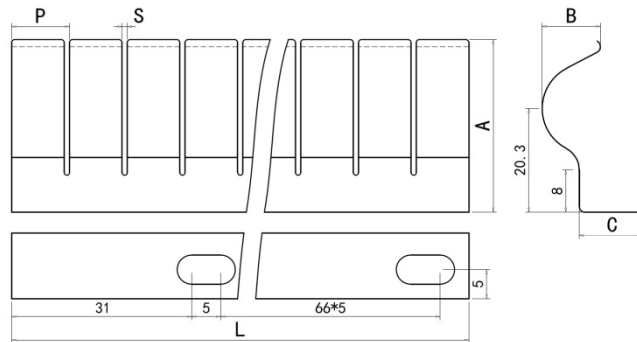


The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

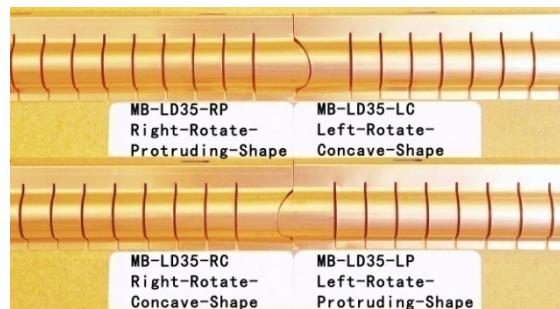


Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-LD35-01	0.15	29	10	11.3	9.95	1.0	407 mm	41	Bright Finish
MB-2LD35-01	0.127	29	10	11.3	9.95	1.0	407 mm	41	Bright Finish

Notes:①MB-LD35-0N Nickel Plated;MB-LD35-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1,2...; ③Can use 0.127mm made;

22. MB-1740-01

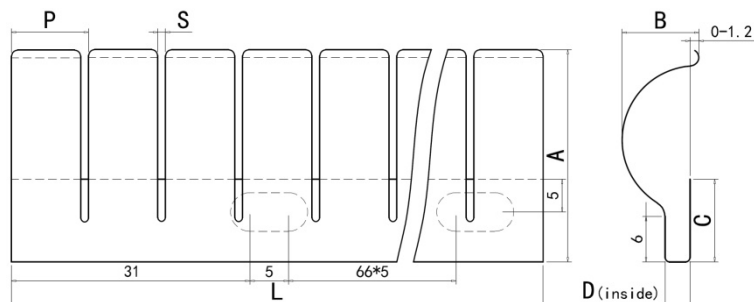


The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

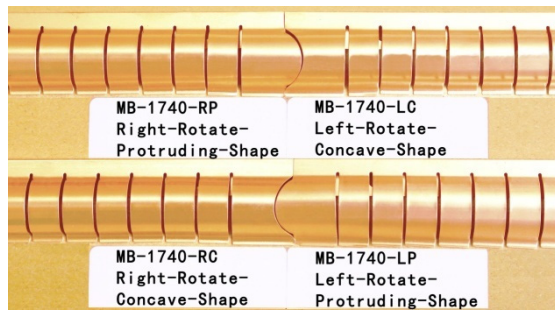


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1740-01	0.15	26	10	11	3.0	10	1.0	409 mm	41	Bright Finish
MB-2740-01	0.127	26	10	11	3.0	10	1.0	409 mm	41	Bright Finish

Notes:①MB-1740-ON Nickel Plated;MB-1740-OS Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-1740D-01;③Can use 0.127mm made;

23. MB-1735-01

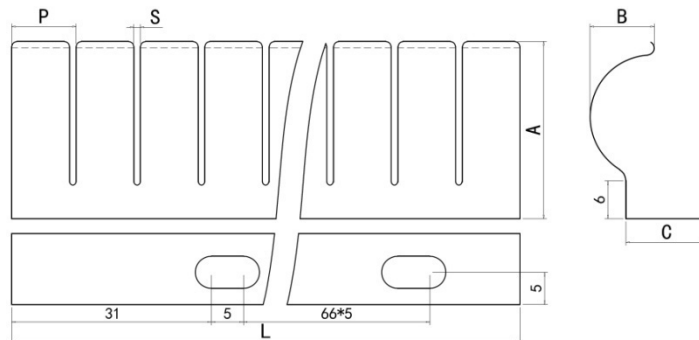


The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

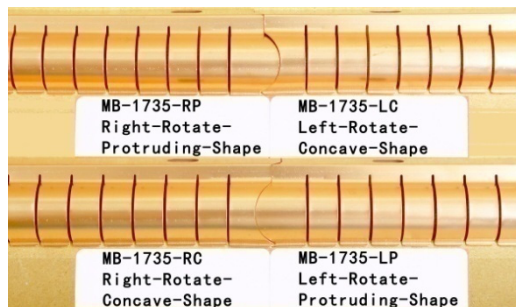

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1735-01	0.15	26	10	11	10	1.0	409 mm	41	Bright Finish
MB-2735-01	0.127	26	10	11	10	1.0	409 mm	41	Bright Finish

Notes:①MB-1735-ON Nickel Plated;MB-1735-OS Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.127mm made;



24. MB-1175-01

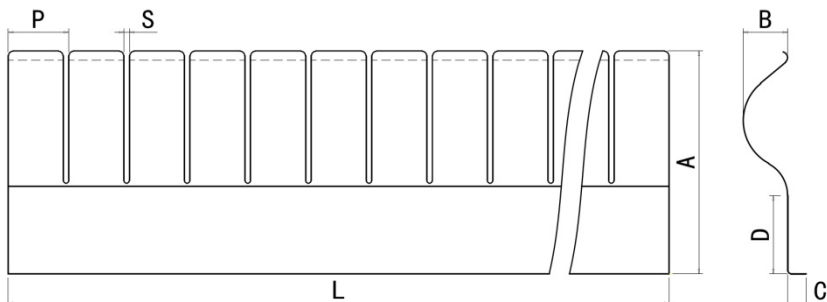

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1175-01	0.15	37	7.5	3	14.5	9.95	0.9	407 mm	41	Bright Finish
MB-2175-01	0.127	37	7.5	3	14.5	9.95	0.9	407 mm	41	Bright Finish

Notes:①MB-1175-ON Nickel Plated;MB-1175-OS Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③Can use 0.127mm made;



25. MB-1311-01

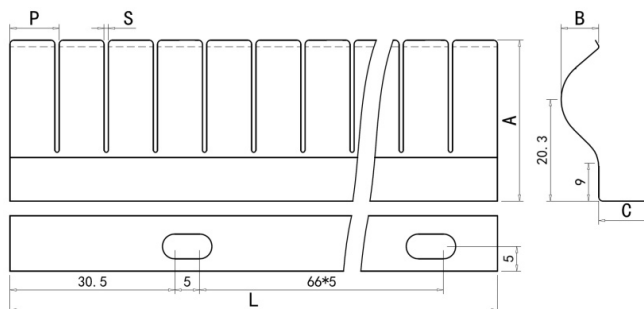


Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1311-01	0.15	32.5	7.5	11.3	9.95	1.0	407 mm	41	Bright Finish
MB-2311-01	0.127	32.5	7.5	11.3	9.95	1.0	407 mm	41	Bright Finish

Notes:①MB-1311-0N Nickel Plated;MB-1311-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.127mm made;

26. MB-1308-01

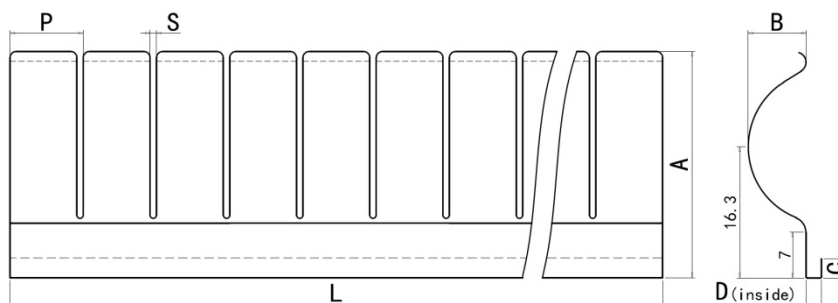



The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

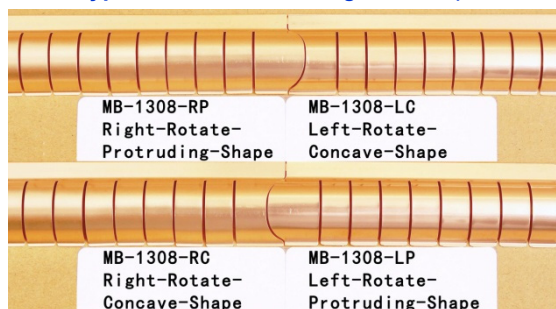

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1308-01	0.127	30.7	8	2.7	2.05	9.95	0.9	407 mm	41	Bright Finish
MB-2308-01	0.1	30.7	8	2.7	2.05	9.95	0.9	407 mm	41	Bright Finish

Notes:①MB-1308-0N Nickel Plated;MB-1308-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-1308D-01;③Can use 0.1mm made;


27. MB-1438-01

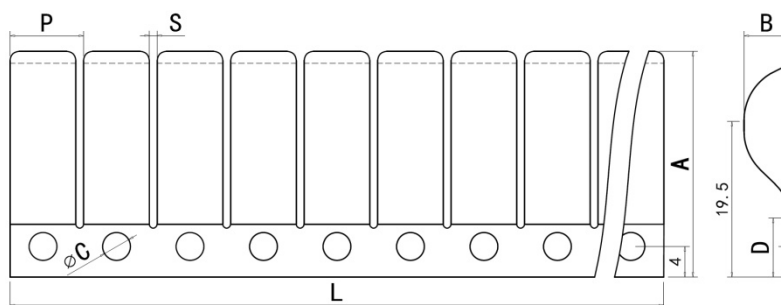

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1438-01	0.127	27	6.6	3.6	7.0	9.52	1	304 mm	32	Bright Finish (Length 406mm shipped)
MB-1438-01	0.127	27	6.6	3.6	7.0	9.52	1	608 mm	64	
MB-1438C-01	0.127	27	6.6	3.6	7.0	9.52	1	7.62 M	800	Bright Finish (Coil)

Notes:①MB-1438-0N Nickel Plated;MB-1438-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③Can use 0.1mm made;



28. MB-1396-01

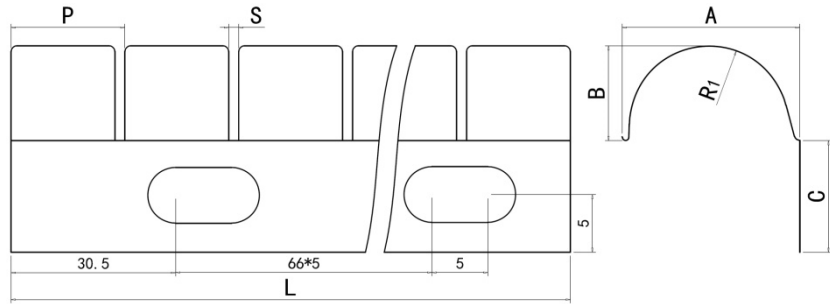

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1396-01	0.127	15	8.5	10	8.0	10.2	1	396 mm	39	Bright Finish

Notes:①MB-1396-0N Nickel Plated;MB-1396-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


29. MB-1178-01

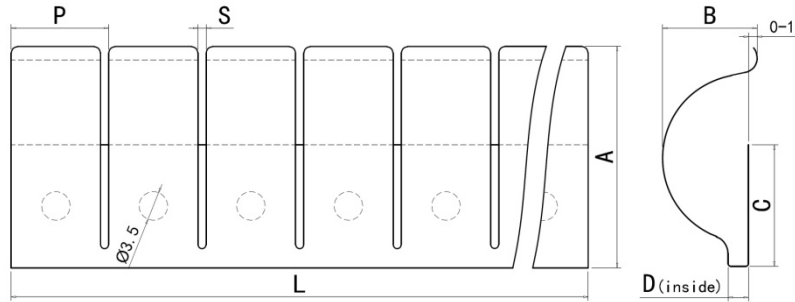

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1178-01	0.2	27	11	15.2	2.5	12	1.0	203 mm	17	Bright Finish

Notes:①MB-1178-0N Nickel Plated;MB-1178-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-1178D-01;



30. MB-1440-01

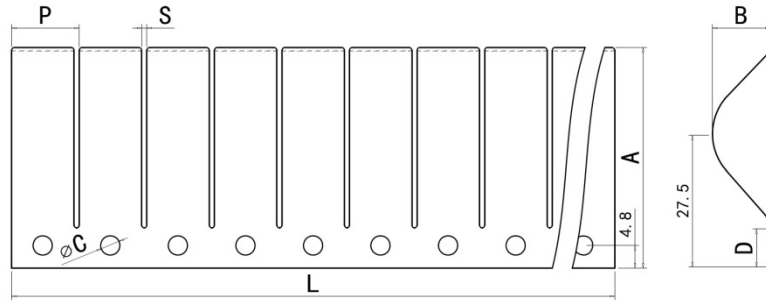

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1440-01	0.15	40.6	10.8	3.6	7.2	12.7	1	609 mm	48	Bright Finish
MB-1440C-01	0.15	40.6	10.8	3.6	7.2	12.7	1	7.62 M	600	Bright Finish (Coil)
MB-2440-01	0.18	40.6	10.8	3.6	7.2	12.7	1	609 mm	48	Bright Finish

Notes:①MB-1440-0N Nickel Plated;MB-1440-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③Can use 0.18mm made;


31. MB-CA40-01

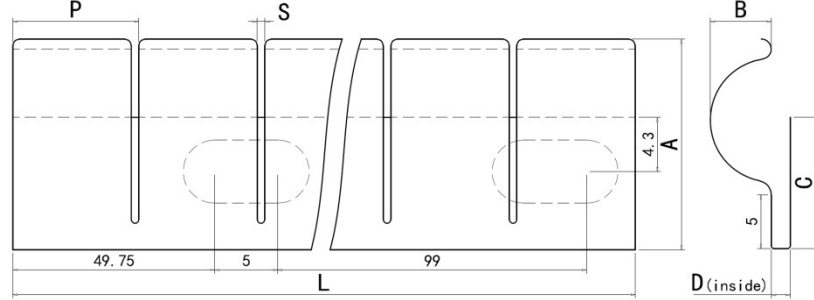

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-CA40-01	0.1	17	4.8	10.5	1.5	10	0.6	199.5 mm	20	Bright Finish

Notes:①MB-CA40-0N Nickel Plated;MB-CA40-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-CA40D-01;


32. MB-CA35-01

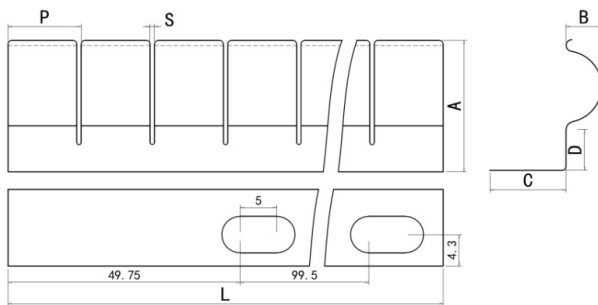

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-CA35-01	0.1	19	4.8	10.5	5.5	10	0.6	199.5 mm	20	Bright Finish

Notes:①MB-CA35-0N Nickel Plated;MB-CA35-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


33. MB-1534-01

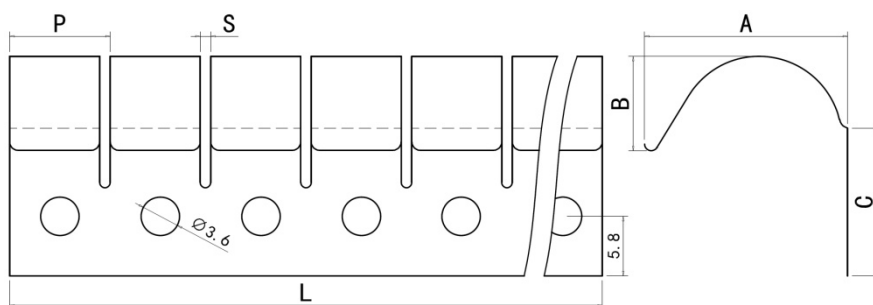

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1534-01	0.1	18.9	10	14	9.52	1.01	608 mm	64	Bright Finish

Notes:①MB-1534-0N Nickel Plated;MB-1534-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



34. MB-1535L-01

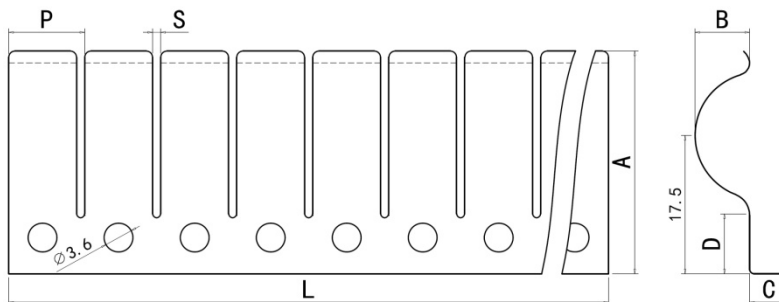

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1535L-01	0.127	28.5	6.6	4.81	8.5	9.52	1.01	408mm	43	Bright Finish

Notes:①MB-1535L-0N Nickel Plated;MB-1535L-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;



35. MB-T788-01

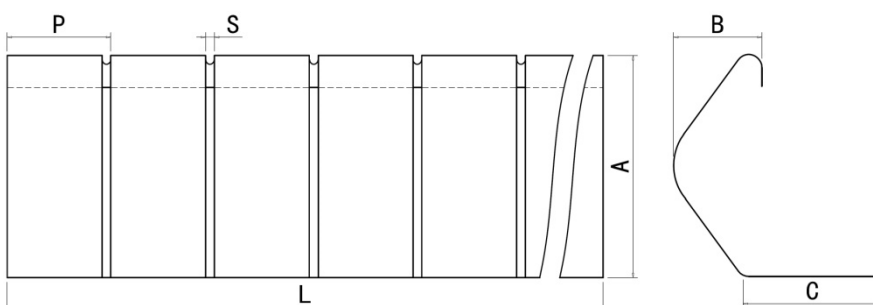

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-T788-01	0.127	20.3	8.13	13	9.52	0.8	304 mm	32	Bright Finish

Notes:①MB-T788-0N Nickel Plated;MB-T788-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


36. MB-KA40-01

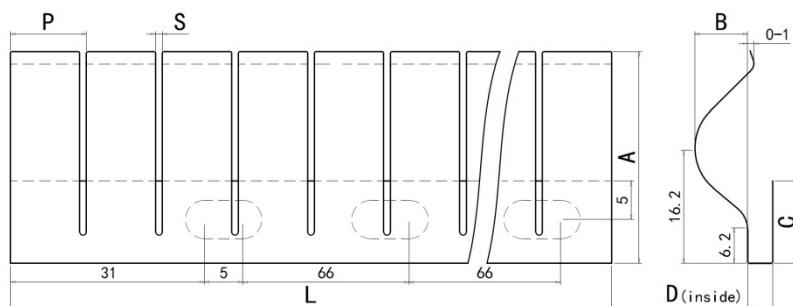


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-KA40-01	0.15	28.5	7.5	10.5	3.0	9.95	1.0	199 mm	20	Bright Finish
MB-2KA40-01	0.127	28.5	7.5	10.5	3.0	9.95	1.0	199 mm	20	Bright Finish

Notes:①MB-KA40-0N Nickel Plated;MB-KA40-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range 1.5-3.0mm, New P/N:MB-KA40D-01;③Can use 0.127mm made;

37. MB-NY40-01

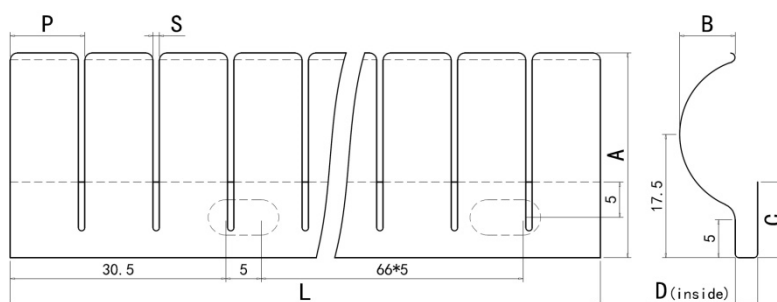



The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

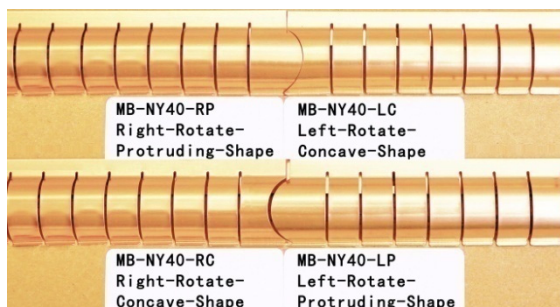


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-NY40-01	0.15	27.5	8.5	11.3	3.0	10.55	0.9	410 mm	39	Bright Finish
MB-2NY40-01	0.127	27.5	8.5	11.3	3.0	10.55	0.9	410 mm	39	Bright Finish

Notes:①MB-NY40-0N Nickel Plated;MB-NY40-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range 1.5-3.0mm, New P/N:MB-NY40D-01;③Can use 0.127mm made;

38. MB-NY35-01

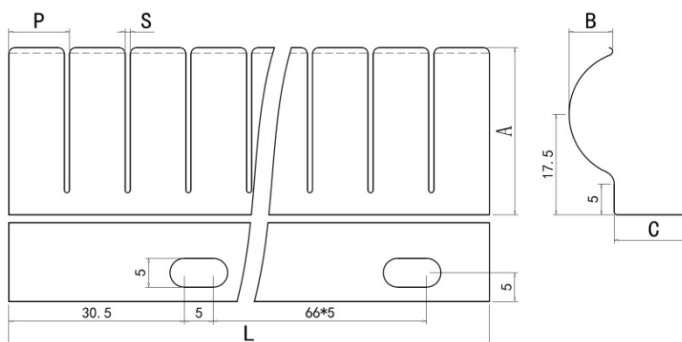



The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

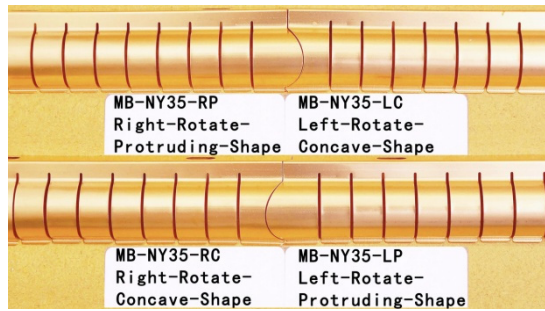

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-NY35-01	0.15	27.5	8.5	11.3	10.55	0.9	410 mm	39	Bright Finish
MB-2NY35-01	0.127	27.5	8.5	11.3	10.55	0.9	410 mm	39	Bright Finish

Notes:①MB-NY35-0N Nickel Plated;MB-NY35-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.127mm made;



39. MB-1375-01

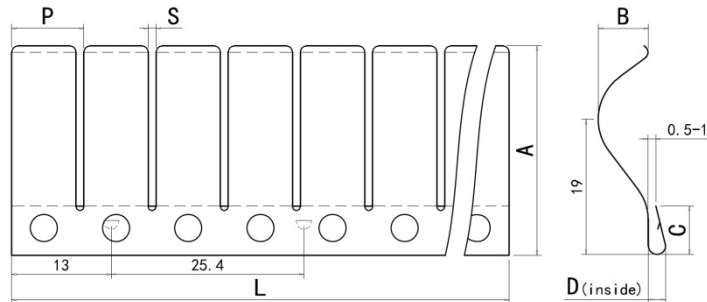

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1375-01	0.127	27	6.6	6.5	2.3	9.52	1.0	408 mm	43	Bright Finish

Notes:①MB-1375-0N Nickel Plated;MB-1375-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



40. MB-1123-01

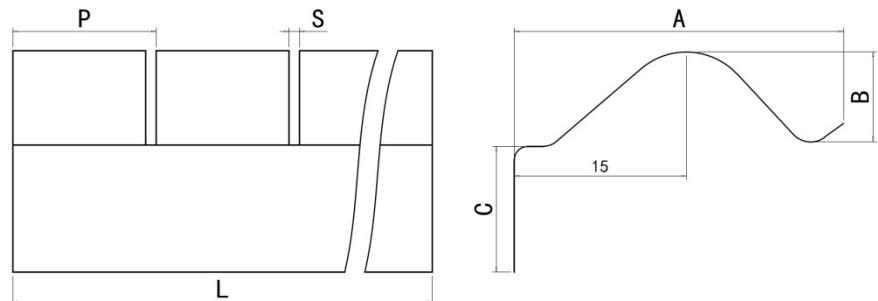


Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1123-01	0.1	22	6.5	9	10.1	0.8	150.7 mm	15	Bright Finish

Notes:①MB-1123-0N Nickel Plated;MB-1123-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;

41. MB-SS40-01

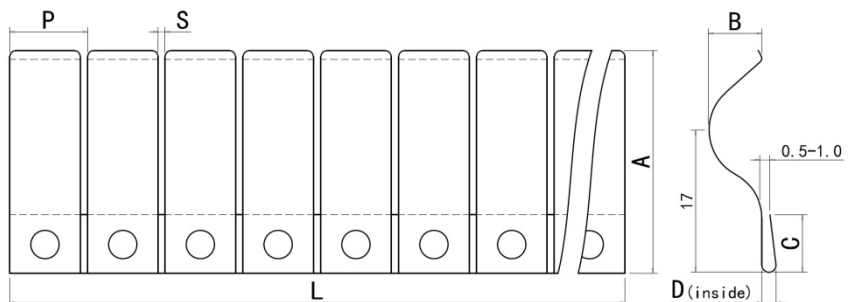


The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

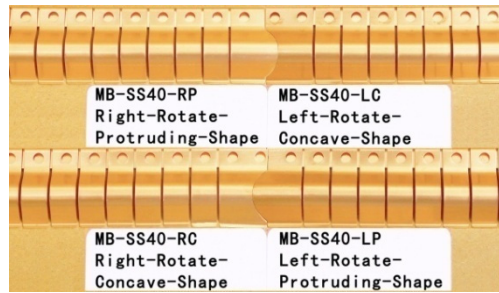


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-SS40-01	0.127	27.5	6.6	7.3	1.8	9.78	0.9	410 mm	42	Bright Finish

Notes:①MB-SS40-0N Nickel Plated;MB-SS40-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-SS40D-01;

42. MB-SS35-01

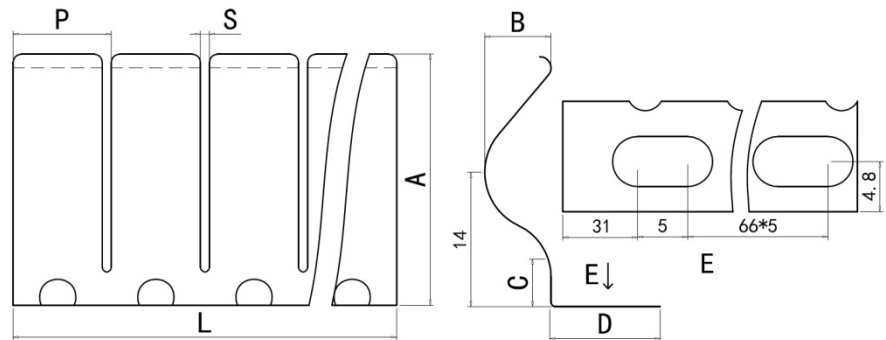


The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

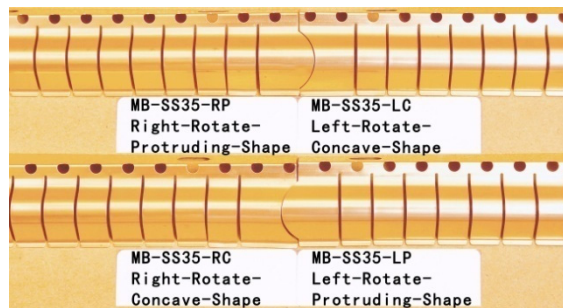


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-SS35-01	0.127	25	6.6	5.5	11.0	9.78	0.90	410 mm	42	Bright Finish

Notes:①MB-SS35-0N Nickel Plated;MB-SS35-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;

43. MB-HY40-01

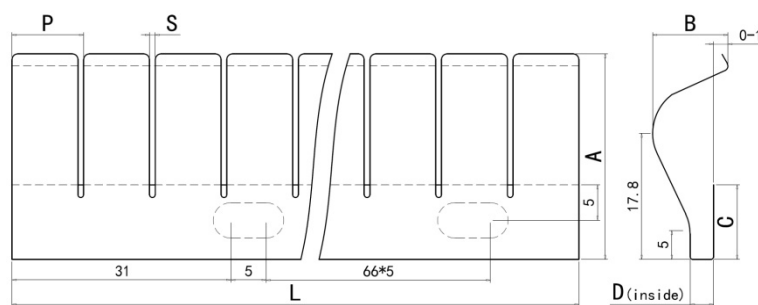



The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

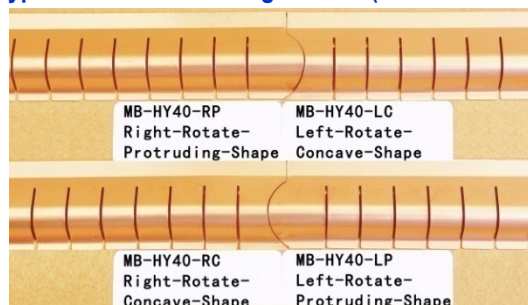


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-HY40-01	0.15	26.5	8	10.5	3.0	10.14	0.8	405 mm	40	Bright Finish
MB-2HY40-01	0.127	26.5	8	10.5	3.0	10.14	0.8	405 mm	40	Bright Finish

Notes:①MB-HY40-0N Nickel Plated;MB-HY40-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-HY40D-01;③Can use 0.127mm made;

44. MB-HY35-01

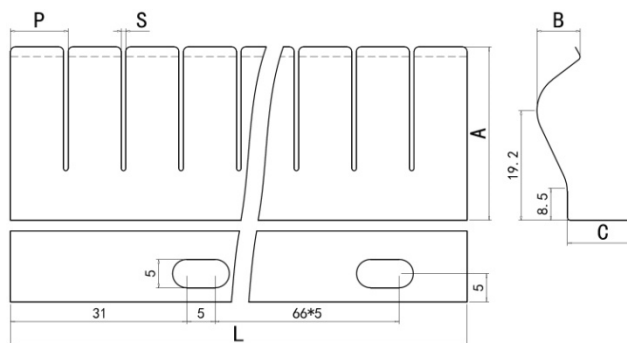



The Product Can Be Provided Two Types Corner Connecting Gaskets(Shown As Below)

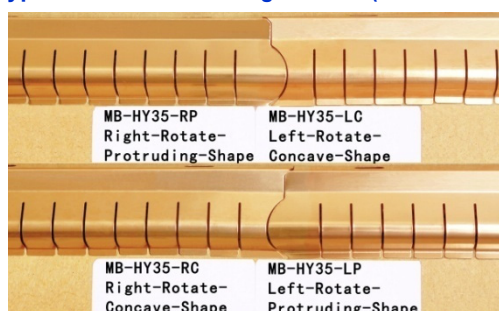

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-HY35-01	0.15	29.5	8.0	11.5	10.14	0.8	405 mm	40	Bright Finish
MB-2HY35-01	0.127	29.5	8.0	11.5	10.14	0.8	405 mm	40	Bright Finish

Notes:①MB-HY35-0N Nickel Plated;MB-HY35-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.127mm made;


45. MB-KR40-01

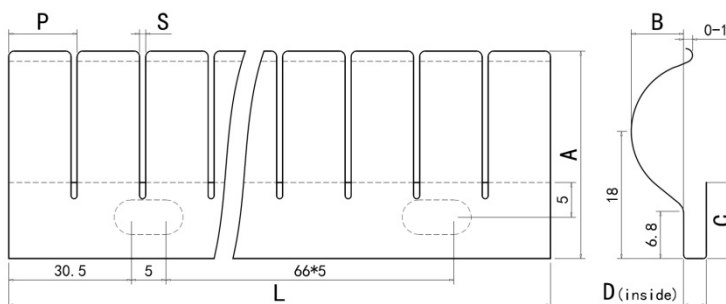

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-KR40-01	0.15	31	7.6	11	3.0	10	1	409 mm	41	Bright Finish
MB-2KR40-01	0.127	31	7.6	11	3.0	10	1	409 mm	41	Bright Finish

Notes:①MB-KR40-0N Nickel Plated;MB-KR40-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-KR40D-01;③Can use 0.127mm made;


46. MB-KR35-01

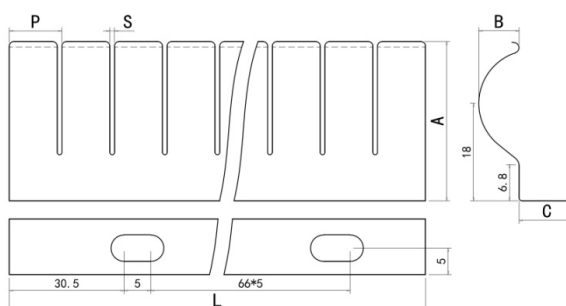

Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish
MB-KR35-01	0.15	30	7.6	10.5	10	1	409 mm	41	Bright Finish
MB-2KR35-01	0.127	30	7.6	10.5	10	1	409 mm	41	Bright Finish

Notes:①MB-KR35-0N Nickel Plated;MB-KR35-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.127mm made;


47. MB-1236-01

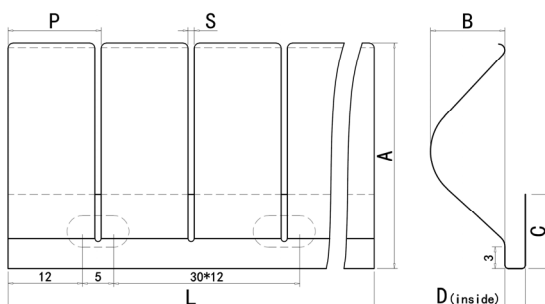

产品料号	T (mm)	A	B	C	D	P	S	L _{最长}	节数	外观
MB-1236-01	0.15	36.5	12.15	12	3.00	15	1.0	404 mm	27	本色
MB-2236-01	0.127	36.5	12.15	12	3.00	15	1.0	404 mm	27	

注:①MB-1236-0N光亮镀镍;MB-1236-0S光亮镀锡;表面也可镀金,银,锌等;② D可做到1.5-3.0mm之间,对应料号:MB-LD35D-01;③也可用0.1mm厚度生产;


48. MB-1237-01

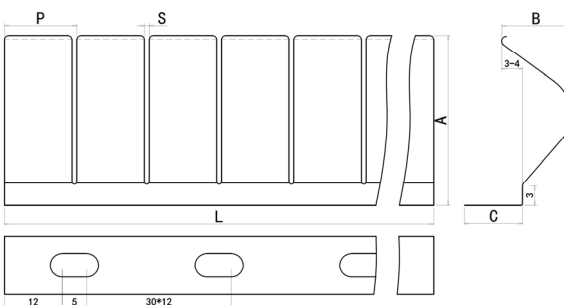

产品料号	T (mm)	A	B	C	P	S	L _{最长}	节数	外观
MB-1237-01	0.15	35.3	14.5	12	15	1	404 mm	27	本色
MB-2237-01	0.127	35.3	14.5	12	15	1	404 mm	27	

注:①MB-1237-0N光亮镀镍;MB-1237-0S光亮镀锡;表面也可镀金,银,锌等;②长度可切1节,2节...等长度;③也可用0.127mm厚度生产;


49. MB-TY48-01

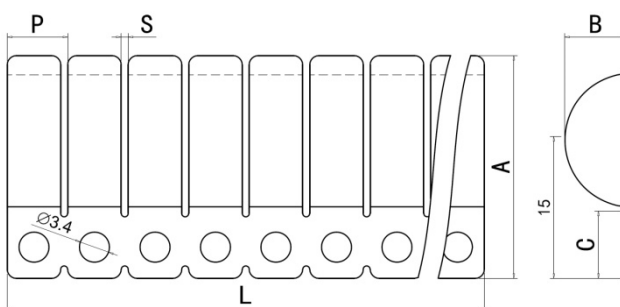

Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish
MB-TY48-01	0.15	25	7.2	8	6.8	1	611 mm	90	Bright Finish
MB-TY48C-01	0.15	25	7.2	8	6.8	1	7.62 M	1121	Bright Finish (coil)

Notes:①MB-TY48-0N Nickel Plated;MB-TY48-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


50. MB-TY38-01

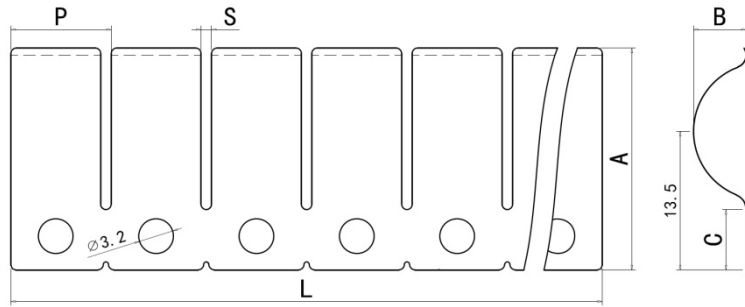

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-TY38-01	0.1	21	5.5	6.5	9.52	1	608 mm	64	Bright Finish
MB-TY38C-01	0.1	21	5.5	6.5	9.52	1	7.62 M	800	Bright Finish (coil)

Notes:①MB-TY38-0N Nickel Plated;MB-TY38-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1,2,...;



51. MB-TY35-01

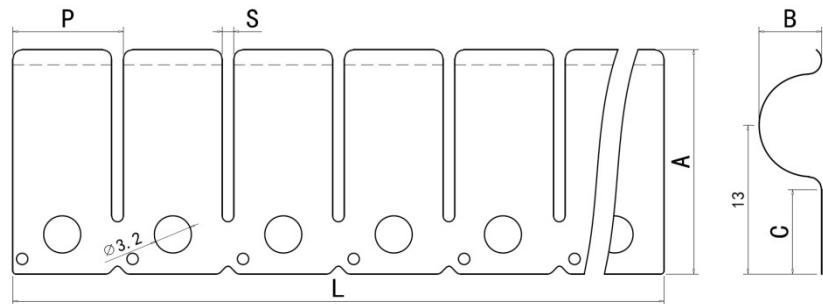

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-TY35-01	0.1	19	4.5	7.1	9.52	1	608 mm	64	Bright Finish
MB-TY35C-01	0.1	19	4.5	7.1	9.52	1	7.62 M	800	Bright Finish (coil)

Notes:①MB-TY35-0N Nickel Plated;MB-TY35-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1,2,...;



52. MB-1235-01

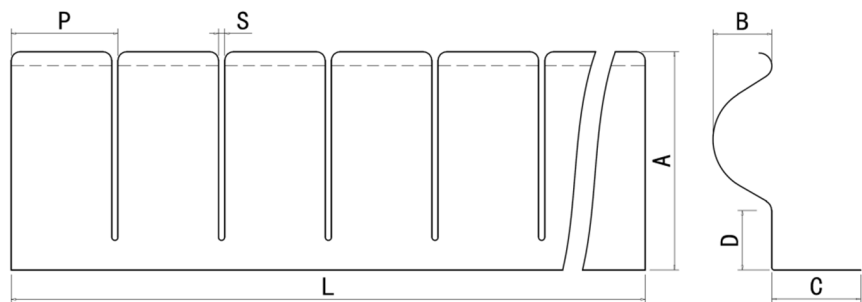

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1235-01	0.127	20.5	5.5	8.4	6.5	10	0.6	199.4 mm	20	Bright Finish

Notes:①MB-1235-0N Nickel Plated;MB-1235-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1,2,...;



53. MB-1240-01

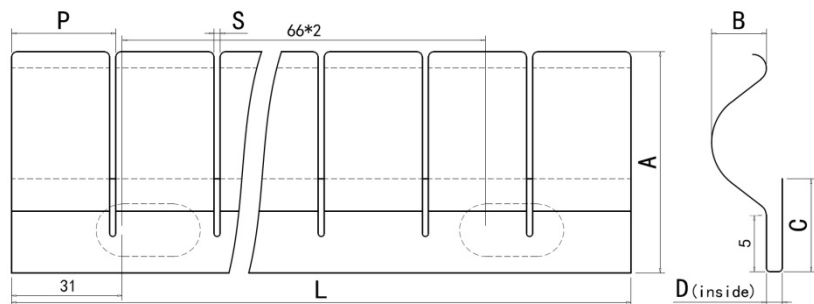

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1240-01	0.127	20.5	5.5	9	1.5	10	0.6	199.4 mm	20	Bright Finish

Notes:①MB-1240-0N Nickel Plated;MB-1240-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-1240D-01;



54. MB-1140-01

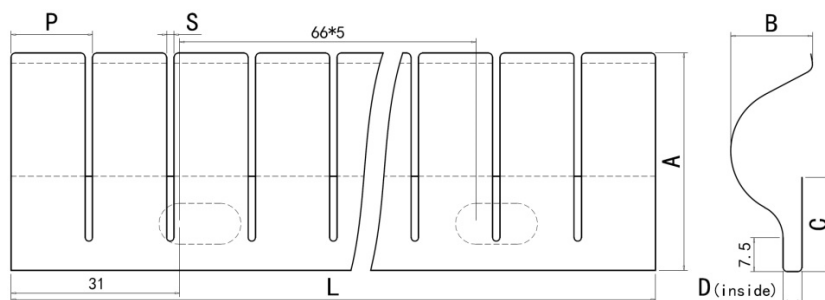

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1140-01	0.15	26.5	10	11.5	2.0	9.95	0.9	407 mm	41	Bright Finish

Notes:①MB-1140-0N Nickel Plated;MB-1140-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-1140D-01;

55. MB-1460-01

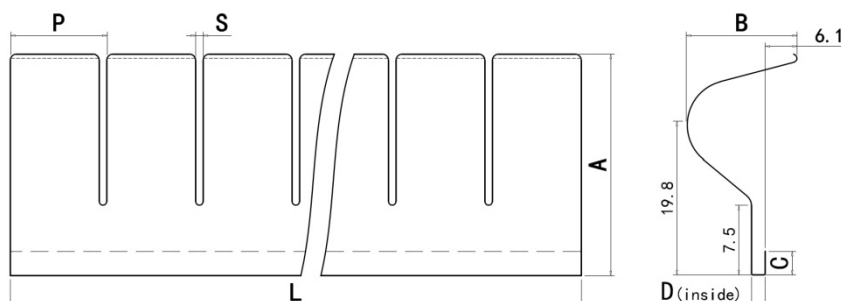



Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1460-01	0.1	29	14.6	3.2	2.0	12.7	1.0	405 mm	32	Bright Finish

Notes:①MB-1460-0N Nickel Plated;MB-1460-0S Tin Plated; Can Plate Silver &Zinc etc; ②Size D range1.5-3.0mm, New P/N:MB-1460D-01;

Three. single slot mount series (No.56 --- No.67; Total 12 Items)



56. MB-1116-01

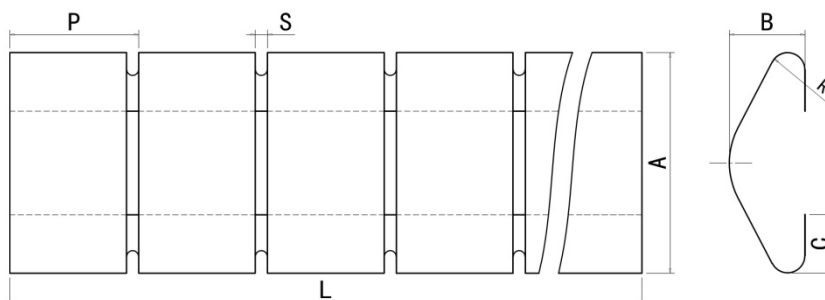

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1116-01	0.089	8.13	2.8	2.16	0.51	4.75	0.5	408 mm	86	Bright Finish

Notes:①MB-1116-0N Nickel Plated;MB-1116-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


57. MB-1216-01

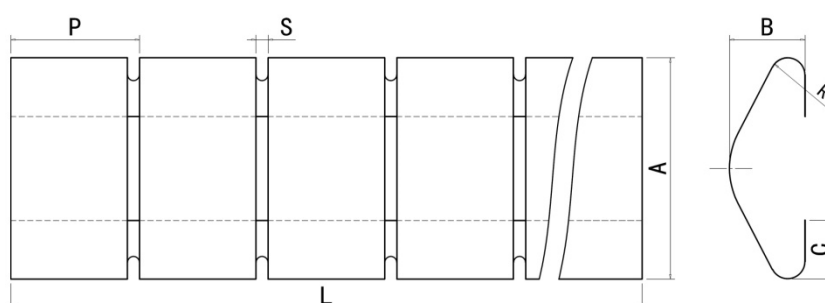

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1216-01	0.05	8.13	2.8	2.16	0.51	4.75	0.5	408 mm	86	Bright Finish

Notes:①MB-1216-0N Nickel Plated;MB-1216-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



58. MB-1077-01

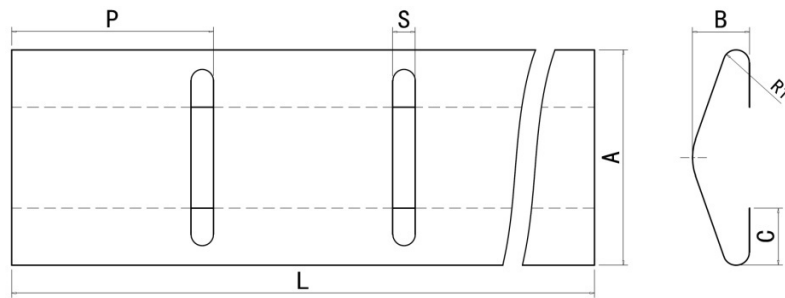

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1077-01	0.05	4.8	1.7	1.35	0.32	4.61	0.5	230 mm	50	Bright Finish (standard length)
MB-1077-01	0.05	4.8	1.7	1.35	0.32	4.61	0.5	405 mm	88	Bright Finish (length max)

Notes:①MB-1077-0N Nickel Plated;MB-1077-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


59. MB-1721-01

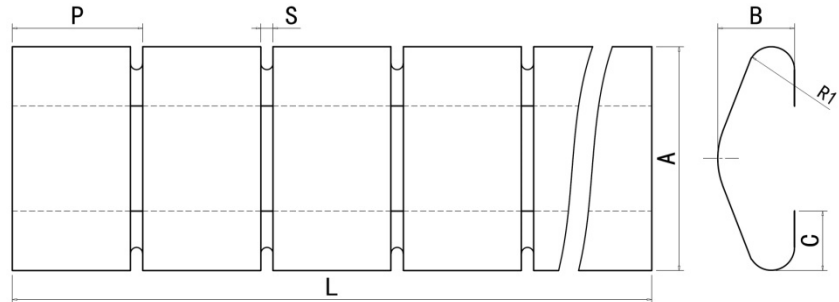

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1721-01	0.089	8.13	2.8	2.16	0.95	4.75	0.5	408 mm	86	Bright Finish
MB-2721-01	0.05	8.13	2.8	2.16	0.95	4.75	0.5	408 mm	86	Bright Finish

Notes:①MB-1721-0N Nickel Plated;MB-1721-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;



60. MB-1957-01

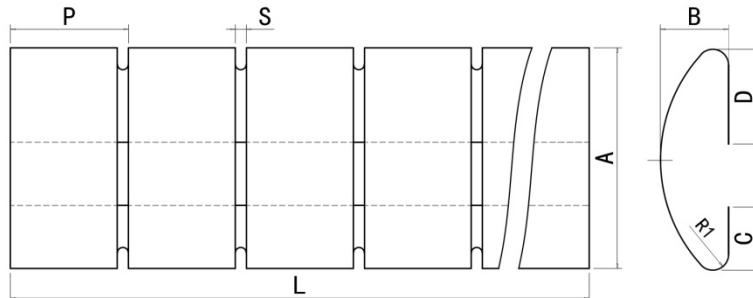

Part Number	T(mm)	A	B	C	D	R1	P	S	Lmax	Nodes	Finish
MB-1957-01	0.08	8.9	2.8	2.3	3.4	0.75	4.75	0.5	265.5 mm	56	Bright Finish
MB-2957-01	0.05	8.9	2.8	2.3	3.4	0.75	4.75	0.5	270 mm	57	Bright Finish

Notes:①MB-1957-0N Nickel Plated;MB-1957-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;


61. MB-1457-01

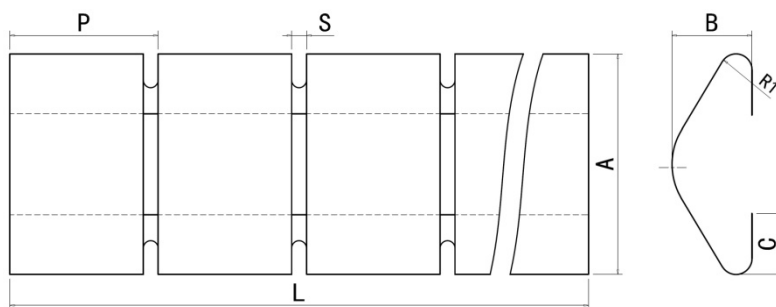

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1457-01	0.08	9.4	3.4	2.4	0.51	6.35	0.63	406 mm	64	Bright Finish
MB-2457-01	0.05	9.4	3.4	2.4	0.51	6.35	0.63	406 mm	64	Bright Finish

Notes:①MB-1457-0N Nickel Plated;MB-1457-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;



62. MB-1711-01

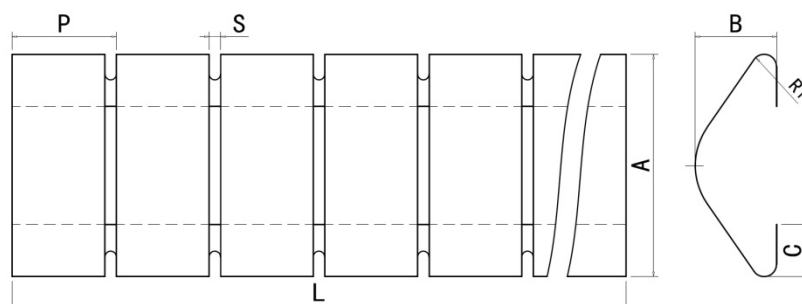

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1711-01	0.127	15.2	5.6	3.56	1.00	7.16	0.81	407 mm	57	Bright Finish
MB-2711-01	0.08	15.2	5.6	3.56	1.00	7.16	0.81	407 mm	57	Bright Finish
MB-3711-01	0.05	15.2	5.6	3.56	1.00	7.16	0.81	407 mm	57	Bright Finish

Notes:①MB-1711-0N Nickel Plated;MB-1711-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.08mm &0.05mm made;


63. MB-1533-01

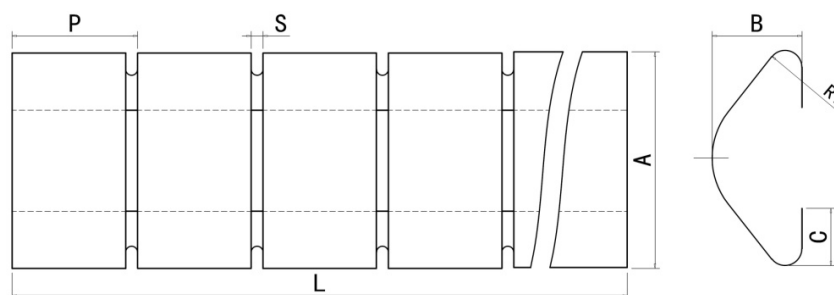

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1533-01	0.08	7.5	3.3	2.16	0.51	4.75	0.5	408 mm	86	Bright Finish
MB-2533-01	0.05	7.5	3.3	2.16	0.51	4.75	0.5	408 mm	86	Bright Finish

Notes:①MB-1533-0N Nickel Plated;MB-1533-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;



64. MB-1125-01

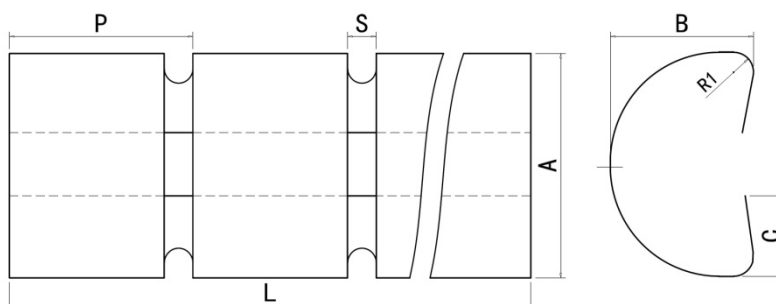

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1125-01	0.05	3.9	2.5	1.4	0.35	3.2	0.5	191.5 mm	60	Bright Finish

Notes:①MB-1125-0N Nickel Plated;MB-1125-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2....;



65. MB-1218-01

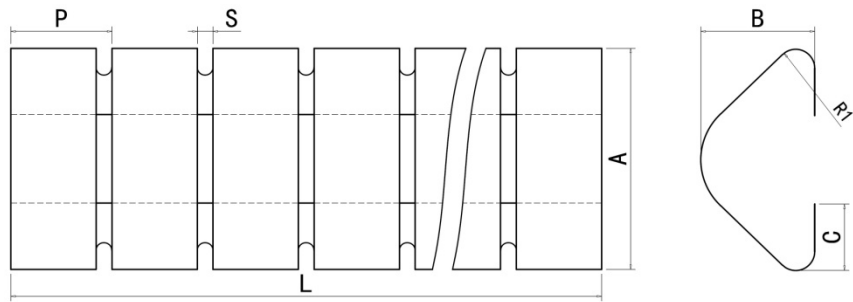

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1218-01	0.05	7.0	3.4	2.1	0.5	3.2	0.5	406 mm	127	Bright Finish

Notes:①MB-1218-0N Nickel Plated;MB-1218-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2....;


66. MB-1365-01

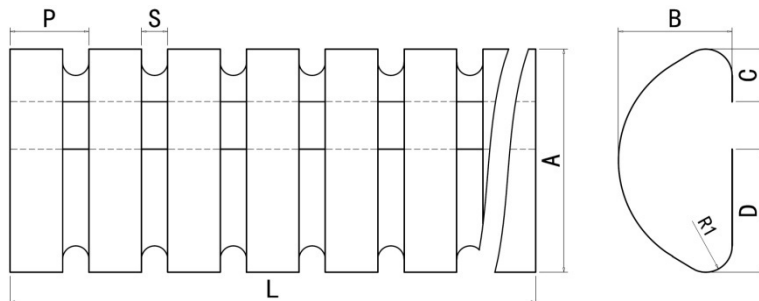

Part Number	T(mm)	A	B	C	D	R1	P	S	Lmax	Nodes	Finish
MB-1365-01	0.15	12.7	6.6	3	7	1.40	4.5	1.5	350 mm	78	Bright Finish

Notes:①MB-1365-0N Nickel Plated;MB-1365-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2....;

67. MB-1715-01

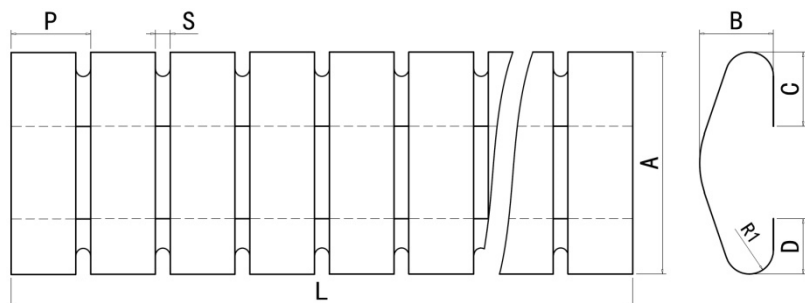


Part Number	T(mm)	A	B	C	D	R1	P	S	Lmax	Nodes	Finish
MB-1715-01	0.2	12	4	4	3	1.10	4.3	0.8	171 mm	40	Bright Finish

Notes:①MB-1365-0N Nickel Plated;MB-1365-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2....;

Four. Dual slots mount series (No.68---No.80, Total 13 Items)



68. MB-1756-01

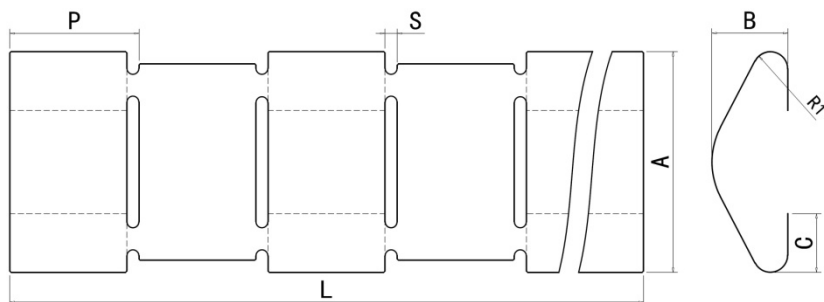

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1756-01	0.089	8.13	2.8	2.16	0.51	4.75	0.50	413 mm	87	Bright Finish
MB-1756-0N	0.089	8.13	2.8	2.16	0.51	4.75	0.50	413 mm	87	Nickel Plated
MB-1756-0S	0.089	8.13	2.8	2.16	0.51	4.75	0.50	413 mm	87	Tin Plated
MB-2756-01	0.05	8.13	2.8	2.16	0.51	4.75	0.50	413 mm	87	Bright Finish (Standard Length)
MB-2756-01	0.05	8.13	2.8	2.16	0.51	4.75	0.50	612 mm	129	Bright Finish (Max Length)

Notes:①MB-2756-0N Nickel Plated;MB-2756-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



69. MB-1061-01

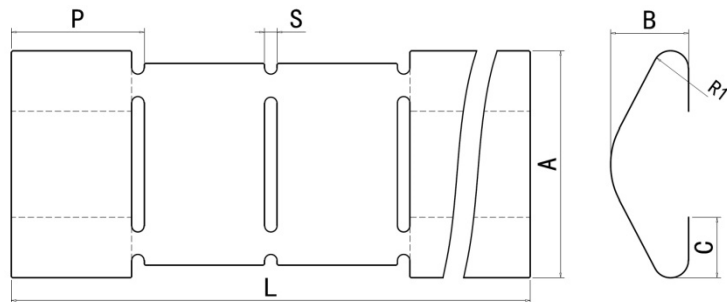

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1061-01	0.089	8.13	2.8	2.16	0.51	4.75	0.50	417.5 mm	88	Bright Finish
MB-1061-0N	0.089	8.13	2.8	2.16	0.51	4.75	0.50	417.5 mm	88	Nickel Plated
MB-1061-0S	0.089	8.13	2.8	2.16	0.51	4.75	0.50	417.5 mm	88	Tin Plated
MB-2061-01	0.05	8.13	2.8	2.16	0.51	4.75	0.50	417.5 mm	88	Bright Finish

Notes:①MB-2061-0N Nickel Plated;MB-2061-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;



70. MB-1757-01

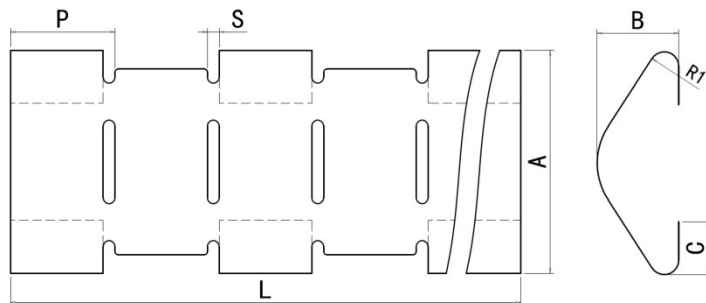

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1757-01	0.127	15.2	5.6	3.6	1.0	7.16	0.81	407 mm	57	Bright Finish

Notes:①MB-1757-0N Nickel Plated;MB-1757-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;


71. MB-1449-01

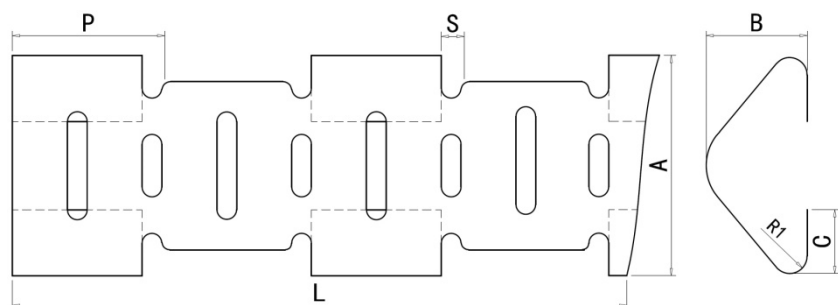

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1449-01	0.05	5	2.3	1.4	0.4	3.4	0.45	418 mm	123	Bright Finish

Notes:①MB-1449-0N Nickel Plated;MB-1449-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



72. MB-1109-01

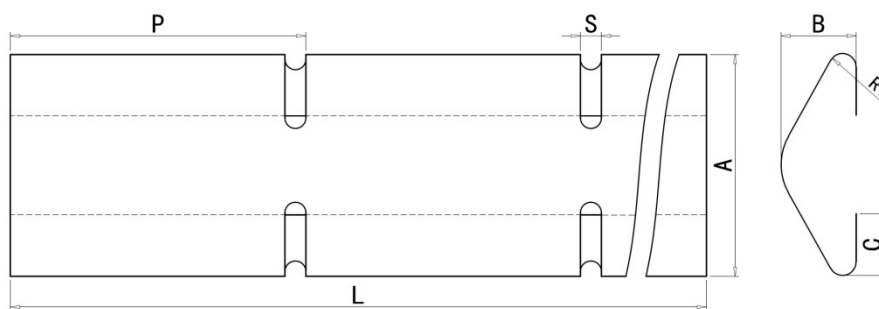

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1109-01	0.05	4.85	1.8	1.4	0.32	6.48	0.51	233 mm	36	Bright Finish

Notes:①MB-1109-0N Nickel Plated;MB-1109-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



73. MB-1136-01

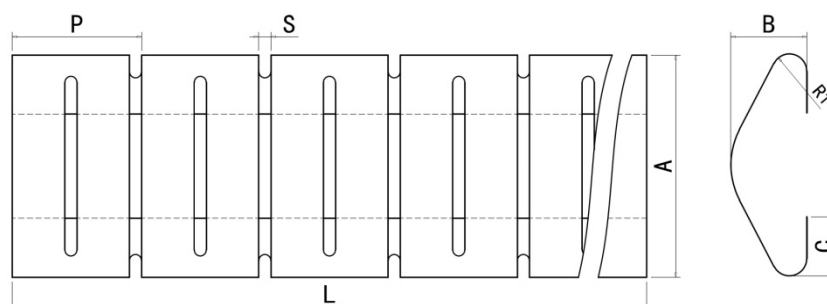

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1136-01	0.089	8.13	2.8	2.16	0.51	4.75	0.50	408 mm	86	Bright Finish
MB-2136-01	0.05	8.13	2.8	2.16	0.51	4.75	0.50	408 mm	86	Bright Finish

Notes:①MB-2136-0N Nickel Plated;MB-2136-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.089mm made;



74. MB-1793-01

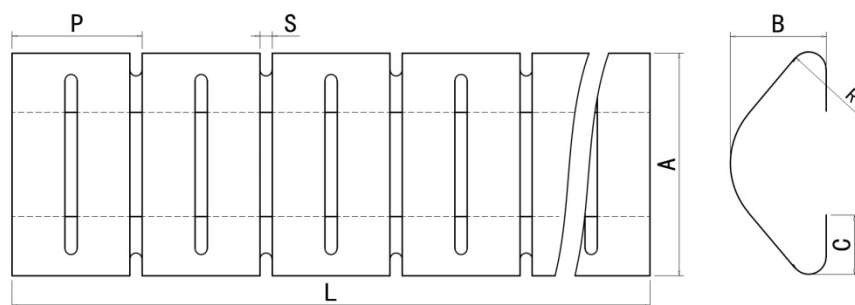

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1793-01	0.089	8.25	3.5	2.16	0.51	4.75	0.50	408 mm	86	Bright Finish
MB-2793-01	0.05	8.25	3.5	2.16	0.51	4.75	0.50	408 mm	86	Bright Finish

Notes:①MB-1793-0N Nickel Plated;MB-1793-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;



75. MB-1524-01

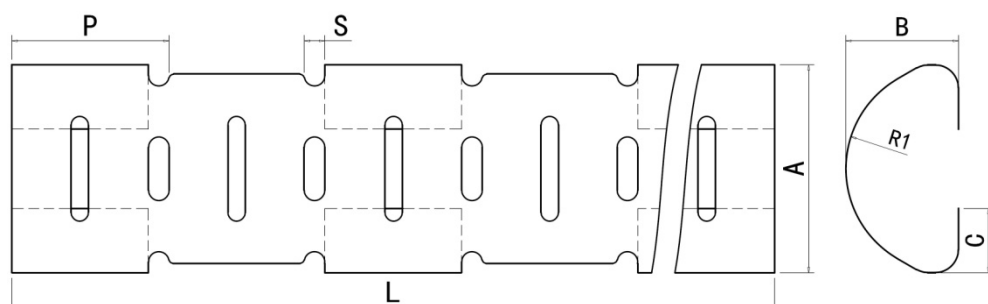

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1524-01	0.05	4.5	2.4	1.4	2.25	3.4	0.45	98.2 mm	29	Bright Finish

Notes:①MB-1524-0N Nickel Plated;MB-1524-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



76. MB-1798-01

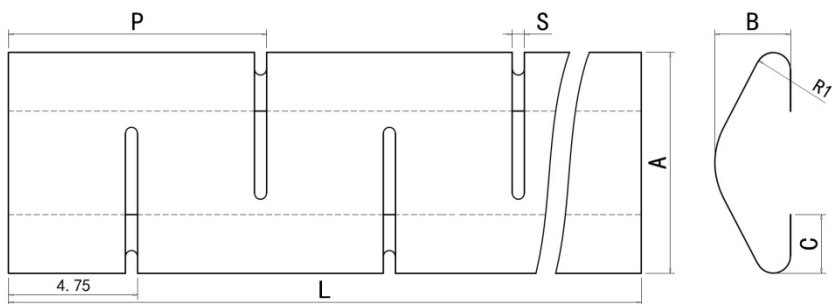

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1798-01	0.089	8.13	2.8	2.16	0.51	4.75	0.50	408 mm	86	Bright Finish
MB-2798-01	0.05	8.13	2.8	2.16	0.51	4.75	0.50	408 mm	86	Bright Finish

Notes:①MB-2798-0N Nickel Plated;MB-2798-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.089mm made;


77. MB-1256-01

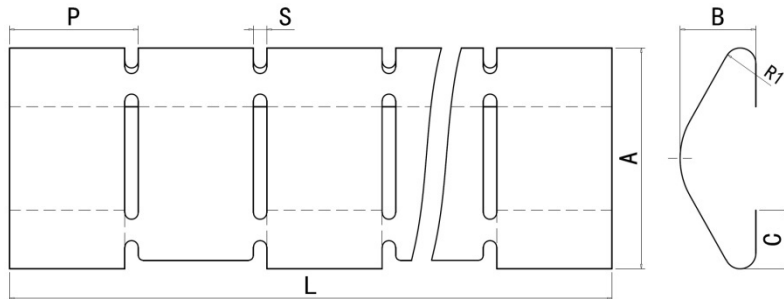

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1256-01	0.089	8.13	2.8	2.16	0.51	4.75	0.50	413 mm	87	Bright Finish
MB-2256-01	0.05	8.13	2.8	2.16	0.51	4.75	0.50	413 mm	87	Bright Finish

Notes:①MB-2256-0N Nickel Plated;MB-2256-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.089mm made;


78. MB-1956-01

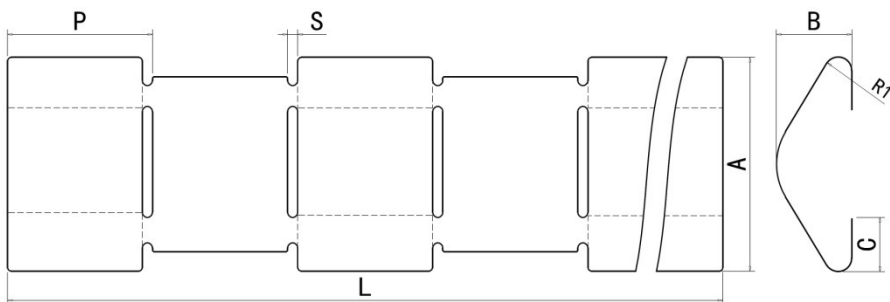

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1956-01	0.08	9.4	3.4	2.4	0.51	6.35	0.63	412 mm	65	Bright Finish
MB-2956-01	0.05	9.4	3.4	2.4	0.51	6.35	0.63	412 mm	65	Bright Finish

Notes:①MB-1956-0N Nickel Plated;MB-1956-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;



79. MB-1456-01

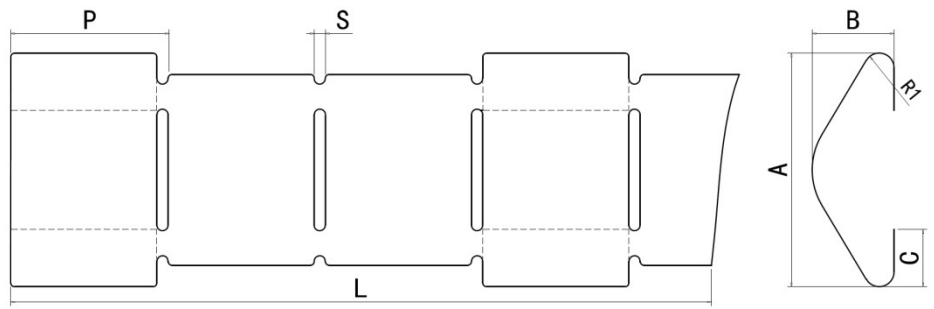

Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1456-01	0.08	9.4	3.4	2.4	0.51	6.35	0.63	406 mm	64	Bright Finish
MB-2456-01	0.05	9.4	3.4	2.4	0.51	6.35	0.63	406 mm	64	Bright Finish

Notes:①MB-1456-0N Nickel Plated;MB-1456-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;

80. MB-1661-01

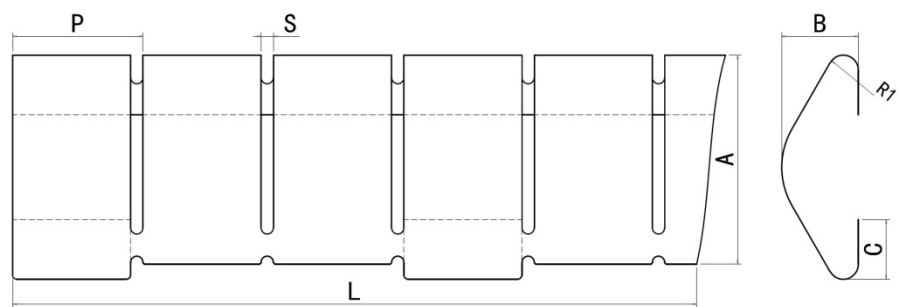


Part Number	T(mm)	A	B	C	R1	P	S	Lmax	Nodes	Finish
MB-1661-01	0.089	8.13	2.8	2.16	0.51	4.75	0.45	417.5 mm	88	Bright Finish
MB-2661-01	0.05	8.13	2.8	2.16	0.51	4.75	0.45	417.5 mm	88	Bright Finish

Notes:①MB-1661-0N Nickel Plated;MB-1661-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;③Can use 0.05mm made;

Five. Twist series(No.81--- No.91, Total 11 Items)



81. MB-1550-01

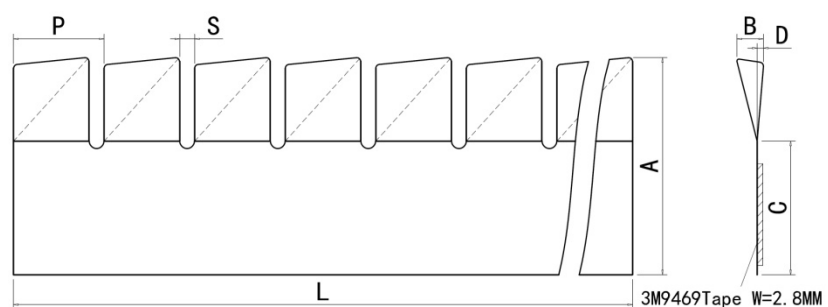

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1550-01	0.08	5.9	0.8	3.5	0.15	2.42	0.4	609 mm	252	Bright Finish
MB-1550-0N	0.08	5.9	0.8	3.5	0.15	2.42	0.4	609 mm	252	Nickel Plated
MB-1550-0S	0.08	5.9	0.8	3.5	0.15	2.42	0.4	609 mm	252	Tin Plated
MB-1550C-01	0.08	5.9	0.8	3.5	0.15	2.42	0.4	7.62 M	3148	Bright Finish (Coil)
MB-2550-01	0.05	5.9	0.8	3.5	0.15	2.42	0.4	609 mm	252	Bright Finish

Notes:①MB-2550-0N Nickel Plated;MB-2550-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;

82. MB-1551-01

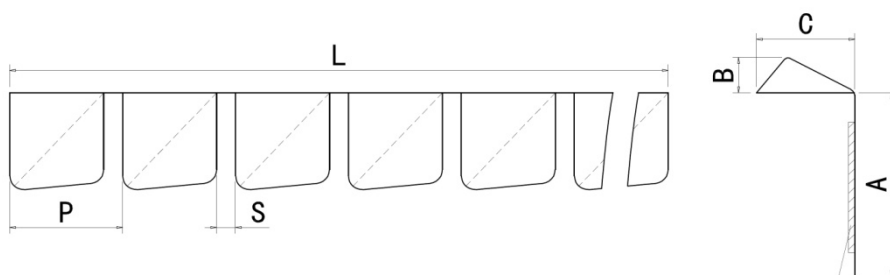


3M9469Tape W=2.8MM

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1551-01	0.08	4	0.8	2.1	2.42	0.4	609 mm	252	Bright Finish
MB-1551C-01	0.08	4	0.8	2.1	2.42	0.4	7.62 M	3148	Bright Finish (Coil)
MB-2551-01	0.05	4	0.8	2.1	2.42	0.4	609 mm	252	Bright Finish

Notes:①MB-1551-0N Nickel Plated;MB-1551-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;

83. MB-1555-01

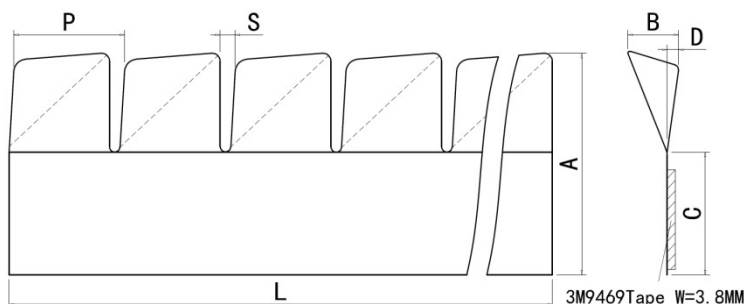


3M9469Tape W=3.8MM

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1555-01	0.08	8.64	1.90	4.58	0.3	4.2	0.4	609 mm	145	Bright Finish
MB-1555C-01	0.08	8.64	1.90	4.58	0.3	4.2	0.4	7.62 M	1815	Bright Finish (Coil)
MB-2555-01	0.05	8.64	1.90	4.58	0.3	4.2	0.4	609 mm	145	Bright Finish

Notes:①MB-1555-0N Nickel Plated;MB-1555-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;

84. MB-1560-01

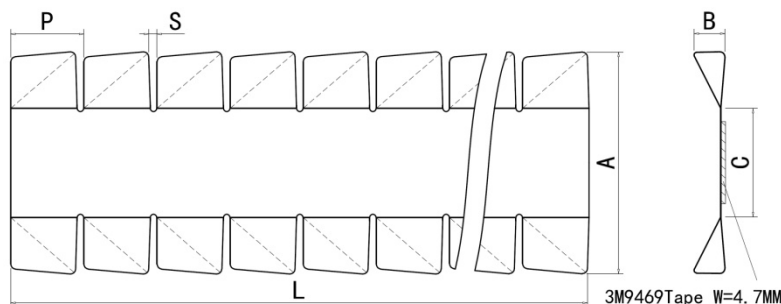


3M9469Tape W=4.7MM

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1560-01	0.08	12.7	1.75	5.5	4.2	0.4	609 mm	145	Bright Finish
MB-1560C-01	0.08	12.7	1.75	5.5	4.2	0.4	7.62 M	1815	Bright Finish (Coil)
MB-2560-01	0.05	12.7	1.75	5.5	4.2	0.4	609 mm	145	Bright Finish

Notes:①MB-1560-0N Nickel Plated;MB-1560-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;

85. MB-1558-01


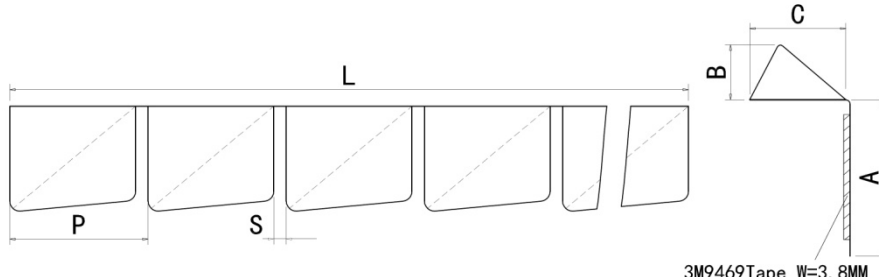


3M9469Tape W=3.8MM

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1558-01	0.08	5.0	1.75	2.87	4.2	0.4	609 mm	145	Bright Finish
MB-1558C-01	0.08	5.0	1.75	2.87	4.2	0.4	7.62 M	1815	Bright Finish (Coil)
MB-2558-01	0.05	5.0	1.75	2.87	4.2	0.4	609 mm	145	Bright Finish

Notes:①MB-1558-0N Nickel Plated;MB-1558-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;

86. MS-1551-01

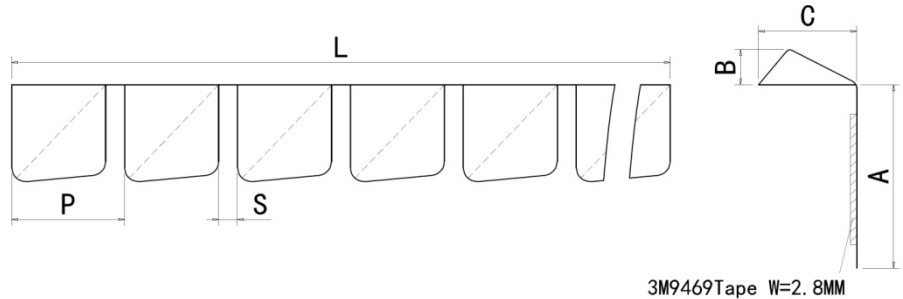



Notes: Raw Material: Stainless Steel From Japan SUS301-1/2H. T=0.08MM.

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MS-1551-01	0.08	4	0.8	2.1	2.42	0.4	610 mm	252	Bright Finish
MS-1551C-01	0.08	4	0.8	2.1	2.42	0.4	7.62 M	3148	Bright Finish (Coil)

Notes:① Can cut into X nodes,X=1.2...;



87. MB-1559-01

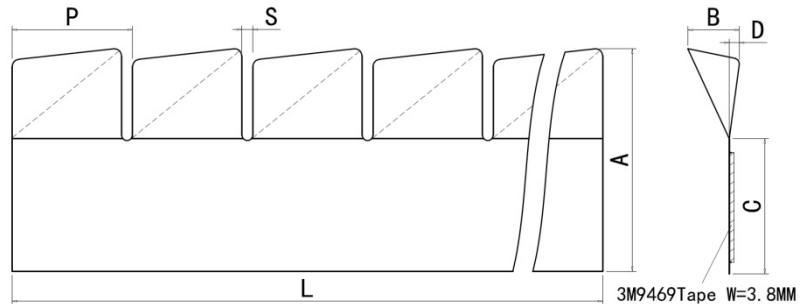

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1559-01	0.08	7.75	1.75	4.5	0.3	4.2	0.4	609 mm	145	Bright Finish
MB-1559C-01	0.08	7.75	1.75	4.5	0.3	4.2	0.4	7.62 M	1815	Bright Finish (Coil)
MB-2559-01	0.05	7.75	1.75	4.5	0.3	4.2	0.4	609 mm	145	Bright Finish

Notes:①MB-1559-0N Nickel Plated;MB-1559-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



88. MB-1556-01

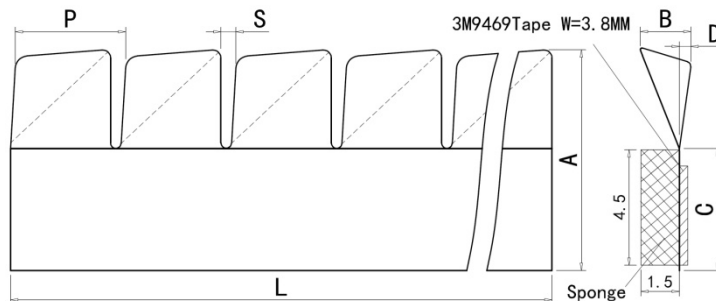

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1556-01	0.08	8.64	1.90	4.58	0.3	4.2	0.4	609 mm	145	Bright Finish
MB-1556C-01	0.08	8.64	1.90	4.58	0.3	4.2	0.4	7.62 M	1815	Bright Finish (Coil)

Note: MB-1556-01 is assembled from MB-1555-01+Sponge+3M9469 tape.



89. MB-1114-01

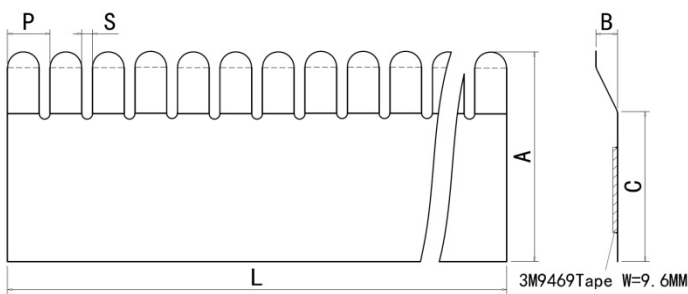

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1114-01	0.127	23.4	2.5	16.6	4.75	1.2	612 mm	129	Bright Finish

Notes:①MB-1114-0N Nickel Plated;MB-1114-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;



90. MB-1552-01

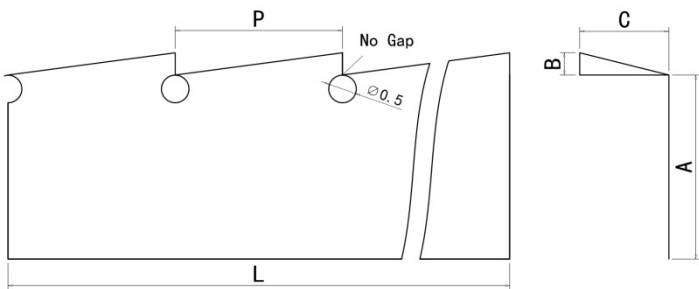

Part Number	T(mm)	A	B	C	P	Lmax	Nodes	Finish
MB-1552-01	0.1	3.3	0.4	1.6	3.0	609 mm	203	Bright Finish

Notes:①MB-1552-0N Nickel Plated;MB-1552-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;

91. MB-1250-01

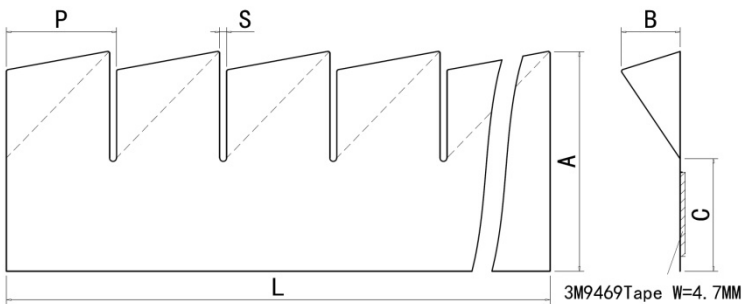



Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1250-01	0.08	12.7	3.5	5.7	6.35	0.4	609 mm	96	Bright Finish

Notes:①MB-1250-0N Nickel Plated;MB-1250-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ②Can cut into X nodes,X=1.2...;

Six. No Snag Gasket (No.92 --- No.115, Total 24 Items)



92. MB-1012-01

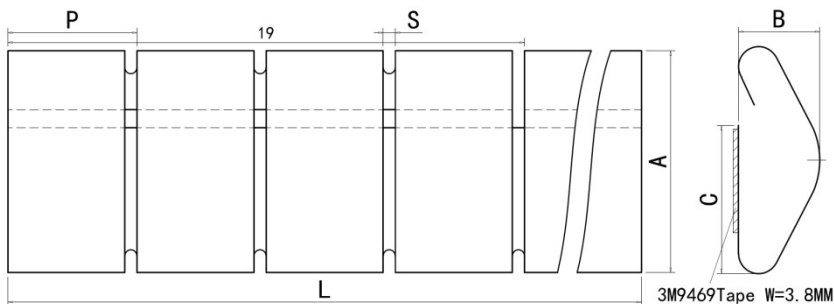

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1012-01	0.0635	8.13	2.8	5.3	4.75	0.45	612 mm	129	Bright Finish
MB-1012C-01	0.0635	8.13	2.8	5.3	4.75	0.45	7.62 M	1605	Bright Finish (Coil)
MB-2012-01	0.05	8.13	2.8	5.3	4.75	0.45	612 mm	129	Bright Finish

Notes:①MB-1012-0N Nickel Plated;MB-1012-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



93. MB-1013-01

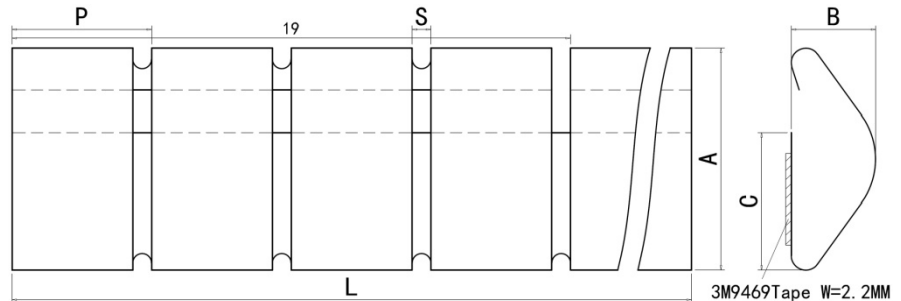

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1013-01	0.0635	5.0	2.0	3.3	4.75	0.45	612 mm	129	Bright Finish
MB-1013C-01	0.0635	5.0	2.0	3.3	4.75	0.45	7.62 M	1605	Bright Finish (Coil)
MB-2013-01	0.05	5.0	2.0	3.3	4.75	0.45	612 mm	129	Bright Finish

Notes:①MB-1013-0N Nickel Plated;MB-1013-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;


94. MB-1084-01

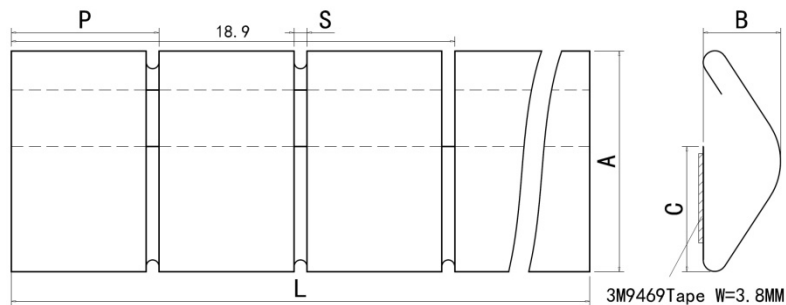

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1084-01	0.08	9.4	3.3	5.3	6.3	0.6	610 mm	97	Bright Finish
MB-1084C-01	0.08	9.4	3.3	5.3	6.3	0.6	7.62 M	1210	Bright Finish (Coil)

Notes:①MB-1084-0N Nickel Plated;MB-1084-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


95. MB-1014-01

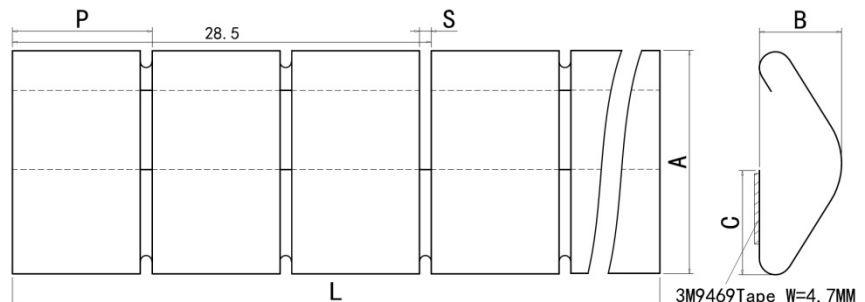

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1014-01	0.089	15.2	5.6	7.1	9.52	0.81	609 mm	64	Bright Finish
MB-1014C-01	0.089	15.2	5.6	7.1	9.52	0.81	7.62 M	800	Bright Finish (Coil)

Notes:①MB-1014-0N Nickel Plated;MB-1014-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


96. MB-1078-01

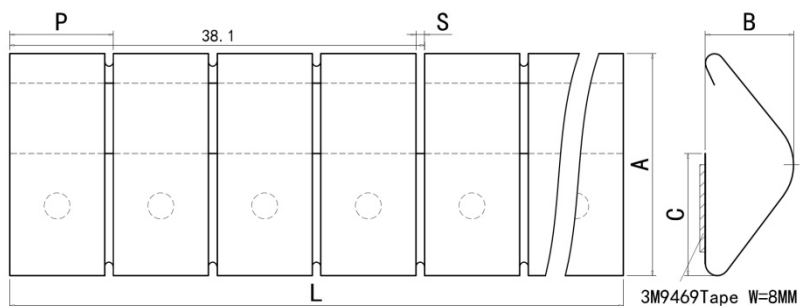

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1078-01	0.1	20.3	8.1	11.2	9.52	0.81	609 mm	64	Bright Finish
MB-1078C-01	0.1	20.3	8.1	11.2	9.52	0.81	7.62 M	800	Bright Finish (Coil)

Notes:①MB-1078-0N Nickel Plated;MB-1078-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



97. MB-1782-01

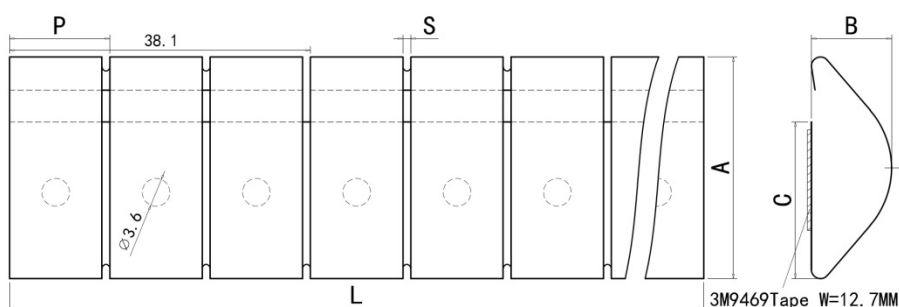

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1782-01	0.127	28.0	10.1	19.5	12.7	1	609 mm	48	Bright Finish
MB-1782C-01	0.127	28.0	10.1	19.5	12.7	1	7.62 M	600	Bright Finish (Coil)

Notes:①MB-1782-0N Nickel Plated;MB-1782-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


98. MB-1781-01

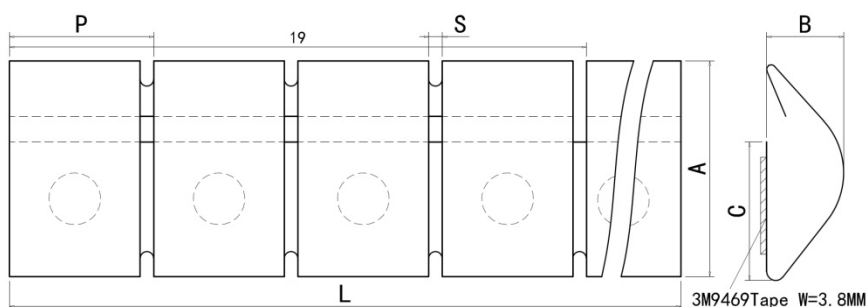

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1781-01	0.05	7.1	2.7	4.6	4.75	0.45	612 mm	129	Bright Finish
MB-1781C-01	0.05	7.1	2.7	4.6	4.75	0.45	7.62 M	1605	Bright Finish (Coil)

Notes:①MB-1781-0N Nickel Plated;MB-1781-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


99. MB-1527-01

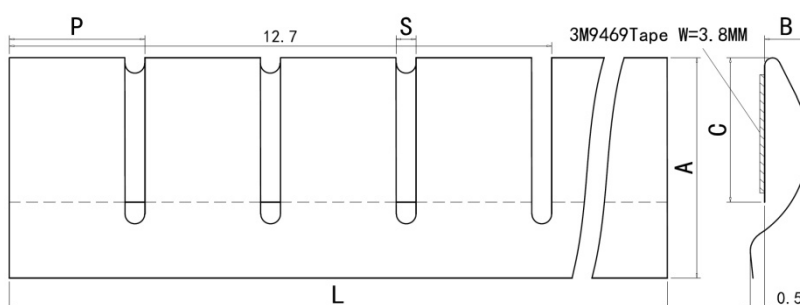

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1527-01	0.05	7.1	1.5	4.7	3.18	0.64	406 mm	128	Bright Finish

Notes:①MB-1527-0N Nickel Plated;MB-1527-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



100. MB-1079-01

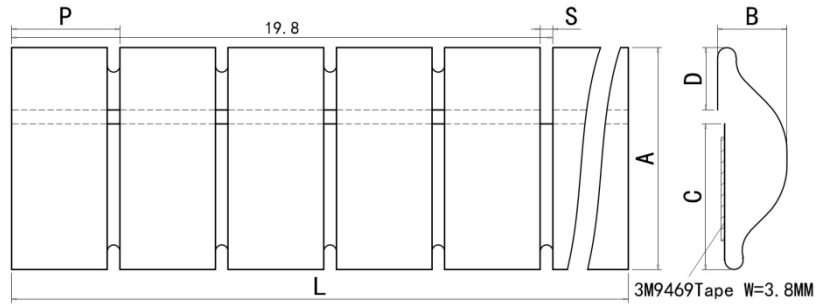

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1079-01	0.089	8.13	2.54	5.34	2.3	3.96	0.46	407 mm	103	Bright Finish
MB-1079C-01	0.089	8.13	2.54	5.34	2.3	3.96	0.46	7.62 M	1925	Bright Finish (Coil)

Notes:①MB-1079-0N Nickel Plated;MB-1079-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



101. MB-1304-01

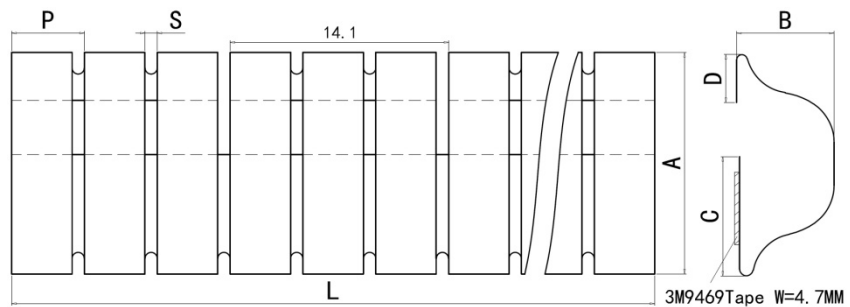

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1304-01	0.1	14.3	6.1	7.7	3.1	4.7	0.76	610 mm	130	Bright Finish
MB-1304C-01	0.1	14.3	6.1	7.7	3.1	4.7	0.76	7.62 M	1622	Bright Finish (Coil)

Notes:①MB-1304-0N Nickel Plated;MB-1304-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



102. MB-1791-01

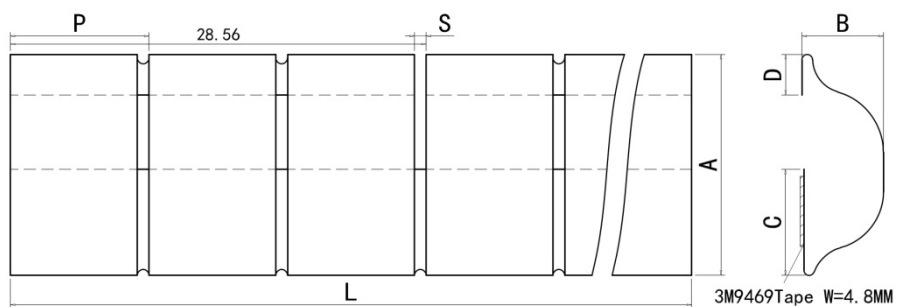

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1791-01	0.089	15.2	5.6	7.3	2.8	9.52	0.81	608.5 mm	64	Bright Finish
MB-1791C-01	0.089	15.2	5.6	7.3	2.8	9.52	0.81	7.62 M	800	Bright Finish (Coil)

Notes:①MB-1791-0N Nickel Plated;MB-1791-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



103. MB-1540-01

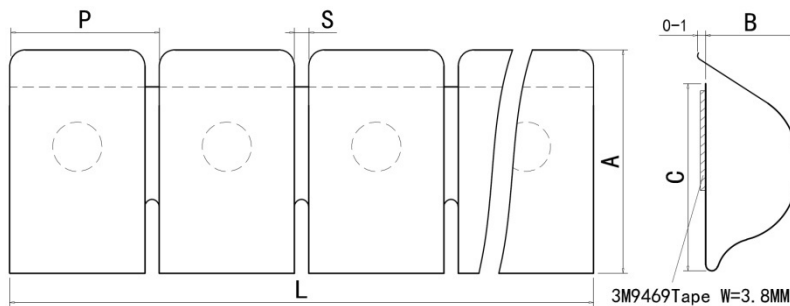

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1540-01	0.08	7.1	2.8	5.9	4.78	0.45	406 mm	85	Bright Finish
MB-1540C-01	0.08	7.1	2.8	5.9	4.78	0.45	7.62 M	1595	Bright Finish (Coil)
MB-2540-01	0.05	7.1	2.8	5.9	4.78	0.45	406 mm	85	Bright Finish

Notes:①MB-1540-0N Nickel Plated;MB-1540-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



104. MB-1541-01

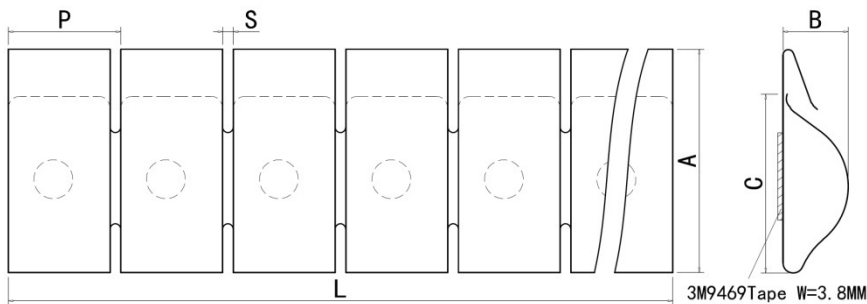

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1541-01	0.08	9.52	2.8	7.2	4.78	0.45	406 mm	85	Bright Finish
MB-1541C-01	0.08	9.52	2.8	7.2	4.78	0.45	7.62 M	1595	Bright Finish (Coil)
MB-2541-01	0.05	9.52	2.8	7.2	4.78	0.45	406 mm	85	Bright Finish

Notes:①MB-1541-0N Nickel Plated;MB-1541-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



105. MB-1542-01

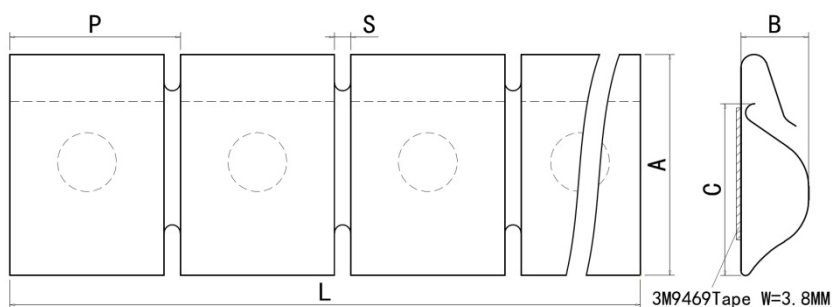

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1542-01	0.0635	6.2	2.03	4.7	4.78	0.45	406 mm	85	Bright Finish
MB-1542C-01	0.0635	6.2	2.03	4.7	4.78	0.45	7.62 M	1595	Bright Finish (Coil)
MB-2542-01	0.05	9.5	2.80	7.2	4.78	0.45	406 mm	85	Bright Finish

Notes:①MB-1542-0N Nickel Plated;MB-1542-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;


106. MB-1520-01

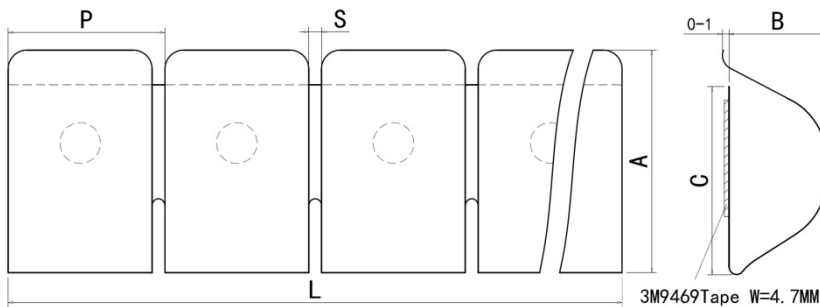

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1520-01	0.08	8.9	3.80	7.6	6.35	0.56	406 mm	64	Bright Finish
MB-1520C-01	0.08	8.9	3.80	7.6	6.35	0.56	7.62 M	1200	Bright Finish (Coil)
MB-2520-01	0.05	8.9	3.80	7.6	6.35	0.56	406 mm	64	Bright Finish

Notes:①MB-1520-0N Nickel Plated;MB-1520-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;


107. MB-1521-01

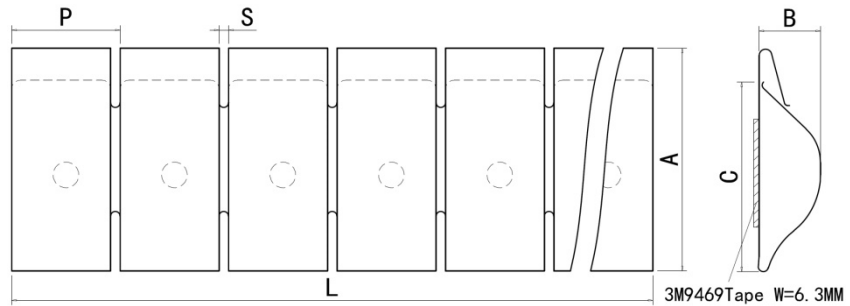

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1521-01	0.08	13.0	3.56	9.3	6.35	0.56	406 mm	64	Bright Finish
MB-1521C-01	0.08	13.0	3.56	9.3	6.35	0.56	7.62 米	1200	Bright Finish (Coil)
MB-2521-01	0.05	13.0	3.56	9.3	6.35	0.56	406 mm	64	Bright Finish

Notes:①MB-1521-0N Nickel Plated;MB-1521-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;


108. MB-1500-01

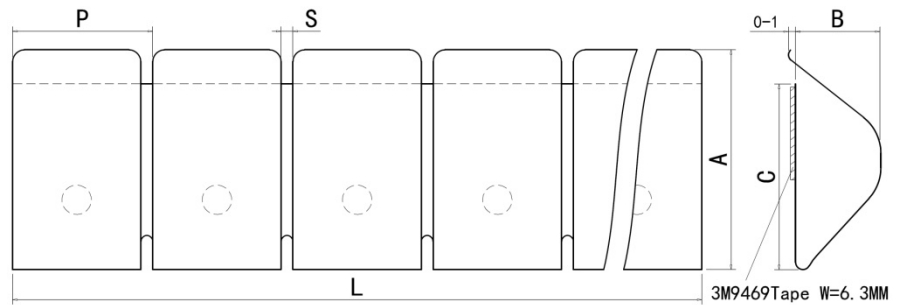

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1500-01	0.1	15.1	5.8	12.7	9.52	0.82	609 mm	64	Bright Finish
MB-1500C-01	0.1	15.1	5.8	12.7	9.52	0.82	7.62 M	800	Bright Finish (Coil)

Notes:①MB-1500-0N Nickel Plated;MB-1500-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


109. MB-1185-01

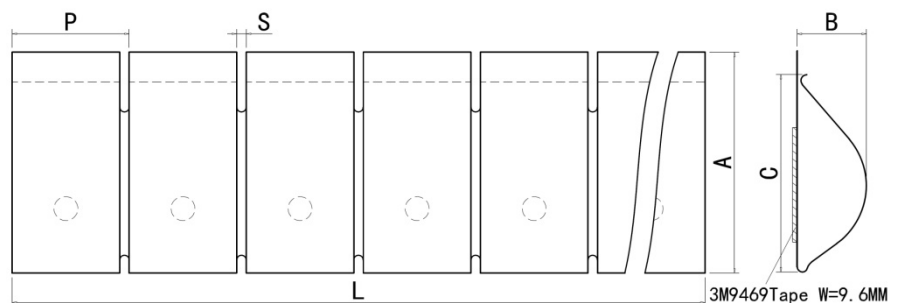

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1185-01	0.08	18.3	5.9	16.5	9.78	0.8	615 mm	63	Bright Finish
MB-1185C-01	0.08	18.3	5.9	16.5	9.78	0.8	7.62 M	778	Bright Finish (Coil)

Notes:①MB-1185-0N Nickel Plated;MB-1185-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


110. MB-1538-01

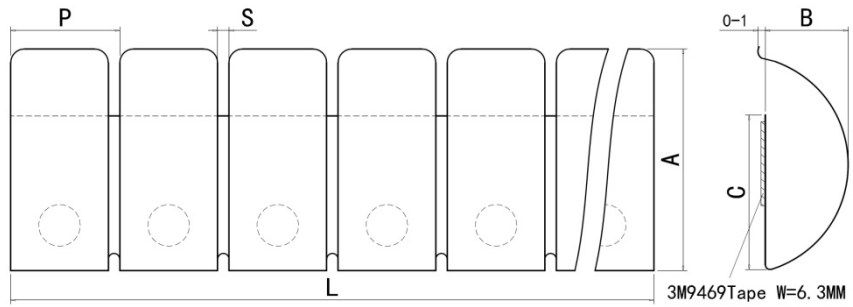

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1538-01	0.127	18.0	6.6	13.5	9.52	1	608 mm	64	Bright Finish
MB-1538C-01	0.127	18.0	6.6	13.5	9.52	1	7.62 M	800	Bright Finish (Coil)
MB-2538-01	0.1	18.0	6.6	13.5	9.52	1	608 mm	64	Bright Finish
MB-3538-01	0.08	18.0	6.6	13.5	9.52	1	608 mm	64	Bright Finish

Notes: ① MB-1538-0N Nickel Plated; MB-1538-0S Tin Plated; Can Plate Gold. Silver & Zinc etc; ② Can cut into X nodes, X=1.2...; ③ Can use 0.1mm & 0.08mm made;



111. MB-1536-01

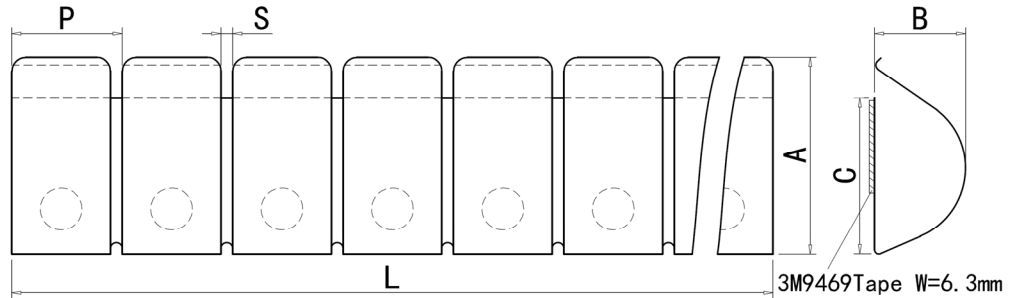

产品料号	T(mm)	A	B	C	P	S	L最长	节数	外观
MB-1536-01	0.127	17	8.5	13.5	9.52	1.01	608.3 mm	64	本色
MB-1536C-01	0.127	17	8.5	13.5	9.52	1.01	7.62 米	800	卷料

注: ① MB-1536-0N 光亮镀锌; MB-1536-0S 光亮镀锡; 表面也可镀金. 银. 锌等; ② 可切1节. 2节...等长度;



112. MB-1537-01

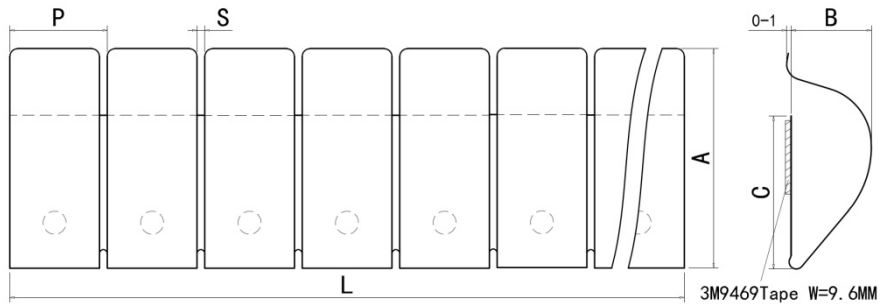

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1537-01	0.15	30	10.3	20.0	12.7	1	609 mm	48	Bright Finish
MB-1537C-01	0.15	30	10.3	20.0	12.7	1	7.62 M	600	Bright Finish (Coil)
MB-2537-01	0.18	30	10.3	20.0	12.7	1	609 mm	48	Bright Finish

Notes: ① MB-1537-0N Nickel Plated; MB-1537-0S Tin Plated; Can Plate Gold. Silver & Zinc etc; ② Can cut into X nodes, X=1.2...; ③ Can use 0.18mm made;



113. MB-1515-01

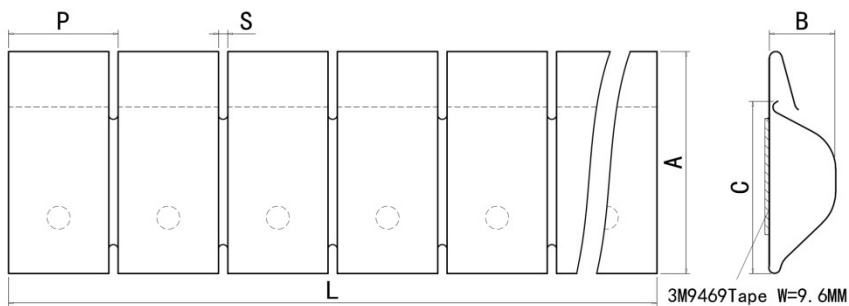

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1515-01	0.1	19.3	5.8	13.5	9.52	0.81	609 mm	64	Bright Finish
MB-1515C-01	0.1	19.3	5.8	13.5	9.52	0.81	7.62 M	800	Bright Finish (Coil)

Notes: ①MB-1515-0N Nickel Plated;MB-1515-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



114. MB-1815-01

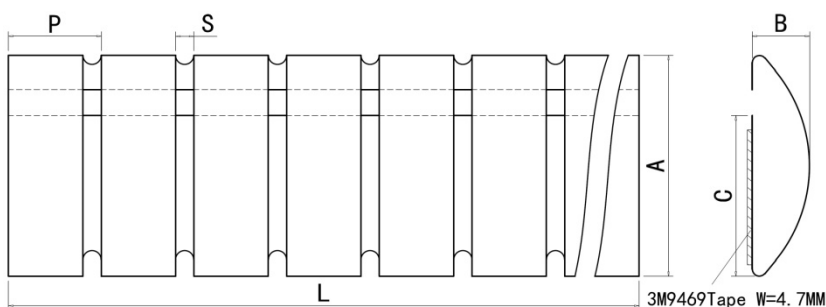

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1815-01	0.08	7.7	2.0	5.3	3.23	0.64	387 mm	120	Bright Finish
MB-2815-01	0.05	7.7	2.0	5.3	3.23	0.64	387 mm	120	Bright Finish

Notes: ①MB-1815-0N Nickel Plated;MB-1815-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;

115. MB-1418-01

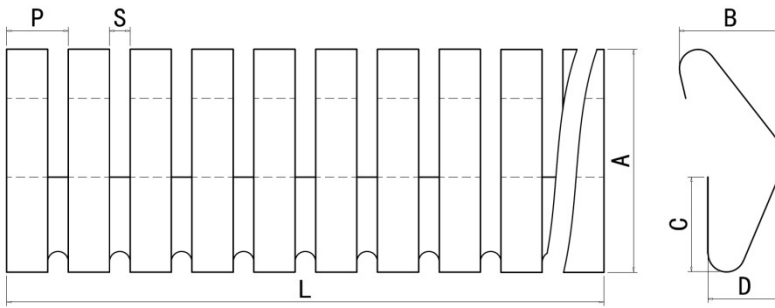


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1418-01	0.05	5.4	2.5	2.3	1.8	1.6	0.6	305 mm	191	Bright Finish

Notes: ①MB-1418-0N Nickel Plated;MB-1418-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;

Seven. Clip-on gasket series (No.116--- No.141; Total 26 Items)



116. MB-1H09-01

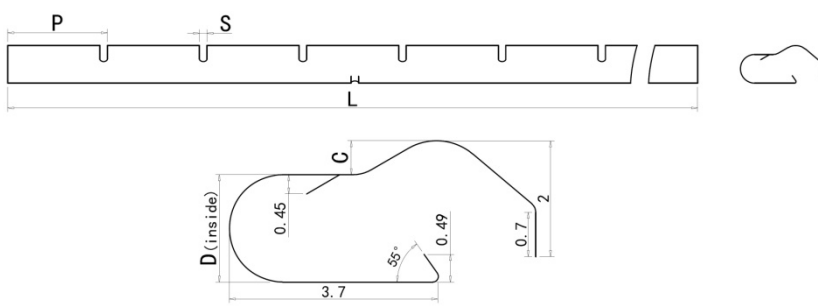

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1H09-01	0.05	5.44	2.5	0.7	1.8	6.63	0.5	397.3 mm	60	Bright Finish

Notes: ①MB-1H09-0N Nickel Plated;MB-1H09-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



117. MB-1613-01

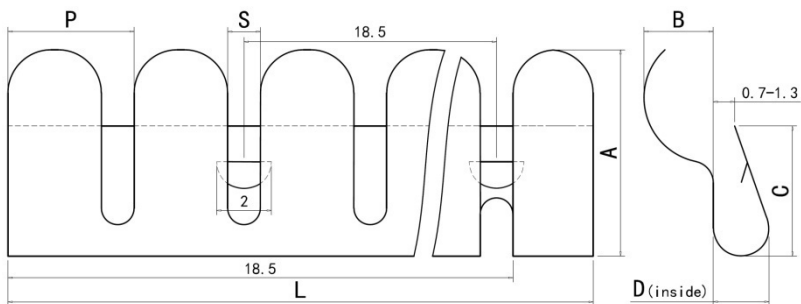

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1613-01	0.127	7.9	2.54	4.75	1.8	4.62	1.2	406 mm	88	Bright Finish (Standard Length)
MB-1613-01	0.127	7.9	2.54	4.75	1.8	4.62	1.2	610 mm	132	Bright Finish (Max Length)
MB-2613-01	0.089	7.9	2.54	4.75	1.8	4.62	1.2	406 mm	88	Bright Finish

Notes:①MB-1613-0N Nickel Plated;MB-1613-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.089mm made;

118. MB-1605-01


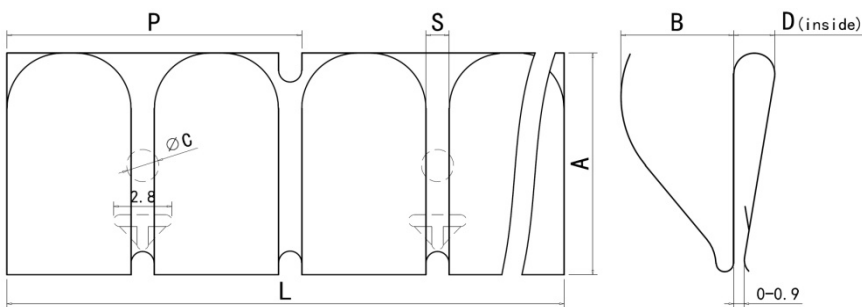



T Shape Lance

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1605-01	0.127	9.52	5.08	1.6	1.6	12.7	1	406 mm	32	Bright Finish (Standard Length)
MB-1605-01	0.127	9.52	5.08	1.6	1.6	12.7	1	609 mm	48	Bright Finish (Max Length)

Notes:①MB-1605-0N Nickel Plated;MB-1605-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can (P=12.7mm)cut into X nodes,X=1.2...;

119. MB-1606-01

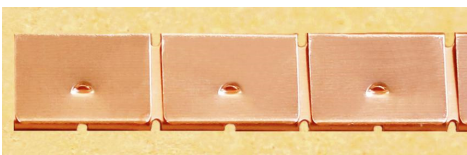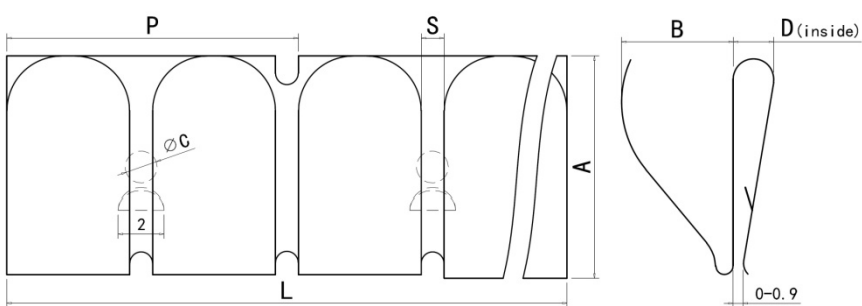



D Shape Lance

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1606-01	0.127	9.52	5.08	1.6	1.6	12.7	1	406 mm	32	Bright Finish (Standard Length)
MB-1606-01	0.127	9.52	5.08	1.6	1.6	12.7	1	609 mm	48	Bright Finish (Max Length)

Notes:①MB-1606-0N Nickel Plated;MB-1606-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can (P=12.7mm)cut into X nodes,X=1.2...;



120. MB-1645-01

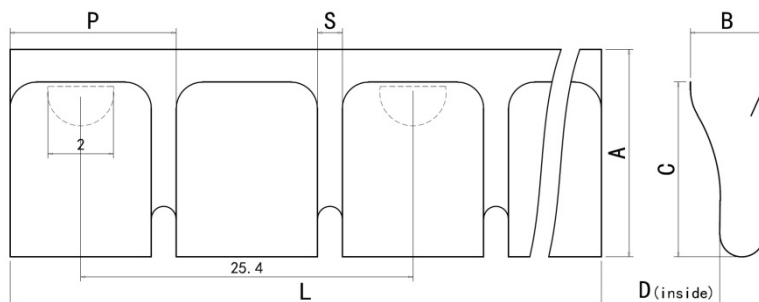

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1645-01	0.08	6.2	1.8	5.3	1.2	5.08	0.76	609 mm	120	Bright Finish

Notes:①MB-1645-0N Nickel Plated;MB-1645-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



121. MB-1374-01

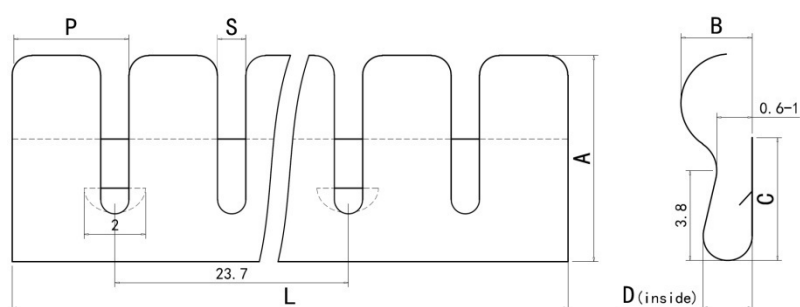

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1374-01	0.127	8.0	2.9	5.0	1.8	4.75	1.12	293 mm	62	Bright Finish

Notes:①MB-1374-0N Nickel Plated;MB-1374-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;



122. MB-1187-01

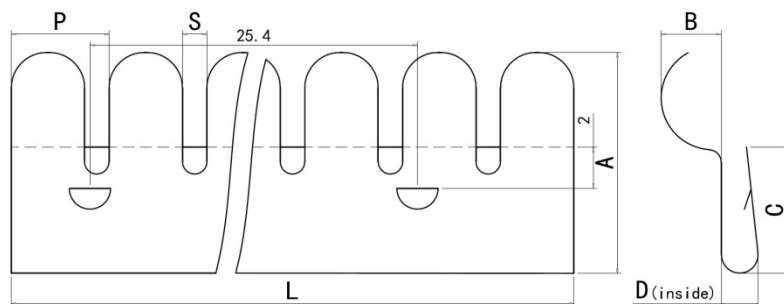

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1187-01	0.127	10.7	3.0	6.1	1.6	4.75	1.19	407 mm	86	Bright Finish

Notes:①MB-1187-0N Nickel Plated;MB-1187-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;



123. MB-1612-01

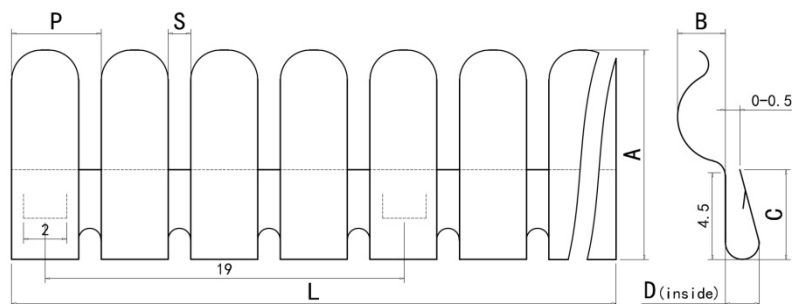

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1612-01	0.08	11.07	2.54	4.75	1.6	4.75	1.19	407 mm	86	Bright Finish (Standard Length)
MB-1612-01	0.08	11.07	2.54	4.75	1.6	4.75	1.19	612 mm	129	Bright Finish (Max Length)

Notes:①MB-1612-0N Nickel Plated;MB-1612-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



124. MB-1637-01

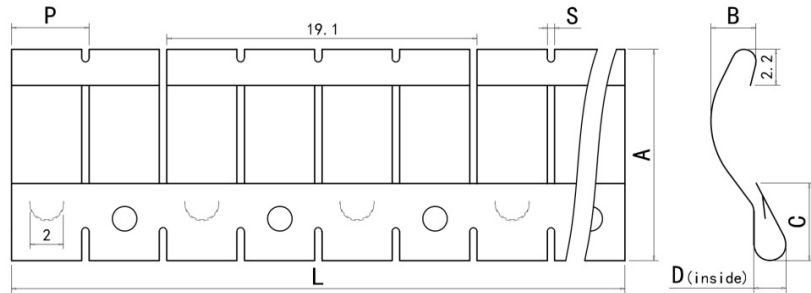

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1637-01	0.08	13	3.5	4.78	1.6	4.78	0.46	406 mm	85	Bright Finish
MB-1637C-01	0.08	13	3.5	4.78	1.6	4.78	0.46	7.62 M	1594	Bright Finish (Coil)

Notes:①MB-1637-0N Nickel Plated;MB-1637-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



125. MB-1874-01

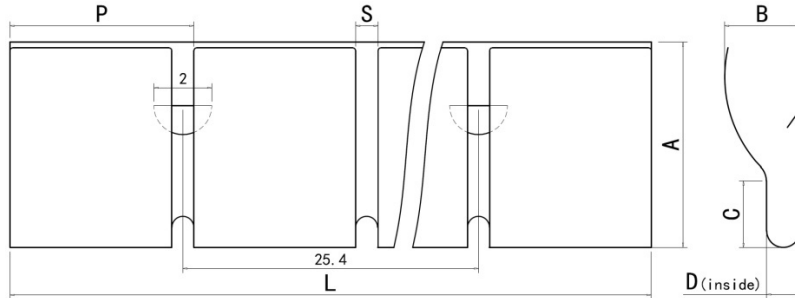

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1874-01	0.089	7.1	2.6	2.3	1.1	6.35	0.7	609 mm	96	Bright Finish

Notes:①MB-1874-0N Nickel Plated;MB-1874-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


126. MB-1655-01

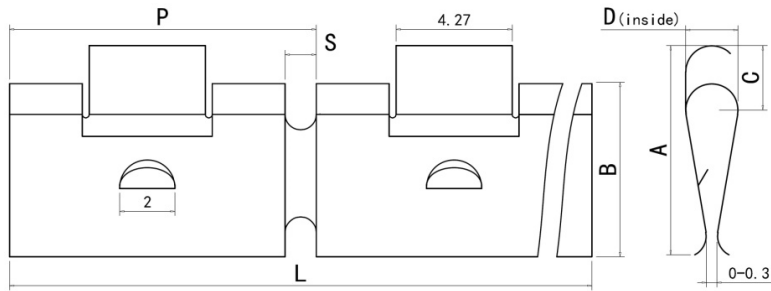

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1655-01	0.089	7.7	6.4	2.4	1.65	13.84	1.15	303 mm	22	Bright Finish (Standard Length)
MB-1655-01	0.089	7.7	6.4	2.4	1.65	13.84	1.15	608 mm	44	Bright Finish (Max Length)

Notes:①MB-1655-0N Nickel Plated;MB-1655-0S Tin Plated; Can Plate Gold, Silver &Zinc etc;② Can (P=13.84mm)cut into X nodes,X=1.2...;


127. MB-1656-01

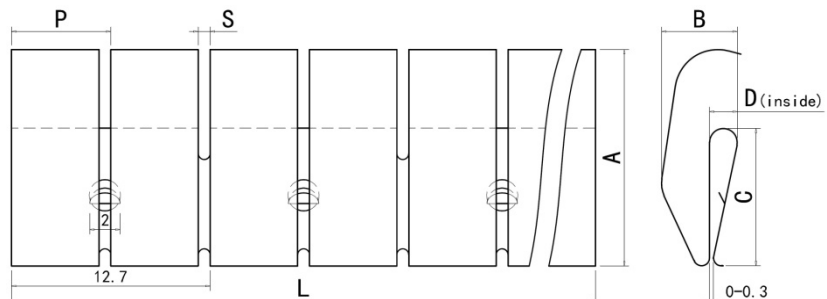

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1656-01	0.1	13.8	4.6	8.9	1.6	6.35	0.76	406 mm	32	Bright Finish (Standard Length)
MB-1656-01	0.1	13.8	4.6	8.9	1.6	6.35	0.76	609 mm	48	Bright Finish (Max Length)

Notes:①MB-1656-0N Nickel Plated;MB-1656-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;② Can (P=12.7mm)cut into X nodes,X=1.2...;



128. MB-1204-01

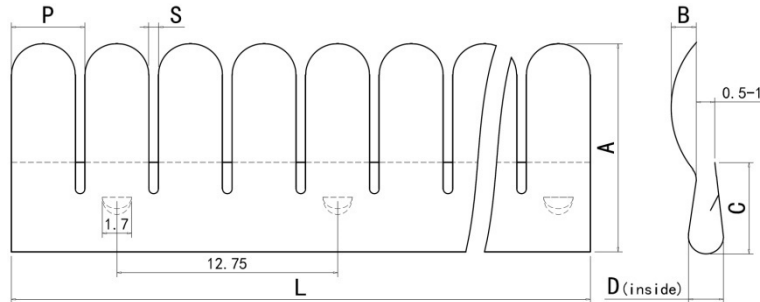

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1204-01	0.127	12	1.65	5.1	1.8	4.25	0.55	408 mm	96	Bright Finish

Notes:①MB-1204-0N Nickel Plated;MB-1204-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;



129. MB-1263-01

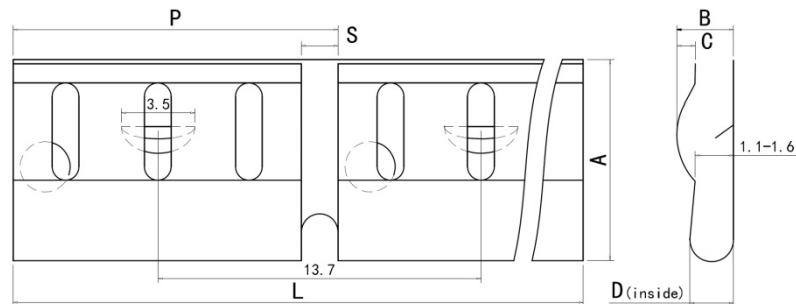

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1263-01	0.08	6.3	1.7	0.5	1.2	13.7	1.1	413 mm	30	Bright Finish (Standard Length)
MB-1263-01	0.08	6.3	1.7	0.5	1.2	13.7	1.1	615 mm	45	Bright Finish (Max Length)

Notes:①MB-1263-0N Nickel Plated;MB-1263-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;② Can (P=13.7mm)cut into X nodes,X=1.2...;



130. MB-1610-01

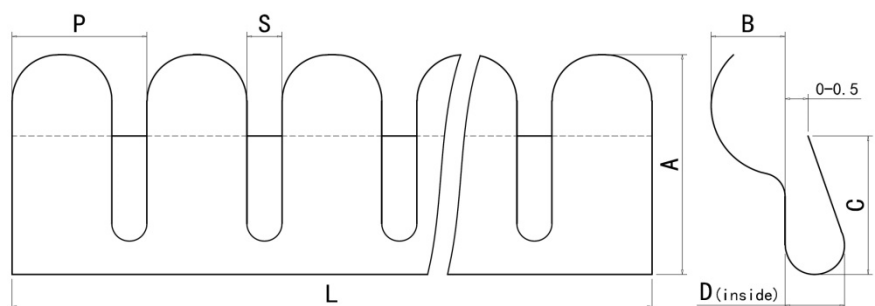

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1610-01	0.127	7.9	2.54	4.75	1.6	4.75	1.2	407 mm	86	Bright Finish

Notes:①MB-1610-0N Nickel Plated;MB-1610-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;


131. MB-1620-01

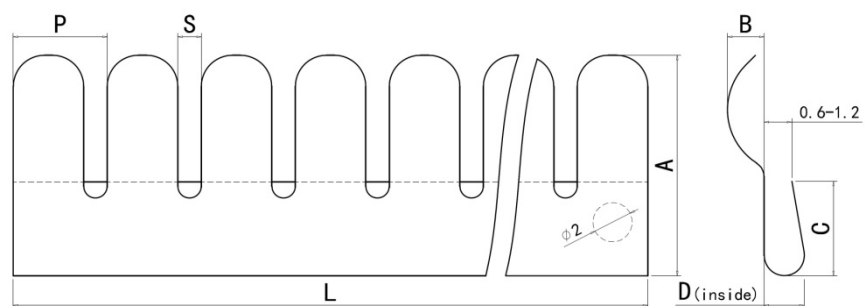

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1620-01	0.127	11	2	4.75	1.8	4.75	1.2	407 mm	86	Bright Finish

Notes:①MB-1620-0N Nickel Plated;MB-1620-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;


132. MB-1630-01

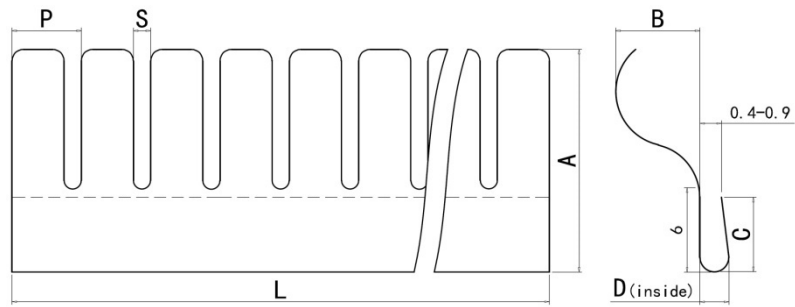

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1630-01	0.1	15	5.8	5.1	1.8	4.78	1.2	410 mm	86	Bright Finish

Notes:①MB-1630-0N Nickel Plated;MB-1630-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;



133. MB-1502-01

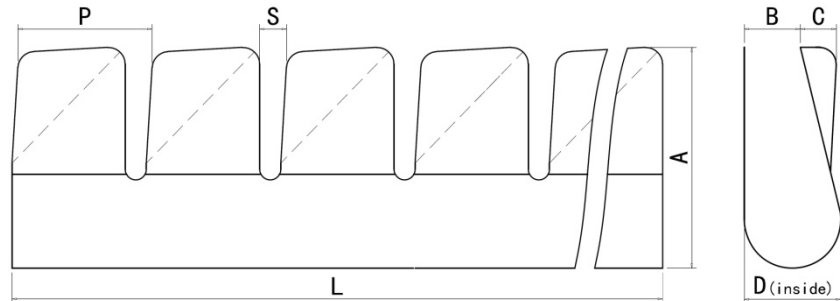

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1502-01	0.08	4.0	0.9	0.75	1.6	2.42	0.38	406 mm	168	Bright Finish
MB-2502-01	0.05	4.0	0.9	0.75	1.6	2.42	0.38	406 mm	168	Bright Finish

Notes:①MB-1502-0N Nickel Plated;MB-1502-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



134. MB-1602-01

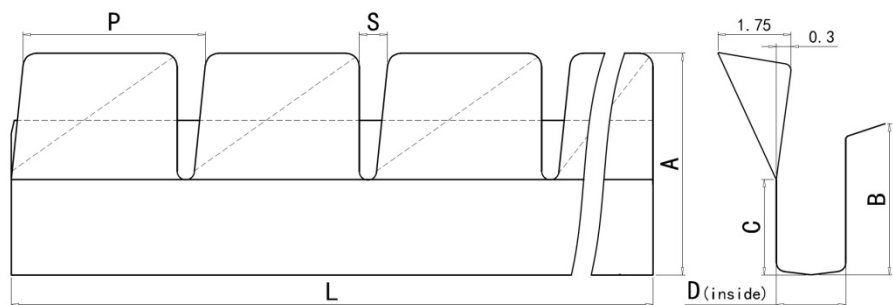

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1602-01	0.08	4.8	3.2	1.60	1.5	4.2	0.4	407 mm	97	Bright Finish
MB-2602-01	0.05	4.8	3.2	1.60	1.5	4.2	0.4	407 mm	97	Bright Finish

Notes:①MB-1602-0N Nickel Plated;MB-1602-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



135. MB-1576-01

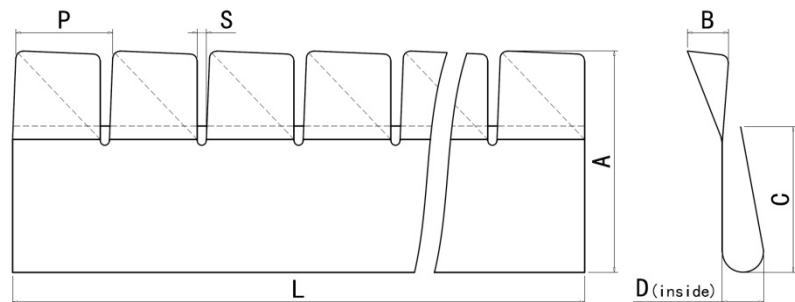

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1576-01	0.08	9.6	1.8	6.35	1.8	4.2	0.4	407 mm	97	Bright Finish
MB-2576-01	0.05	9.6	1.8	6.35	1.8	4.2	0.4	407 mm	97	Bright Finish

Notes:①MB-1576-0N Nickel Plated;MB-1576-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



136. MB-1826-01

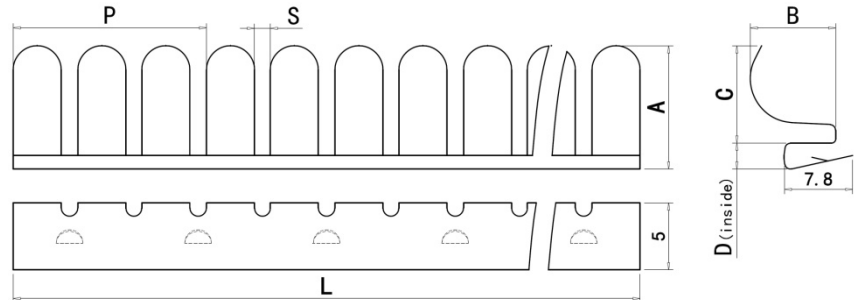

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1826-01	0.12	9.2	6.6	7.30	1.7	9.64	1.19	615.7 mm	128	Bright Finish

Notes:①MB-1826-0N Nickel Plated;MB-1826-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;


137. MB-1371-01

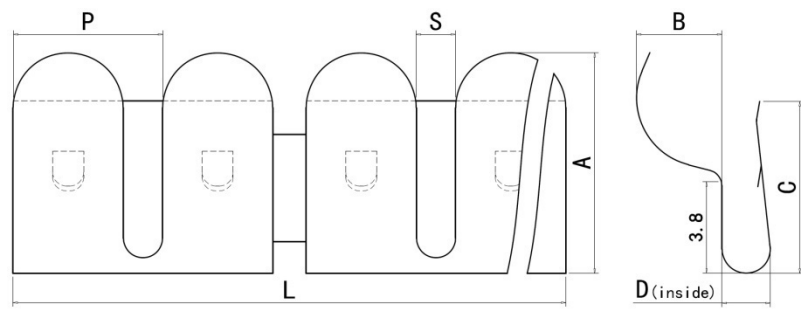

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1371-01	0.127	7.1	2.8	5.50	1.3	4.81	1.26	611 mm	65	Bright Finish

Notes:①MB-1371-0N Nickel Plated;MB-1371-0S Tin Plated; Can Plate Gold. Silver &Zinc etc;

138. MS-1136-01

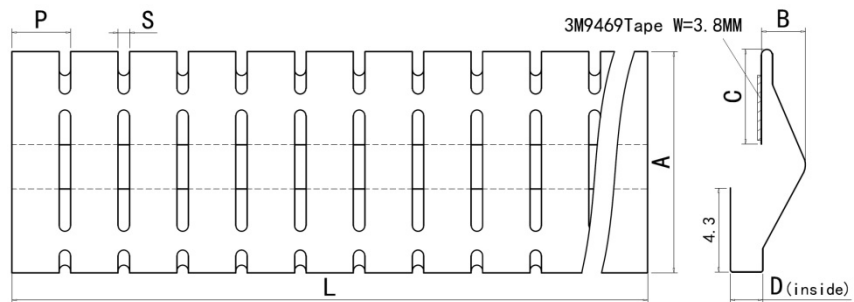


Material: Stainless Steel SUS301-1/2H,T=0.08mm

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MS-1136-01	0.08	11.4	2.4	5.1	1.7	3.18	0.6	368 mm	116	Bright Finish

Notes:Can Paste 3M468 Tape Or Conductive Tape



139. MS-1934-01

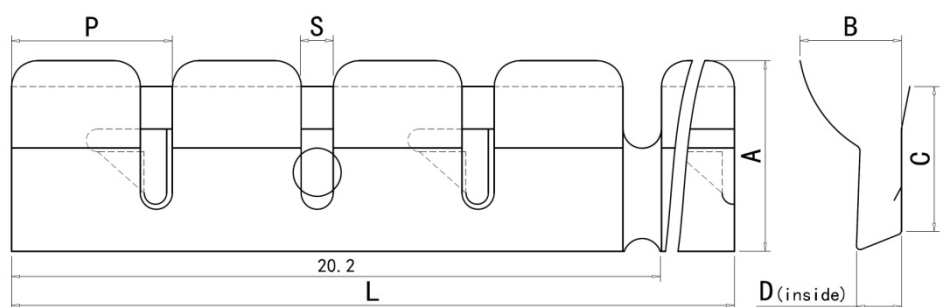

Material: Stainless Steel SUS301-1/2H,T=0.1mm

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MS-1934-01	0.1	5.8	3.5	4.5	1.15	5.0	1	625 mm	124	Bright Finish



140. MS-1833-01

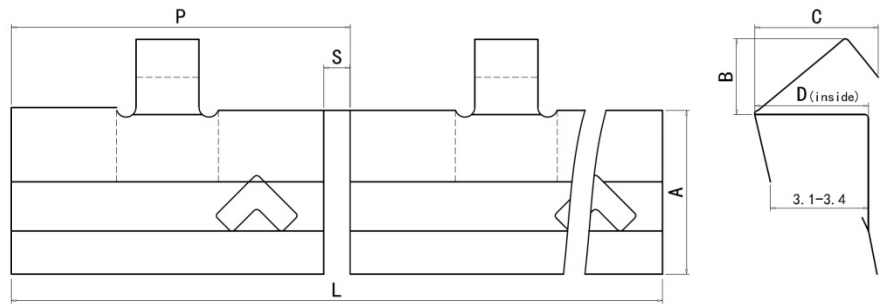

Material: Stainless Steel SUS301-1/2H,T=0.1mm

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MS-1833-01	0.1	4.9	2.15	4	3.3	10.2	0.8	611 mm	60	Bright Finish

141. MS-1336-01

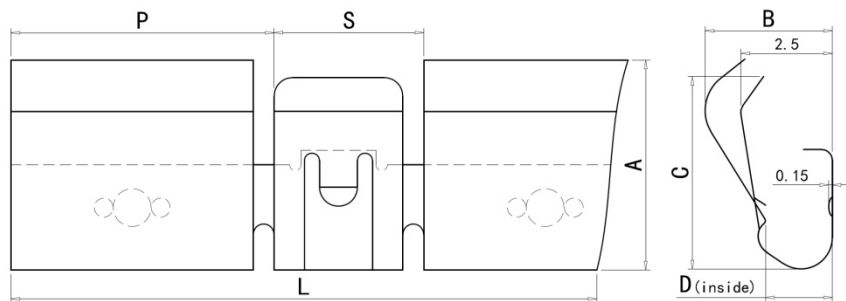


Material: Stainless Steel SUS301-1/2H , T=0.08mm

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MS-1336-01	0.08	5.5	3.7	5.08	1.45	6.95	3.95	610 mm	56 (P+S)	Bright Finish
MS-1336C-01	0.08	5.5	3.7	5.08	1.45	6.95	3.95	7.62 M	700 (P+S)	Bright Finish (Coil)

Notes:① Can (P=6.95 or S=3.95mm)cut into X nodes,X=1,2,...;

Eight. Contact series (No.142---No.162; Total 21 Items)



142. MB-1221-01

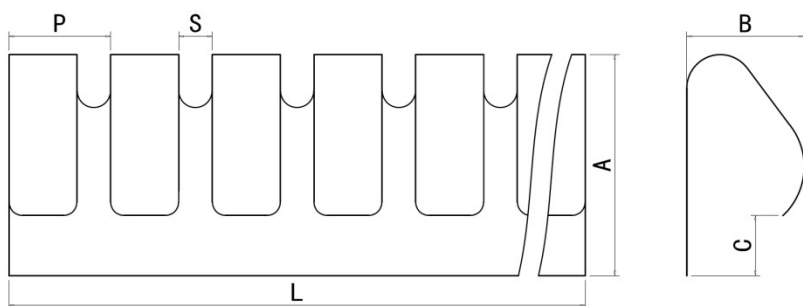

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1221-01	0.1	3.2	1.75	0.8	1.5	0.5	305 mm	204	Bright Finish
MB-1221C-01	0.1	3.2	1.75	0.8	1.5	0.5	7.62 M	5080	Bright Finish (Coil)

Notes:①MB-1221-01N Nickel Plated;MB-1221-01S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1,2,...;



143. MB-1319-01

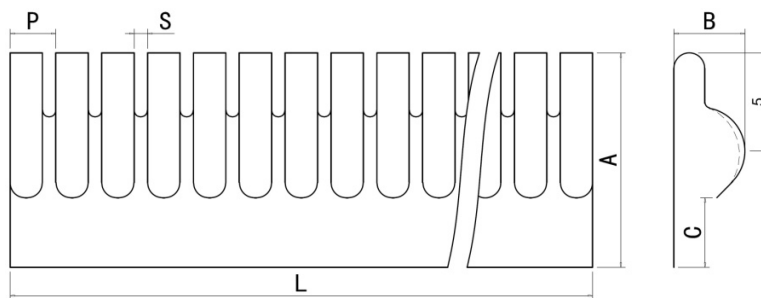

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1319-01	0.25	11	3.8	3.6	2.38	0.63	406 mm	171	Bright Finish
MB-1319C-01	0.25	11	3.8	3.6	2.38	0.63	7.62 M	3201	Bright Finish (Coil)

Notes:①MB-1319-0N Nickel Plated;MB-1319-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


144. MB-1360-01

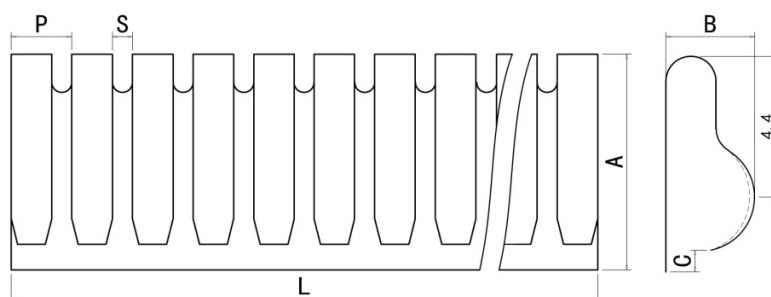

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1360-01	0.15	6.74	2.78	0.4	1.9	0.64	406 mm	214	Bright Finish
MB-1360C-01	0.15	6.74	2.78	0.4	1.9	0.64	7.62 M	4010	Bright Finish (Coil)

Notes:①MB-1360-0N Nickel Plated;MB-1360-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



145. MB-1135-01

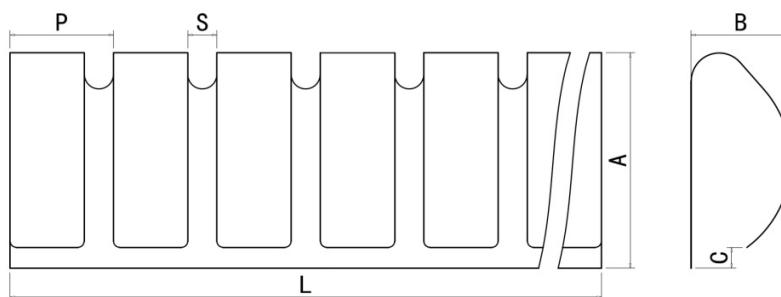

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1135-01	0.25	7.13	3.3	0.7	3.42	0.96	406 mm	119	Bright Finish
MB-1135C-01	0.25	7.13	3.3	0.7	3.42	0.96	7.62 M	2228	Bright Finish (Coil)

Notes:①MB-1135-0N Nickel Plated;MB-1135-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


146. MB-1316-01

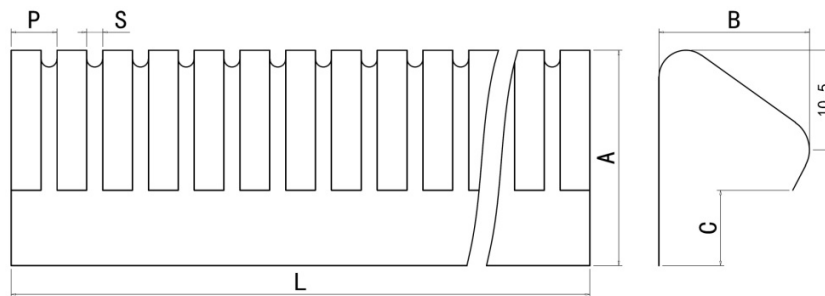

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1316-01	0.25	16	11	5	3.4	1.19	611 mm	180	Bright Finish
MB-1316C-01	0.25	16	11	5	3.4	1.19	7.62 M	2242	Bright Finish (Coil)

Notes:①MB-1316-0N Nickel Plated;MB-1316-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



147. MB-1227-01

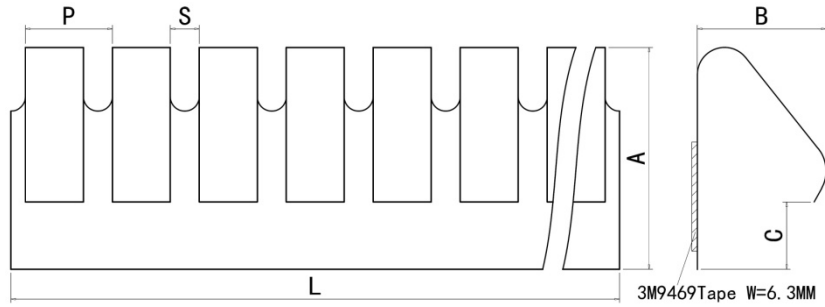

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1227-01	0.15	12.2	7.1	3.5	4.8	1.6	608 mm	127	Bright Finish

Notes: ①MB-1227-0N Nickel Plated;MB-1227-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;



148. MB-1137-01

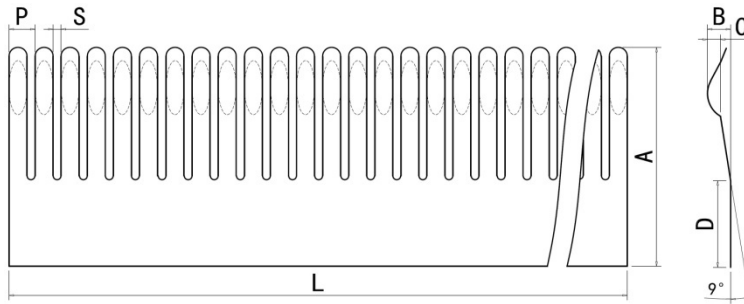

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1137-01	0.25	20	2.8	1.5	8	2.38	0.8	406 mm	170	Bright Finish
MB-1137C-01	0.25	20	2.8	1.5	8	2.38	0.8	7.62 M	3202	Bright Finish (Coil)

Notes: ①MB-1137-0N Nickel Plated;MB-1137-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;



149. MB-1654-01

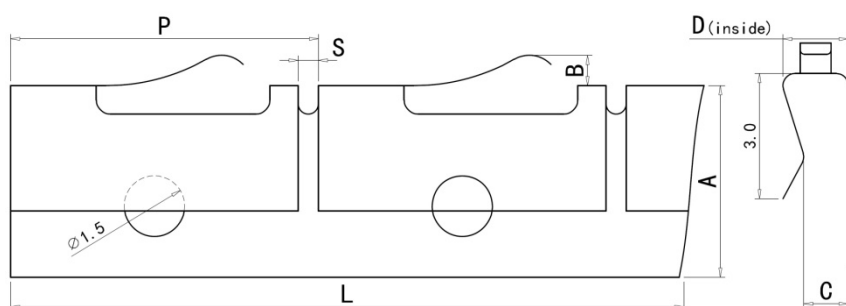

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1654-01	0.08	4.7	0.75	0.95	1.5	7.6	0.5	304 mm	40	Bright Finish
MB-1654-01	0.08	4.7	0.75	0.95	1.5	7.6	0.5	608 mm	80	Bright Finish

Notes: ①MB-1654-0N Nickel Plated;MB-1654-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;



150. MB-1974-01

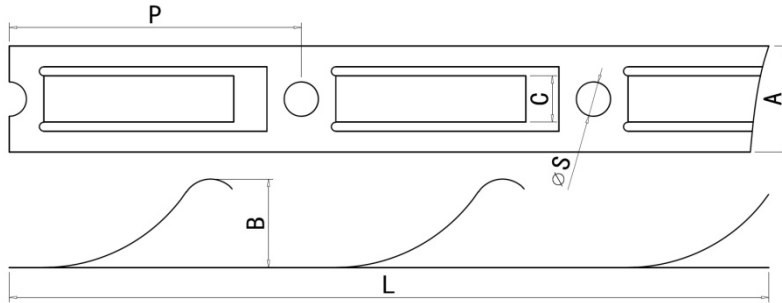

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1974-01	0.127	4.6	3.6	2	12.7	1.4	610 mm	48	Bright Finish

Notes: ①MB-1974-0N Nickel Plated;MB-1974-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;



151. MB-1975-01

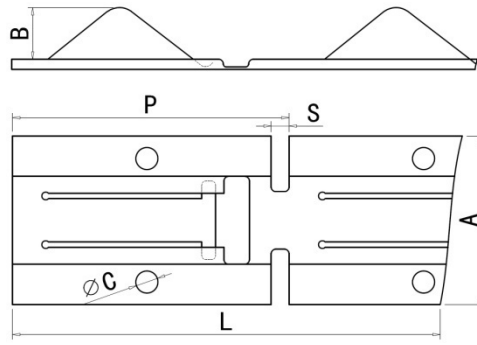

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1975-01	0.127	20.3	6.35	2.75	34	2.2	610 mm	18	Bright Finish

Notes:①MB-1975-0N Nickel Plated;MB-1975-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;




152. MB-1525-01

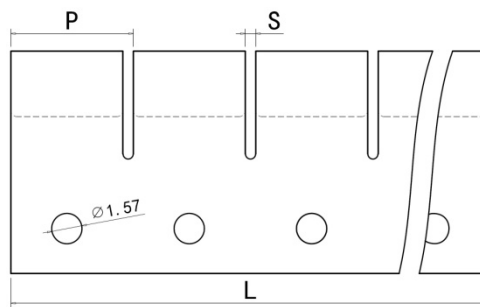

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1525-01	0.08	9.6	3.4	8.0	6.35	0.55	406 mm	64	Bright Finish
MB-1525C-01	0.08	9.6	3.4	8.0	6.35	0.55	7.62 M	1200	Bright Finish (Coil)

Notes:①MB-1525-0N Nickel Plated;MB-1525-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;




153. MB-1420-01

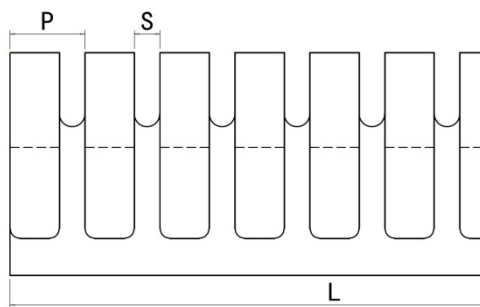

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1420-01	0.15	4.5	2.05	0.7	1.52	0.52	406 mm	267	Bright Finish
MB-1420C-01	0.15	4.5	2.05	0.7	1.52	0.52	7.62 M	5013	Bright Finish (Coil)

Notes:①MB-1420-0N Nickel Plated;MB-1420-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;


154. MB-1482-01

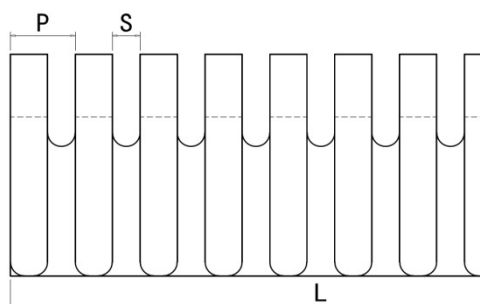

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1482-01	0.1	4.8	2.3	1.4	1.4	0.6	405 mm	290	Bright Finish
MB-1482C-01	0.1	4.8	2.3	1.4	1.4	0.6	7.62 M	5443	Bright Finish (Coil)

Notes:①MB-1482-0N Nickel Plated;MB-1482-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



155. MB-1629-01

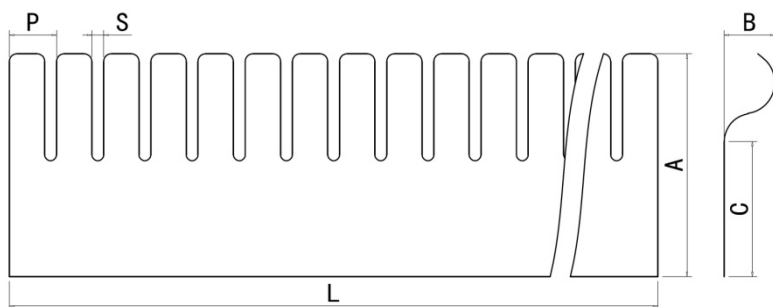

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1629-01	0.1	22.1	5.25	13.6	4.78	1.2	405 mm	85	Bright Finish
MB-1629C-01	0.1	22.1	5.25	13.6	4.78	1.2	7.62 M	1595	Bright Finish (Coil)

Notes:①MB-1629-0N Nickel Plated;MB-1629-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



156. MB-1619-01

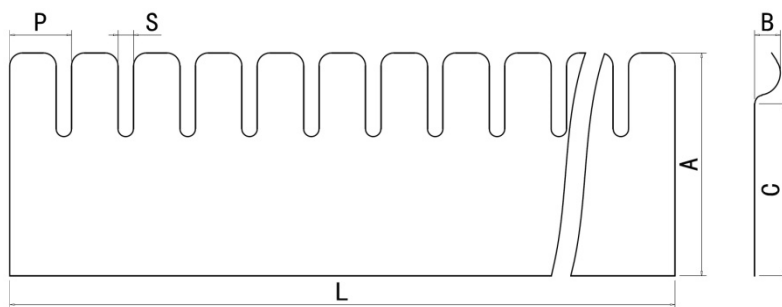

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1619-01	0.1	17.2	2.1	13.6	4.78	1.2	405 mm	85	Bright Finish
MB-1619C-01	0.1	17.2	2.1	13.6	4.78	1.2	7.62 M	1595	Bright Finish (Coil)

Notes:①MB-1619-0N Nickel Plated;MB-1619-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



157. MB-1609-01

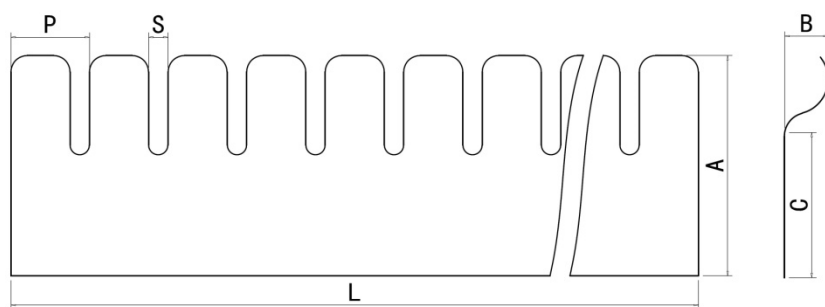

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1609-01	0.1	13.4	2.8	8.6	4.78	1.2	405 mm	85	Bright Finish
MB-1609C-01	0.1	13.4	2.8	8.6	4.78	1.2	7.62 M	1595	Bright Finish (Coil)

Notes:①MB-1609-0N Nickel Plated;MB-1609-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



158. MB-1635-01

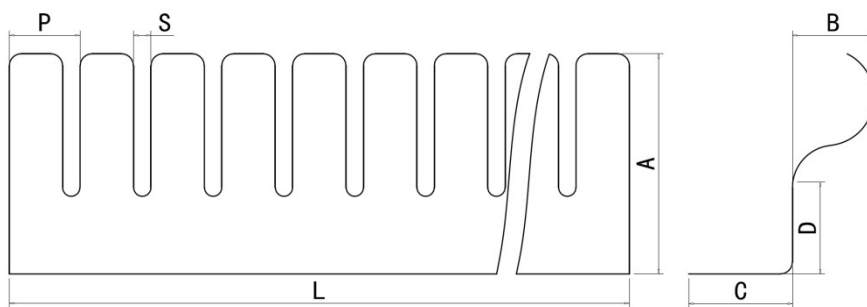

Part Number	T(mm)	A	B	C	D	P	S	L _{max}	Nodes	Finish
MB-1635-01	0.1	15.2	5.3	7	7	4.78	1.2	405 mm	85	Bright Finish

Notes:①MB-1635-0N Nickel Plated;MB-1635-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



159. MB-1258-01

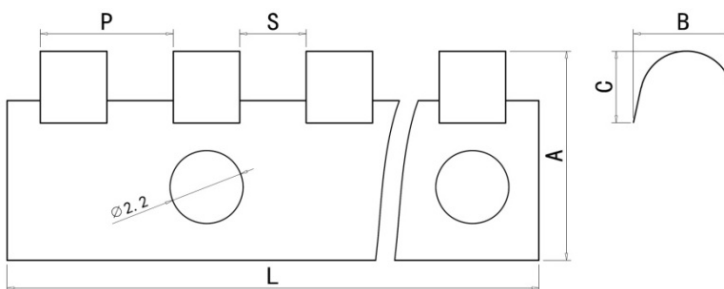

Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish
MB-1258-01	0.1	6.3	3.2	2.1	4	2	610 mm	153	Bright Finish

Notes:①MB-1258-0N Nickel Plated;MB-1258-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



160. MB-1320-01

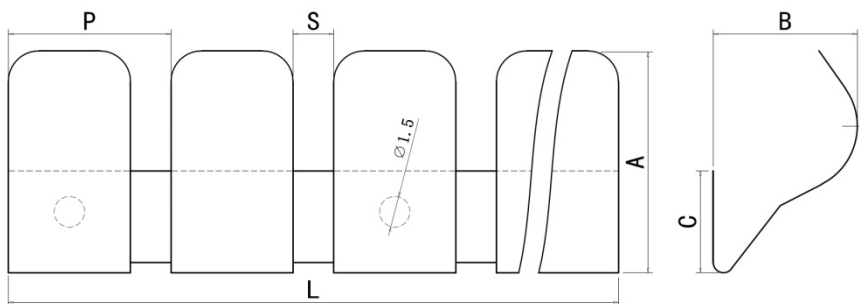

Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish
MB-1320-01	0.08	10.9	7.1	5.0	8	2	614 mm	77	Bright Finish

Notes:①MB-1320-0N Nickel Plated;MB-1320-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;



161. MB-1118-01

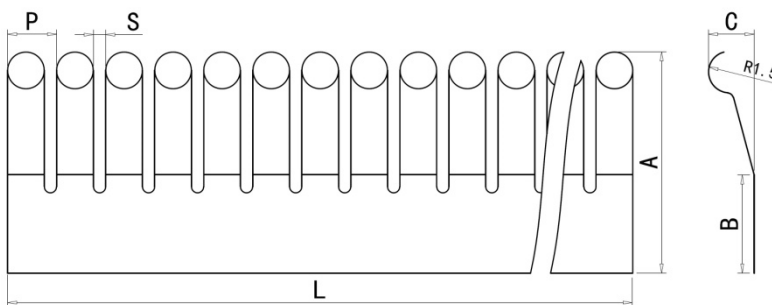

Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish
MB-1118-01	0.2	18.2	8	4.1	4	1	611 mm	153	Bright Finish
MB-1118C-01	0.2	18.2	8	4.1	4	1	7.62 M	1905	Bright Finish (Coil)

Notes:①MB-1118-0N Nickel Plated;MB-1118-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;

162. MB-1008-01

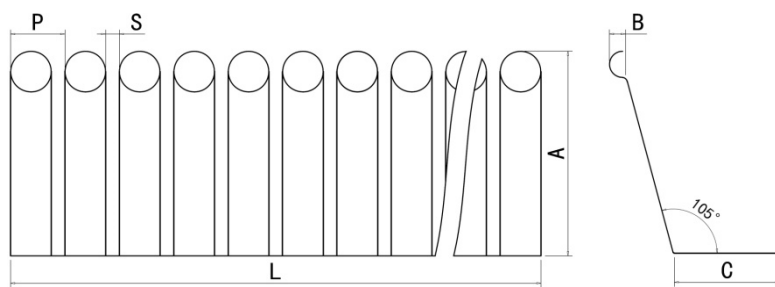



Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1008-01	0.2	15	1.0	8	4	1	611 mm	153	Bright Finish
MB-1008C-01	0.2	15	1.0	8	4	1	7.62 M	1905	Bright Finish (Coil)

Notes:①MB-1008-0N Nickel Plated;MB-1008-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;

Nine. Low Profile Gasket (No.163---No.168; Total 6 Items)



163. MB-1743-01

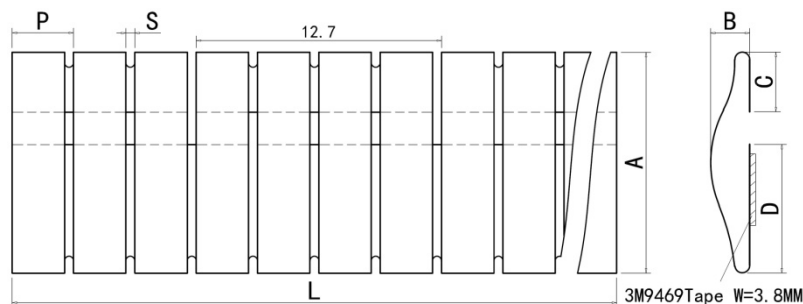

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1743-01	0.089	11.43	2.03	3.04	6.6	3.175	0.46	406 mm	128	Bright Finish
MB-1743C-01	0.089	11.43	2.03	3.04	6.6	3.175	0.46	7.62 M	2400	Bright Finish (Coil)
MB-2743-01	0.05	11.43	2.03	3.04	6.6	3.175	0.46	406 mm	128	Bright Finish

Notes:①MB-1743-0N Nickel Plated;MB-1743-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



164. MB-1749-01

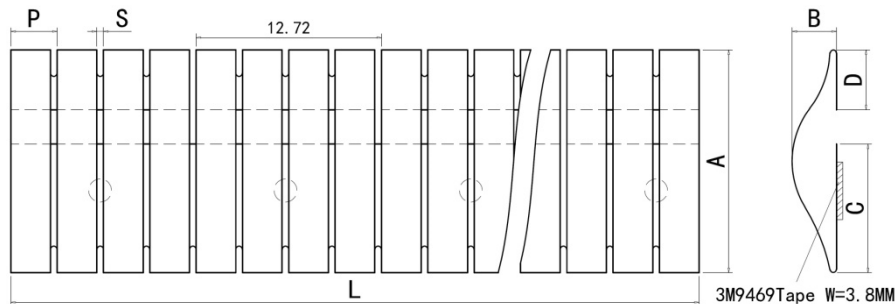

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1749-01	0.089	15.2	3.0	8.8	4.1	3.18	0.46	407 mm	128	Bright Finish
MB-1749C-01	0.089	15.2	3.0	8.8	4.1	3.18	0.46	7.62 M	2396	Bright Finish (Coil)
MB-2749-01	0.05	15.2	3.0	8.8	4.1	3.18	0.46	407 mm	128	Bright Finish

Notes:①MB-1749-0N Nickel Plated;MB-1749-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



165. MB-1071-01

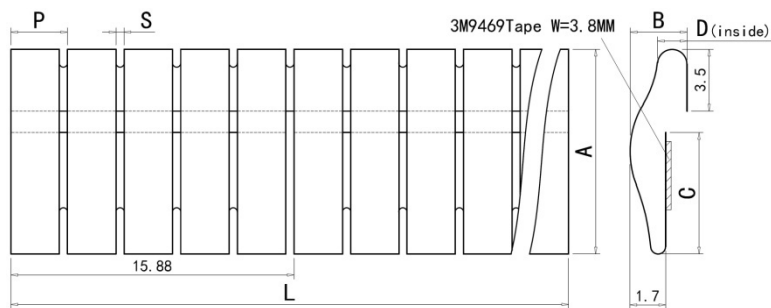

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1071-01	0.08	11.43	3.3	6.7	1.65	3.175	0.46	406 mm	128	Bright Finish
MB-1071C-01	0.08	11.43	3.3	6.7	1.65	3.175	0.46	7.62 M	2400	Bright Finish (Coil)
MB-2071-01	0.05	11.43	3.3	6.7	1.65	3.175	0.46	406 mm	128	Bright Finish

Notes:①MB-1071-0N Nickel Plated;MB-1071-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



166. MB-1772-01

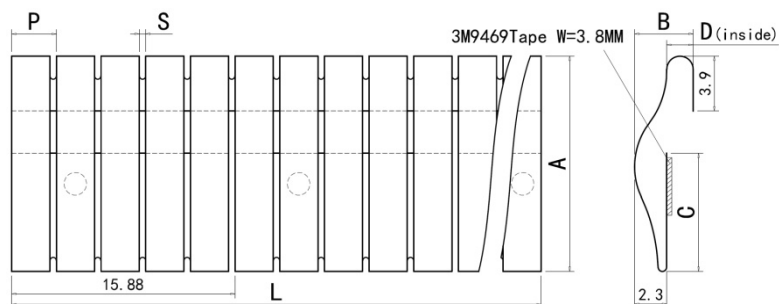

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1772-01	0.08	15.24	3.7	8.4	1.75	3.175	0.46	406 mm	128	Bright Finish
MB-1772C-01	0.08	15.24	3.7	8.4	1.75	3.175	0.46	7.62 M	2400	Bright Finish (Coil)
MB-2772-01	0.05	15.24	3.7	8.4	1.75	3.175	0.46	406 mm	128	Bright Finish

Notes:①MB-1772-0N Nickel Plated;MB-1772-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Can use 0.05mm made;



167. MB-1436-01

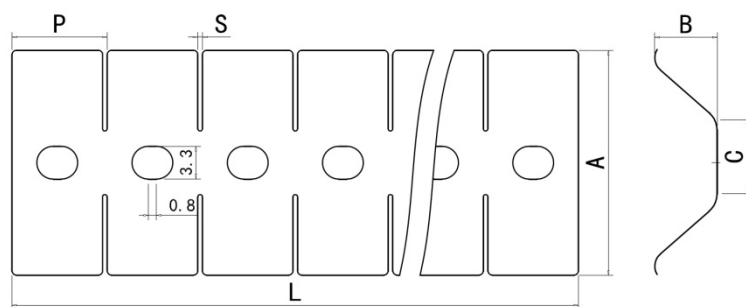

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1436-01	0.1	22.5	6.4	6.2	9.52	0.45	609 mm	64	Bright Finish
MB-1436C-01	0.1	22.5	6.4	6.2	9.52	0.45	7.62 M	800	Bright Finish (Coil)

Notes:①MB-1436-0N Nickel Plated;MB-1436-0S Tin Plated; Can Plate Gold, Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;

168. MB-1941-01

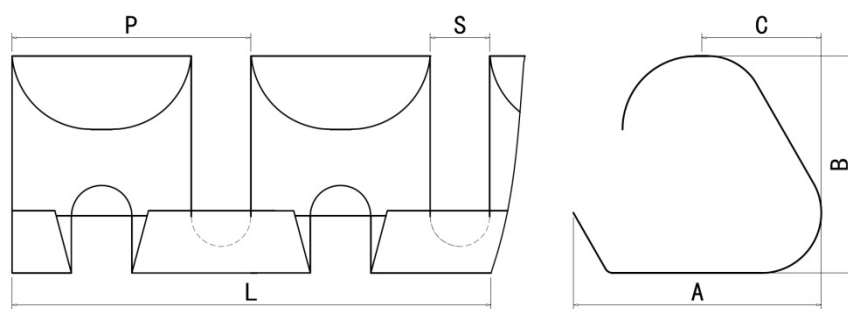


Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish
MB-1941-01	0.08	4.9	4.3	2.3	4.75	1.12	612 mm	128	Bright Finish
MB-1941C-01	0.08	4.9	4.3	2.3	4.75	1.12	7.62 M	1605	Bright Finish (Coil)

Notes:①MB-1941-0N Nickel Plated;MB-1941-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2...;

Ten. Solid Top Symmetrical Slotted Shielding (No.169--No.173; Total 5 Items)


169. MB-1919-01

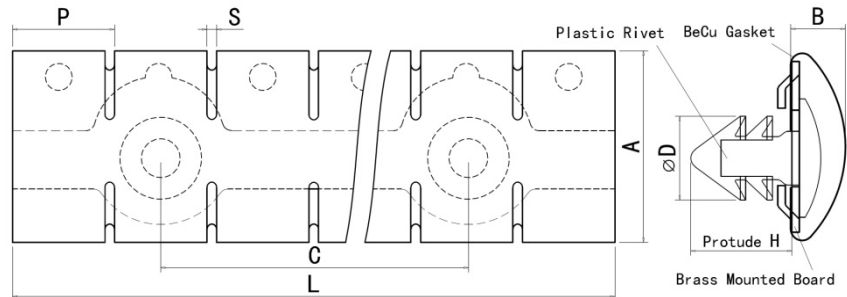

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish	Remarks
MB-1919-01	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Bright Finish	Black Revit: H 5.2mm D 3.8mm;
MB-1919-0N	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Nickel Plated	White Revit: H 8.6mm D 3.5mm;
MB-1919-0S	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Tin Plated	

① The Surface Can be Plated Gold.Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Rivet colors: black & white



170. MB-1958-01

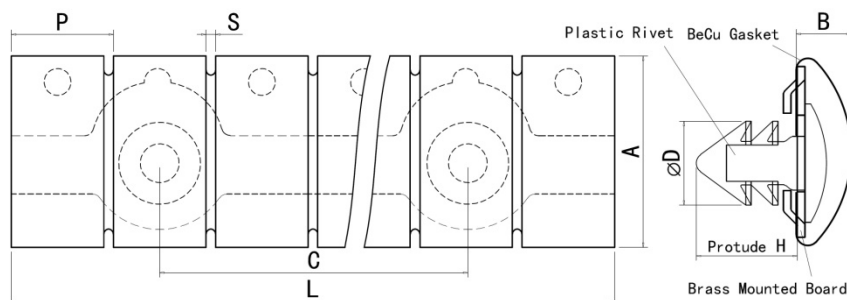

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish	Remarks
MB-1958-01	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Bright Finish	Black Revit: H 5.2mm D 3.8mm;
MB-1958-0N	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Nickel Plated	White Revit: H 8.6mm D 3.5mm;
MB-1958-0S	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Tin Plated	

① The Surface Can be Plated Gold.Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Rivet colors: black & white


171. MB-1959-01

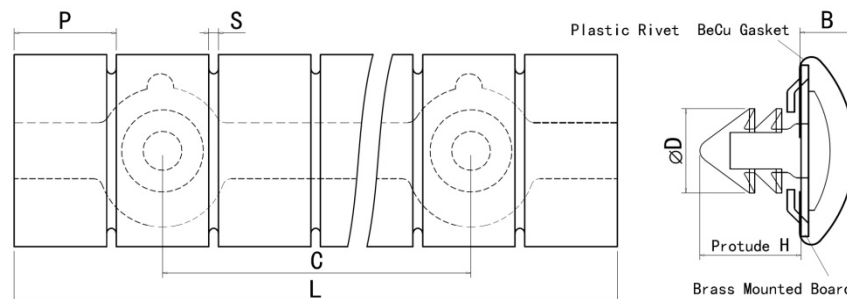

Part Number	T(mm)	A	B	C	P	S	Lmax	Nodes	Finish	Remarks
MB-1959-01	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Bright Finish	Black Revit: H 5.2mm D 3.8mm;
MB-1959-0N	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Nickel Plated	White Revit: H 8.6mm D 3.5mm;
MB-1959-0S	0.0685	8.90	2.8	38.1	4.75	0.46	380 mm	80	Tin Plated	

① The Surface Can be Plated Gold.Silver &Zinc etc; ② Can cut into X nodes,X=1.2...; ③ Rivet colors: black & white


172. MB-1955-01

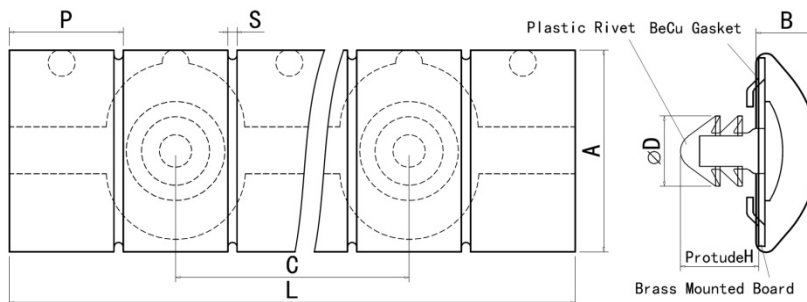

Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish	Remarks
MB-1955-01	0.08	11.43	3.6	38.1	6.35	0.46	380 mm	60	Bright Finish	Black Revit: H 5.2mm D 3.8mm;
MB-1955-0N	0.08	11.43	3.6	38.1	6.35	0.46	380 mm	60	Nickel Plated	White Revit: H 8.6mm D 3.5mm;
MB-1955-0S	0.08	11.43	3.6	38.1	6.35	0.46	380 mm	60	Tin Plated	

① The Surface Can be Plated Gold, Silver & Zinc etc; ② Can cut into X nodes, X=1,2,...; ③ Rivet colors: black & white

173. MB-1952-01


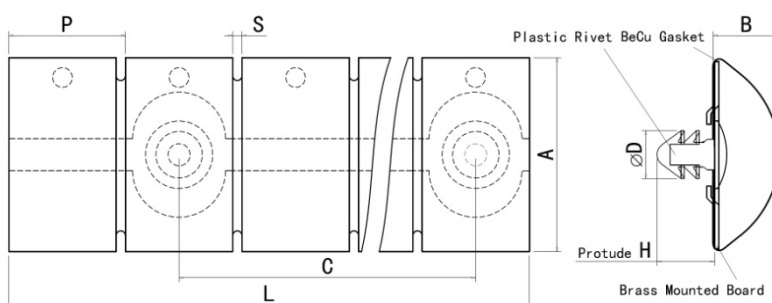


Part Number	T(mm)	A	B	C	P	S	L _{max}	Nodes	Finish	Remarks
MB-1952-01	0.1	15.7	5.58	38.1	9.52	0.76	380 mm	40	Bright Finish	Black Revit: H 5.2mm D 3.8mm;
MB-1952-0N	0.1	15.7	5.58	38.1	9.52	0.76	380 mm	40	Nickel Plated	White Revit: H 8.6mm D 3.5mm;
MB-1952-0S	0.1	15.7	5.58	38.1	9.52	0.76	380 mm	40	Tin Plated	

① The Surface Can be Plated Gold, Silver & Zinc etc; ② Can cut into X nodes, X=1,2,...; ③ Rivet colors: black & white

Eleven. Dome Shape Model Gasket (No.174---No.178; Total 5 Items)



174. MB-1937-01

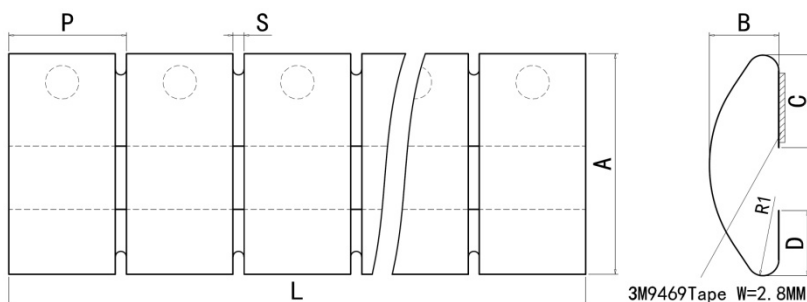

Part Number	T(mm)	A	B	C	D	P	S	L _{max}	Nodes	Finish
MB-1937-01	0.0685	8.90	2.8	3.7	2.54	4.75	0.45	380 mm	80	Bright Finish

Notes: ① MB-1937-0N Nickel Plated; MB-1937-0S Tin Plated; Can Plate Gold, Silver & Zinc etc; ② Can cut into X nodes, X=1,2,...;



175. MB-1917-01

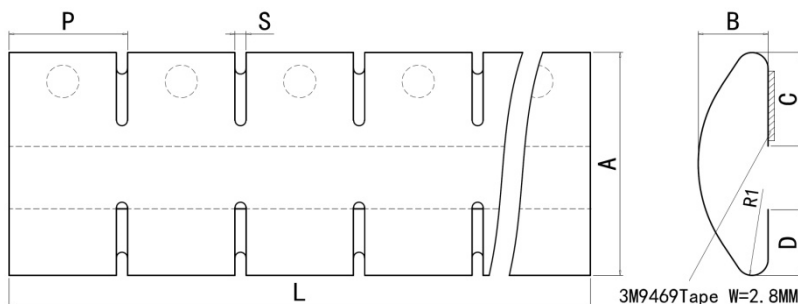

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1917-01	0.0685	8.90	2.8	3.7	2.54	4.75	0.45	380 mm	80	Bright Finish

Notes:①MB-1917-0N Nickel Plated;MB-1917-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;



176. MB-1934-01

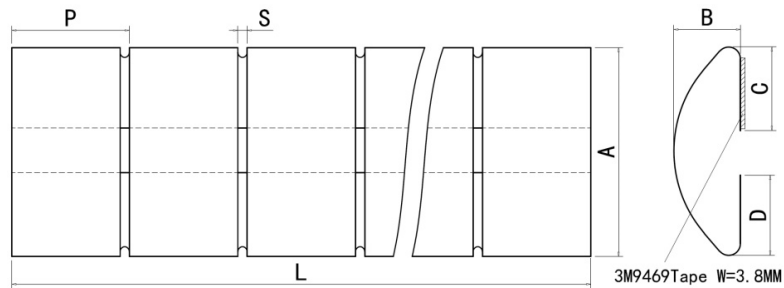

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1934-01	0.08	11.43	3.56	4.5	4.3	6.45	0.46	380 mm	60	Bright Finish

Notes:①MB-1934-0N Nickel Plated;MB-1934-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;



177. MB-1931-01

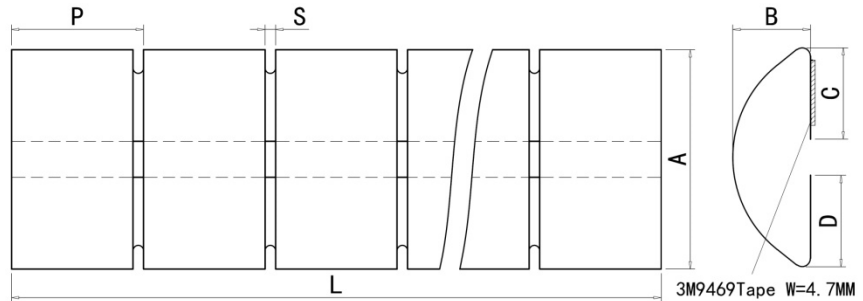

Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1931-01	0.1	15.7	5.58	6.6	6.6	9.52	0.76	380 mm	40	Bright Finish

Notes:①MB-1931-0N Nickel Plated;MB-1931-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;

178. MB-1889-01

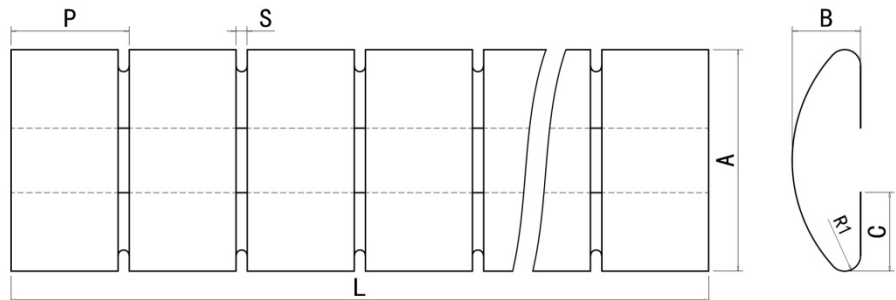


Part Number	T(mm)	A	B	C	D	P	S	Lmax	Nodes	Finish
MB-1889-01	0.0685	8.9	2.8	3.15	3.15	4.75	0.45	380 mm	80	Bright Finish

Notes:①MB-1889-0N Nickel Plated;MB-1889-0S Tin Plated; Can Plate Gold. Silver &Zinc etc; ② Can cut into X nodes,X=1.2....;

Twelve. Assembled Gasket & EMI Spring (No.179--- No.185; Total 7Items)




179. MB-1162-01

Beryllium Copper from U.S.A; T=0.08mm, Surface Plated Nickel. Tin. Zinc etc.

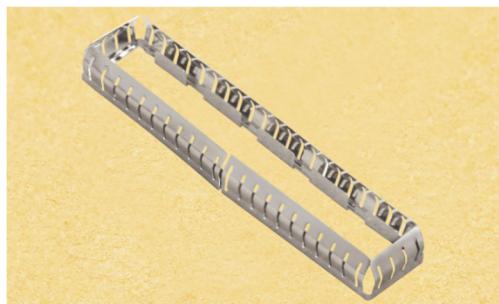


180. MB-1711-MC



Assembled by: Brass T=0.4mm + BeCu Gasket:MB-1711-01 one finger Lmax=2000MM

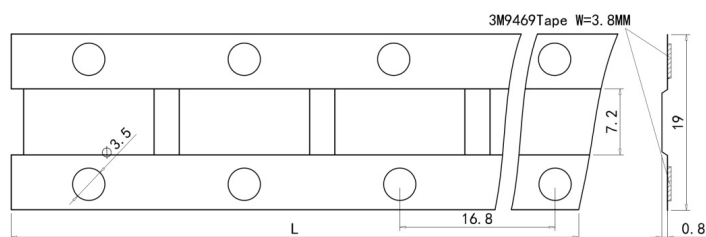

181. MB-HP13-00


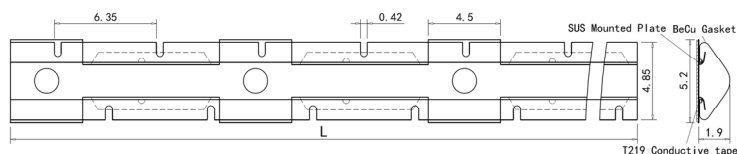


182. MB-1700-01

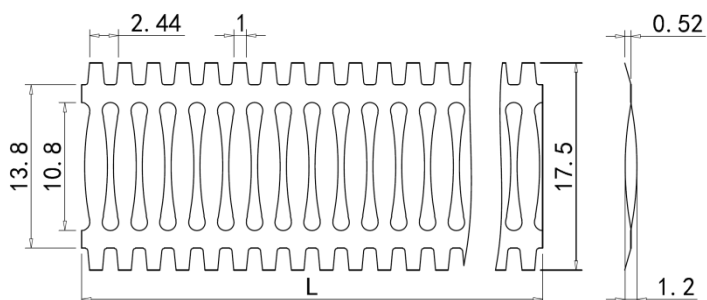


Raw material: T=0.15MM, L =610MM or 7.62 meters .Mainly used for gap filled and conductive surface.

183. MB-1200-01

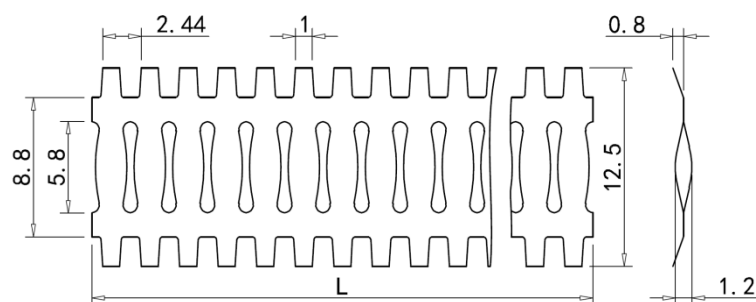

Raw material: T=0.15MM, L =610MM or 7.62 meters .Mainly used for gap filled and conductive surface.

184. MB-5353-01

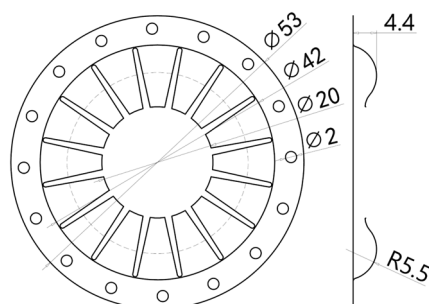


Raw material: T=0.2MM, Mainly used for gap filled and conductive surface. silver plated.

185. Other BeCu Springs

The following 4 items: Material SUS301-1/2H, T=0.1mm



9D/9 Pin(BeCu Can be done)






5D/15 Pin(BeCu Can be done)




25D/25Pin(BeCu Can be done)






37D/37Pin(BeCu Can be done)

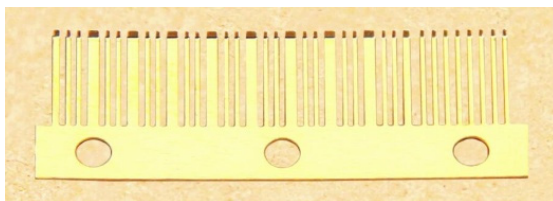

MB-1297-0F (one side)



MB-1297-0F (other side)



-----THE END-----


(The latest product catalog, please visit our website www.emis-tech.com)

Any questions. Pls contact us; E-Mail: sales@emis-tech.com

Factory Profile




Appearance Pictures Of Surface Plated

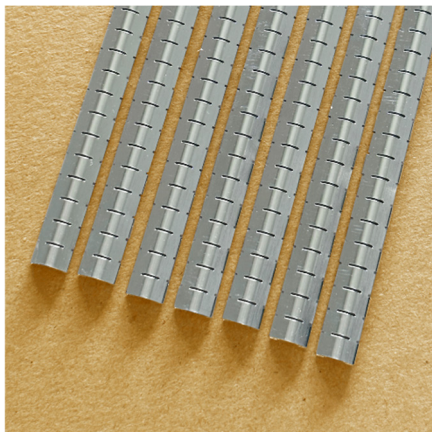

Bright Tin Plated



Bright Nickel Plated



Blue Zinc Plated



Bright Tin Silver



Bright Tin Gold

Company profile:

SHENZHEN EMIS ELECTRON MATERIALS LTD.,CO established in November 8th, 2006, is a high-tech factory specialized in the production of metal Electromagnetic Shielding (EMS) materials, with more than 13 years experience in professional production. The company's fixed assets (RMB) amounts up to 1 USD million; factory workshop: 1000 square meters; production equipments: precision outline; puncher:30 sets; vacuum heat treatment furnace (value:80 thousand USD): a set. All kinds of mold processing equipment and product testing equipment: hundreds of sets. Employees: over 80 people (R&D:3people,mold technician:6; quality controller: 6).

Main products:

- 1.Beryllium copper fingerstock and gasket. BeCu SMD Spring. Beryllium copper Springs. Shielding room shielding strips & SUS Spring.
- 2.R&D and production of a full range of fabric-over-foam (conductive foam);
- 3.Design and manufacture of shielding knitting mesh and shielding honeycomb panel.
- 4.Design and manufacture of conductive copper foil, conductive rubber, ferrite and shielding glasses;
5. All kinds of materials precision stamping parts and toolings;
6. Other types of electronic materials;


In 2008, the company had passed the ISO9001 quality certification system, and all production products meet the EU environmental requirements;

Keeping innovating: let us develop mutually;

Win-win cooperation: let us make progress together;

EMIS company is always by your side and we together with you move towards a better future.ShenZhen EMIS Electronic Materials Co., Ltd, with excellent quality and quick delivery and preferential price, can make constant supplies to customers!

Workrooms structure:

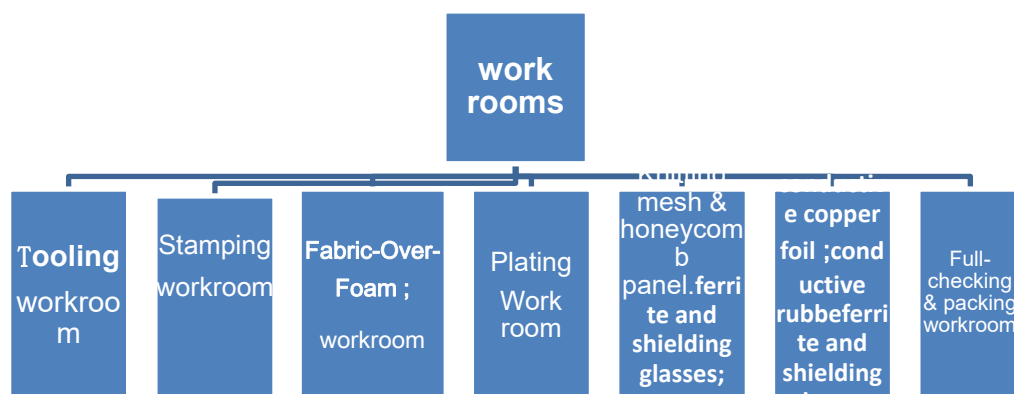

One. Tooling room:

Main Responsibilities

Tooling Design. Toolings Of Manufacturing & Maintenance Etc Of Beryllium Copper Gaskets & Spring. Shielding Room Fingerstock and Precision Stamping Parts.

Advantages Of Our Company:

- 2 Professional Tooling Designers With Over 10 Years Of Design Experience,Having Broken Through The Technical Difficulties Of Stamping.
- Imported Tooling Processing Equipments. Strong Tooling Manufacturing Capacity. Over 20 Sets Of Tooling Can Be Manufactured Each Month.
- Speedy Delivery Time:7 Days For Manual Samples &16 Days For Mass Production

Toolings.

- Extraordinary Tooling Life: Our Company Adopts Special Tooling Materials Which Are Up To 100 Million Times.

Major Equipments:

- | | |
|-------------------------------|---------|
| 1. Milling machine | 3 sets. |
| 2. Drilling machine | 3 sets |
| 3. Precision grinding machine | 4 sets |
| 4. Water grinder | 1 set |
| 5. Other manufacture machines | 5 sets |




die holder I




die holder II



Speedy Stamping (200 Times/M)

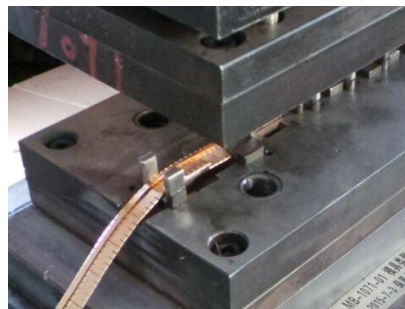

Stamping Tooling

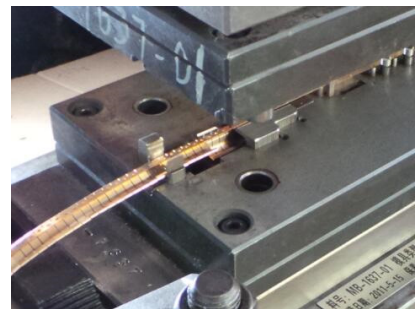

Stamping Tooling

Two. Stamping workroom:

Main Responsibilities:

Manufacturing Of Beryllium Copper Gaskets & Spring. and Precision Stamping Parts.

Advantages Of Our Company:

- High Precision Press: Our Company Mainly Adopts Micro Press Machines From TaiWan To Ensure The Stability Of Equipment.
- Quality Stability: Our Company Has Full-Time Staffs From IQC.IPQC To FQC To Ensure The Quality Stability.
- Rapid Tooling Maintenance: Our Tooling Maintenance Engineers Have More Than 10 Years'Work Experience.
- Common Tooling Parts Are In Stock To Ensure Stability & Continuity Of Production.
- We Have Unique Oil Removal Technology To Ensure Cleanness Of Product Surface.
- High Quality Products = Materials From BrushWellman U.S.A + High Precision Press Machine+ High quality Tooling+ Field Quality Control+ Advanced Oil Removal Technology

Equipments of Stamping Manufacture:

- | | | |
|--|--------|---------|
| 1.Speedy Press Machine From Micron TaiWan | 30 Ton | 2 sets. |
| 2. Speedy Press Machine From Micron TaiWan | 40 Ton | 1 sets. |
| 2. Press Machine | 25Ton | 10sets |
- Manufactured by XuZhou Pressing Machine factory.

- | | | | |
|---------------------|---------|--------|--|
| 3. Press Machine | 40Ton | 10sets | Manufactured by XuZhou Pressing Machine factory. |
| 4. Press Machine | 63Ton | 4 sets | Manufactured by XuZhou Pressing Machine factory. |
| 5. Tapping Machine | 1 set | | |
| 6. Washing Machine | 1 set | | |
| 7. Other equipments | 7 sets. | | |



Speedy Press Machine



Press Machine



Press Machine



Press Machine



Press Machine



Press Machine

Four. Electroplating workroom

Mainly plating Tin. Nickel. Zinc. Gold & Silver. etc with meeting the environmental protection requirements.

Equipments Of Environmental product lines:

- | | |
|---------------------------------------|--------|
| 1. Environmental plating Tin lines: | 2 sets |
| 2. Environmental plating Nickel line: | 1 set |
| 3. Environmental plating Zinc line: | 1 set |
| 4. Other plating line: | 1 set |

Five. Vacuum heat treatment room


Mainly finish vacuum heat treatment after stamping BeCu products.




Vacuum heat treatment oven




Vacuum Oven WI



Heat treatment Before



Heat treatment After




Heat treatment After



Heat treatment After




Heat treatment After




Heat treatment After

Six. Cutting & Paste Tape Full-checking & Package room

Full checking the product according to normal visual inspection after heat treatment. cutting or plating.

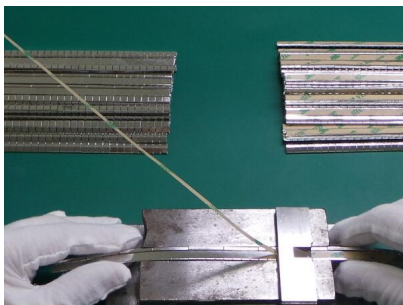

Tape Pasted 1

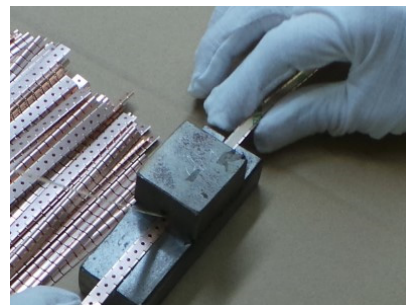

Tape Pasted 2



Full Checking 1



Full Checking 2



Waiting shipment Area




Waiting shipment Area

Seven. Quality Department




Projector instrument




Hardness Tester



Salt spray test machine

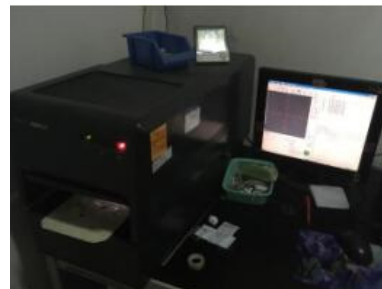

X-Ray thickness meter



ATLAS preventing combustion tester



FT-300A resistance testing instrument

Eight:Raw material of beryllium copper fingerstock and gaskets:

The manufacturer of Shenzhen EMIS Materials Co., Ltd., for the production of metal beryllium copper material is Brushwellman Company in U. S. A; Material specification (before heat treatment): C17200-1/4 or 1/2H (with Beryllium content:1.8%-2.0%) and the heat treatment parameters are provided by Brushwellman; Heat treatment temperature: 315 centigrade(600F). Soak time: 2 hours; hardness after heat treatment: 373HV-430HV or (DPH); our company can provide original material certification and SGS report.

Nine: processes of beryllium copper fingerstock and gasket:

Raw materials(all from Brushwellman company)— Stamping — Remove oil—Vacuum heat treatment— Plating(Ni. Tin. Zinc. Ag. Gold etc)— Cutting(paste 3M tape) — All checking—Package—Shipment;

Ten:Fingerstock & Gaskets Advantages and Characteristics

- 1.Excellent recovery performance: compression of the70% height up to 100 thousand times not deformed;
- 2.Compression performance;
- 3.Anti fatigue property;
- 4.Plating and welding easily;
- 5.Excellent electrical conductivity;
- 6.Ultra low permeability;.
- 7.Corrosion resistance;
- 8.Other excellent performance.

Eleven: Installation methods of finger stock and gaskets:

1.Slot mounting:

Slot mounted parts are easily installed using slots where bi-directional movement is required. Simply install part into one slot and snap it into the second slot or over the edge of frame; Such as:MB-1216-01/1116-01/1136-01 etc;

2.Adhesive mounting:

Sticky finger is an instant pressure-sensitive adhesive bonding system, ideal for all-purpose contact strips foe metal cabinets and electronic enclosures.

Such as MB-1550/551-01;MB-15000/520/521/542/540/541-01 etc;

Notes: Our company used mainly 3M 9469;3M467;conductive tape: 3M 9703

3. Clip-on mounting

Clip -on gaskets hold firmly in place due to their own spring characteristics. available are clip-on gaskets with either "T" or "D" lances.

4.Rivet mounting

Riveting product a tight .long-lasting installation. Either plastic or metal rivets used.

5.Welding

Welded mounting requires simple. traditional welding techniques.

Notes: Other similar mounting methods. Pls reference to our website description.

Tweleve: Part number finger of finger stock and gasket format:

MB-1/2XXX – AA

Notes:

M: represent as Metal ;

B:represent as Beryllium copper ;

1: represent as normal thickness of raw material;

2: represent as thinner thickness or ultra soft process

XXX: represent as unique part No;

AA equal to 00: assembly products; 01: bright finish; ON: plating Ni;

OS:plating Tin; OZ: plating zinc; OG: plating gold; OA: plating Ag.

MS (P) -XXXX - AA

Notes: M: represent as Metal ; S: represent as SUS, other items as above.

Thirteen: questions and keys of fingerstock and gaskets procurement purchase:

Question 1: Listed products in stock?

answer: Common part number are in stock or have dies. Delivery time: within 7days.

Question 2: What information to be provided for quick offer?

answer:

- a. In stock or similar part No;
- b. Product length;
- c. Plating or not; if plating, provide nickel or other plating type.
- d. 3M tape and width if need paste tape;
- e. The estimated quantities.

Question 3: How to calculate the length of the product bought from our company?

answer:

$L = \text{pitch} * \text{fingers quantity} - \text{slot width}$, Need to be discussed if finger quantity is not integer.

Such as MB-1216-01 Length: $L = 4.75 * 86 - 0.45 = 408\text{MM}$

Question 4: The common beryllium copper thickness.

answer:

The beryllium copper of our company used are all from Brushwellman company in U. S. A;
Common thickness: 0.002inch(0.05mm); 0.0031inch(0.08mm); 0.0035inch(0.089mm);
0.004inch(0.10mm); 0.005inch(0.127mm); 0.006inch(0.15mm); 0.008inch(0.2mm);
0.01inch(0.25mm); 0.012inch(0.3mm) ; 0.016inch(0.4mm) and 0.02inch (0.5MM);

Notes: Other thickness materials are not recommended for purchase lead-time is long
& the price very high

Question 5: Product universality options?

answer:

Our company beryllium copper fingerstock and gasket has a strong universality, trying to choose the standard products; if the standard product is not available, please send to us the requirements of the drawings or samples and we' ll make some adjustments to the tooling to meet the product standards according to the requirements of engineering drawing. as for the non-standard ones, for we need to make new tooling, and sometimes raw materials at not available in inventory at present. So it is often the case that the non-standard products are more expensive and are delivered more slowly than the standard ones.

Question 6. The requirements of making manual samples?

Answer:

Many customers make requirements to our company that we can make hand-made samples of the new product, generally using wire cutting shape and simple tooling. Samples can only be used by customers for structural and performance testing purposes.

If you are confused by other things, please contact our sales manager,
Yorkeyxu sales@emis-tech.com or visit our website:
www.emis-tech.com inquiries

ISO &Environmental Protection Files



CERTIFICATE

QUALITY MANAGEMENT SYSTEM

CERTIFICATE

Certificate No.: 18722Q1416R05

We hereby certify that

SHENZHEN EMIS ELECTRON MATERIALS CO. LTD

Unified social credit code: 91440300797996641D

Registered Address: 1st Floor Building A, HongPengFei Industrial Park, XinTian Second Market, GuanLan Town, ShenZhen, China

Operating/production/processing Address: 1st Floor Building A, HongPengFei Industrial Park, XinTian Second Market, GuanLan Town, ShenZhen, China

The established quality management system Compliance with the following standard:

GB/T19001-2016 idt ISO9001:2015

The range of certifications passed is:

Electronic shielding material&Stamping Parts

Surveillance Audit
(The first time)

Surveillance Audit
(The second time)

Issued by:

Date of first issue: December 20, 2022

Date of this issue: December 20, 2022

Date of expiry: December 19, 2025

(The validity of this certificate shall be subject to annual supervision and audit. Whether the certificate continues to be valid shall be subject to whether the supervision mark is posted)

中国认可
国际互认
管理体系
MANAGEMENT SYSTEM
CNAS C243-M



Report No. A2200128447101001

Page 3 of 7

Test Result(s)

Tested Item(s)	Result	MDL	Limit
Lead(Pb)	N.D.	2 mg/kg	1000 mg/kg
Cadmium(Cd)	N.D.	2 mg/kg	100 mg/kg
Mercury(Hg)	N.D.	2 mg/kg	1000 mg/kg
Hexavalent Chromium(Cr(VI))	N.D.	0.10 µg/cm ² (LOQ)	1000 mg/kg

Tested Item(s)	Result	MDL	Limit
Polybrominated Biphenyls(PBBs)			
Monobromobiphenyl	N.D.	5 mg/kg	1000 mg/kg
Dibromobiphenyl	N.D.	5 mg/kg	
Tri bromobiphenyl	N.D.	5 mg/kg	
Tetrabromobiphenyl	N.D.	5 mg/kg	
Pentabromobiphenyl	N.D.	5 mg/kg	
Hexabromobiphenyl	N.D.	5 mg/kg	
Heptabromobiphenyl	N.D.	5 mg/kg	
Octabromobiphenyl	N.D.	5 mg/kg	
Nonabromobiphenyl	N.D.	5 mg/kg	
Decabromobiphenyl	N.D.	5 mg/kg	

Tested Item(s)	Result	MDL	Limit
Polybrominated Diphenyl Ethers (PBDEs)			
Monobromodiphenyl ether	N.D.	5 mg/kg	1000 mg/kg
Dibromodiphenyl ether	N.D.	5 mg/kg	
Tri bromodiphenyl ether	N.D.	5 mg/kg	
Tetrabromodiphenyl ether	N.D.	5 mg/kg	
Pentabromodiphenyl ether	N.D.	5 mg/kg	
Hexabromodiphenyl ether	N.D.	5 mg/kg	
Heptabromodiphenyl ether	N.D.	5 mg/kg	
Octabromodiphenyl ether	N.D.	5 mg/kg	
Nonabromodiphenyl ether	N.D.	5 mg/kg	
Decabromodiphenyl ether	N.D.	5 mg/kg	

The End